




FlexFob

YS3604-UC

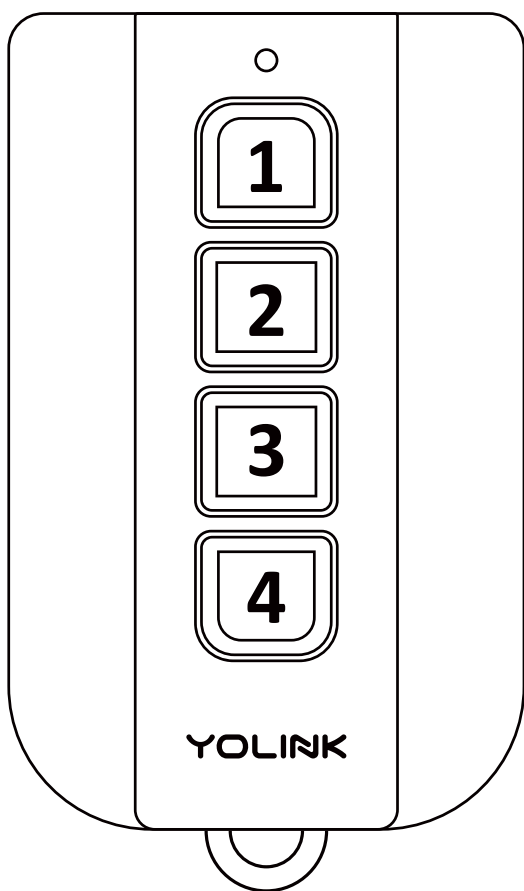

Installation & User Guide

Revision Jun. 11, 2026

Contents

A . Welcome!	01
B . Before You Begin	02
C . In the Box	04
D . Get to Know Your FlexFob	04
E . Power Up	05
F . Install the App	06
G . Add Your Fob to the App	07
H . What Can I Do With My FlexFob	09
I . App Functions: Device Screen	12
J . App Functions: Device Details Screen	13
K . App Functions: Program Buttons	14
L . App Functions: Device Control	16
M . App Functions: Scenes	20
N . App Functions: Alarm Strategies	24
O . App Functions: Notifications	25
P . 3rd Party Services: Alexa	28
Q . 3rd Party Services: IFTTT	30
R . 3rd Party Services: Home Assistant	31
S . Control-D2D	32
T . Battery Replacement	35
U . Firmware Updates	37
V . Factory Reset	39
W . Specifications	40
X . Troubleshooting	42
Y . Warnings	43
Z . Warranty	44
AA. FCC Statement	45
AB. Contact Us	47

If you have completed the set-up of your FlexFob using the quick start guide, you can proceed to section H



Welcome!

Thank you for purchasing YoLink products! We appreciate you trusting YoLink for your smart home & automation needs. Your 100% satisfaction is our goal. If you experience any problems with your installation, with our products or if you have any questions that this manual does not answer, please contact us right away. See the Contact Us section for more info.

Thank you!

YoLink Customer Support

User Guide Conventions

The following icons are used in this guide to convey specific types of information:



Very important information
(can save you time!)



Good to know info but may not
apply to you

B Before You Begin

Visit our FlexFob support page on our website, for the latest installation guides, additional resources, information and videos by visiting:

<https://www.yosmart.com/support/YS3604-UC>

Or by scanning the QR code:



Download the most current version of the user guide by scanning the QR code:




B Before You Begin, Continued




Your FlexFob connects to the internet via a YoLink hub, and it does not connect directly to your WiFi or local network. In order for remote access to the device from the app, and for full functionality, a hub is required.

This guide assumes the YoLink app has been installed on your smartphone, and a YoLink hub is installed and online (or your location, apartment, condo, etcetera, is already served by a YoLink wireless network).


C In the Box

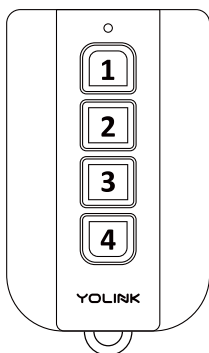

FlexFob




Quick Start Guide



AAA Batteries (2) Installed

D Get to Know Your FlexFob

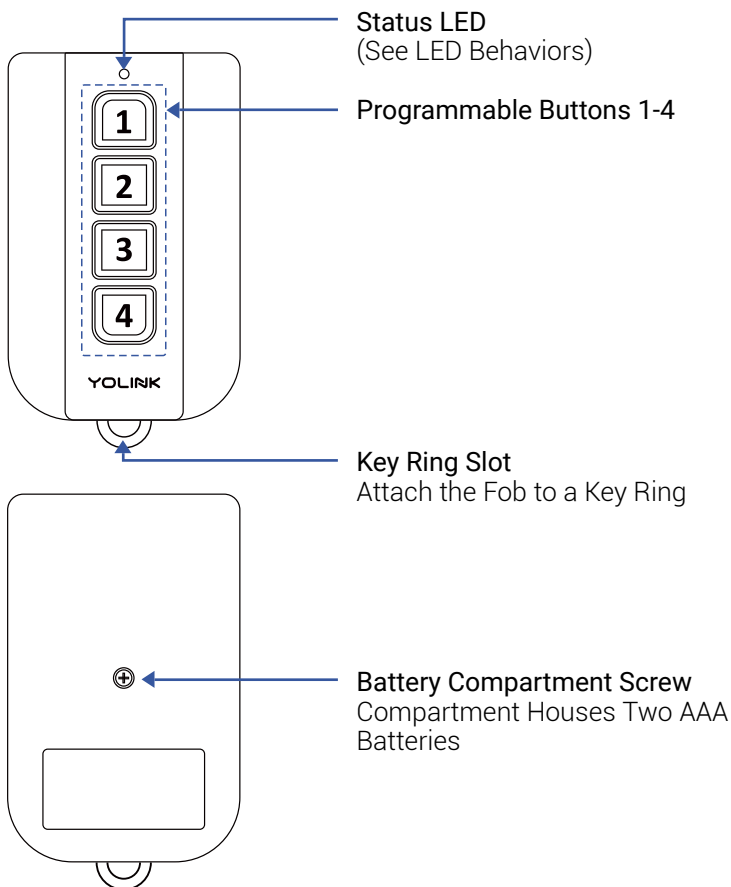

D

Get to Know Your FlexFob, Continued

LED & Beep Behaviors



Blinking Red Once, Then Green Once
Device Power Up



Blinking Red And Green Alternately
Restoring to Factory Defaults



Blinking Green Once
Button Pressed



Slow Blinking Green Once



With One Beep
Action Ran Successfully



Slow Blinking Red Once With Three Beeps
Action Failed to Run



Blinking Green Twice
Connecting to Cloud



Quick Blinking Green
Control-D2D Pairing in Progress



Quick Blinking Red
Control-D2D Unpairing in Progress



Slow Blinking Green
Updating




or



Fast Blinking Red Every 30 Seconds or Fast Blinking Red 5 Times when pressing the SET Button
Batteries are Low, Please Replace the Batteries

E

Power Up

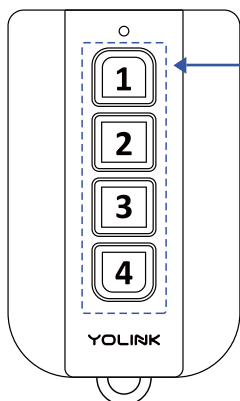

Press any button on your fob briefly.
Observe the LED blinks red then green.



Install the App

If you are new to YoLink, please install the app on your phone or tablet, if you have not already. Otherwise, please proceed to the next section.

Scan the appropriate QR code below or find the “YoLink app” on the appropriate app store.



Apple phone/tablet
iOS 9.0 or higher



Android phone/tablet
6.0 or higher

Open the app and tap **Sign up for an account**. You will be required to provide a username and a password. Follow the instructions, to set up a new account. Allow notifications, when prompted.

You will immediately receive a welcome email from no-reply@yosmart.com with some helpful information. Please mark the yosmart.com domain as safe, to ensure you receive important messages in the future.


Log in to the app using your new username and password.

The app opens to the **Favorite** screen. This is where your favorite devices and scenes will be shown. You can organize your devices by room, in the **Rooms** screen, later.




Add Your Fob to the App

1. Tap **Add Device** (if shown) or tap the scanner icon:

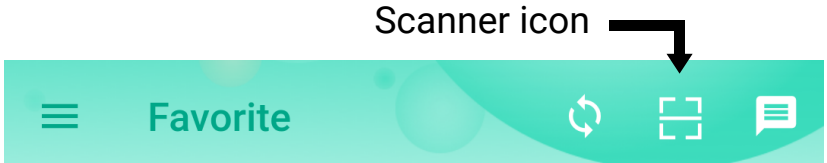

2. Approve access to your phone's camera, if requested. A viewfinder will be shown on the app.

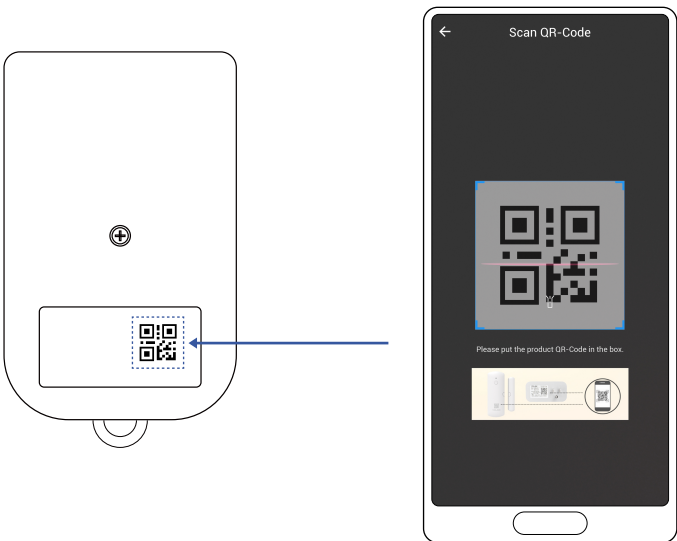


3. Hold the phone over the QR code so that the code appears in the viewfinder. If successful, the **Add Device** screen will be displayed.



Add Your Fob to the App, Continued

4. You can change the device name and assign it to a room later. Tap **Bind device**.

5. If successful, the screen will appear as shown. Tap **Done**.

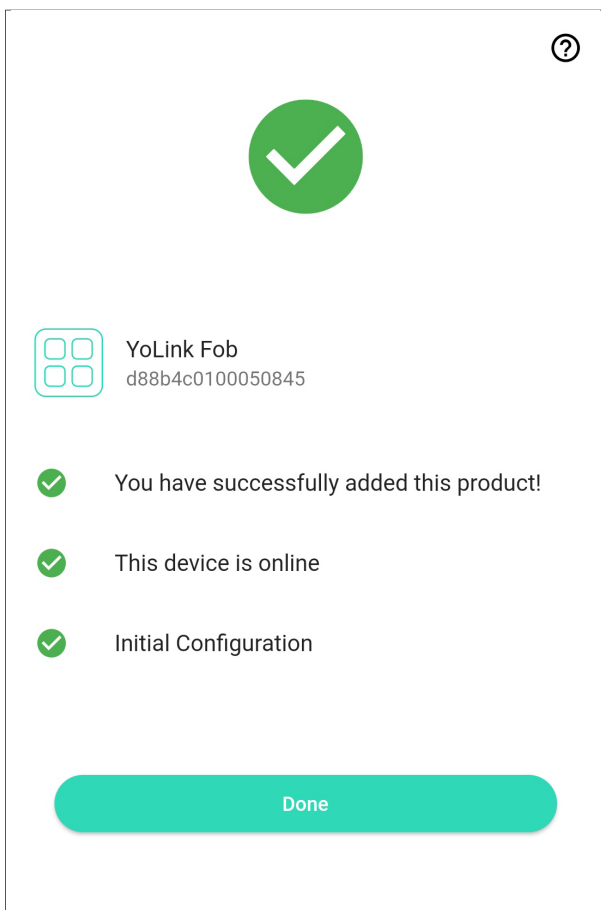



What Can I Do With My FlexFob

Before you begin using your FlexFob, and to get the most out of your purchase, you should be familiar with how the FlexFob's programmable buttons work, and what your FlexFob can do. The FlexFob has four programmable, customizable ("flexible") buttons. You operate the buttons by either a short press or a long press, each of which can result in a different response or action. The response/action depends on the programming settings of the button, of course.

In addition to YoLink-specific functions, referred to as "behaviors", (like controlling a YoLink device or scene), the FlexFob can also be used with third-party applications, including Alexa routines, IFTTT applets, and with Home Assistant (like controlling a Lutron brand light switch or a Roomba robot vacuum cleaner). Please note: the button functions available to these third-party applications are in addition to the YoLink-specific functions (for example, a press of button 1 might control a YoLink smart plug as well as activate an IFTTT routine). For more information on using your FlexFob with one or more of these third-party applications, refer to page 28.



What Can I Do With My FlexFob, Continued

Your FlexFob can directly control compatible YoLink devices, such as siren products, plugs, light switches and locks, using Control-D2D, our unique device-to-device pairing feature.

Control-D2D works directly with the controlled device, without internet and without the app. This can be convenient for use at locations where there is no YoLink wireless network (no hub nearby), such as for use in a boat or RV or at a remote location. Each button can be paired with up to 128 devices! For instructions on using the Control-D2D feature with your FlexFob, refer to page 32.

As opposed to Control-D2D pairing, the FlexFob can control one or more devices via settings in the app. Using the app gives you additional options, such as adding a delay between actions.

Your FlexFob can also activate a scene. A scene is a type of automation that starts on your (manual) command. Where most automations are triggered (started) by something happening, like a door opening or time of day, a scene is typically is triggered by you pressing a button on the app or on a fob (or via voice command to Alexa or Google assistants, etc.). Instructions for using the FlexFob to control a scene, refer to page 20, after familiarizing yourself with the following section, FlexFob App Settings.



What Can I Do With My FlexFob, Continued


Your FlexFob can enable or disable an Alarm Strategy. It can also modify an Alarm Strategy. An example of modifying an alarm strategy would be to temporarily disable SMS notifications on an active strategy. An example of enabling a strategy is to enable the Away strategy, which arms your security devices. Instructions for using the FlexFob with Alarm Strategies, refer to page 24, after familiarizing yourself with the following section, FlexFob App Settings.

Your FlexFob can send a manual notification. For example, pressing a button can send a specific message via SMS, and it can play a message over your SpeakerHubs. Instructions for using the FlexFob to send a notification, refer to page 25, after familiarizing yourself with the following section, FlexFob App Settings.



App Functions: Device Screen

In the app, tap on your FlexFob's icon. Your fob's main screen should be similar to the one shown below.

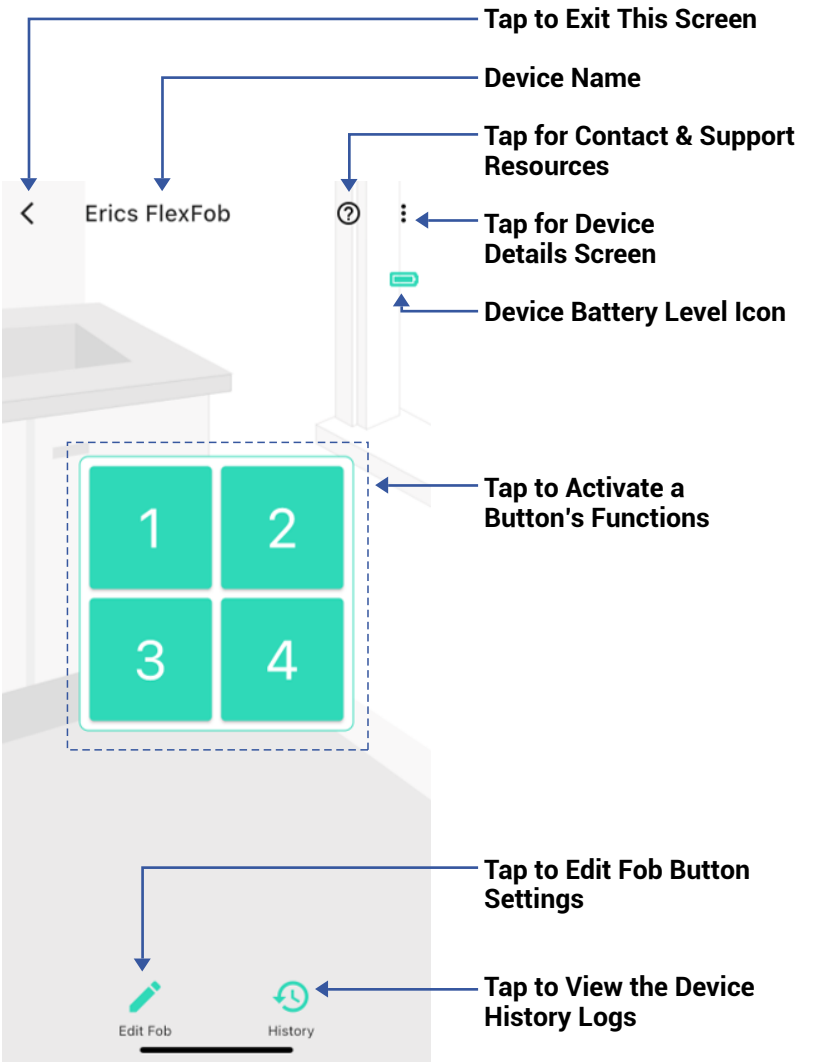



App Functions: Device Details Screen

Tap the three dots (in the upper right corner) to open the fobs **Details** screen. Your fob's screen should be similar to the one shown below.

Details ⓘ

Type YoLink Fob

Name YoLink Fob >

Room 3604 >

Favorite Will show in favorite screen ⓘ

Beep ⓘ

History Get device logs >

Other

Model YS3604-UC

Device EUI d88b4c010004dd51

SN A4522EE3CC ⓘ

Temperature 81 °F

Signal Intensity Strong (-33 dBm)

Firmware 0410

Delete

Device Type

Device Name
(Tap to Edit)

Room
(Tap to Edit)

Favorite
(Red if Favorite, Tap to Edit) ⓘ

Beep
(Tap to Enable/Disable the Beep) ⓘ

History
(Tap to View Activity Logs) ⓘ

Model Number

Device Equipment Unique Identifier Number

Device Serial Number
(Unique)

Device Temperature
(Diagnostic Use Only)


Signal Intensity
(From YoLink Hub)

Firmware Revision
(Refer to page 37)



App Functions: Program Buttons


To edit the functions of the four programmable buttons, tap the Edit button. The button edit screen will be displayed as shown:

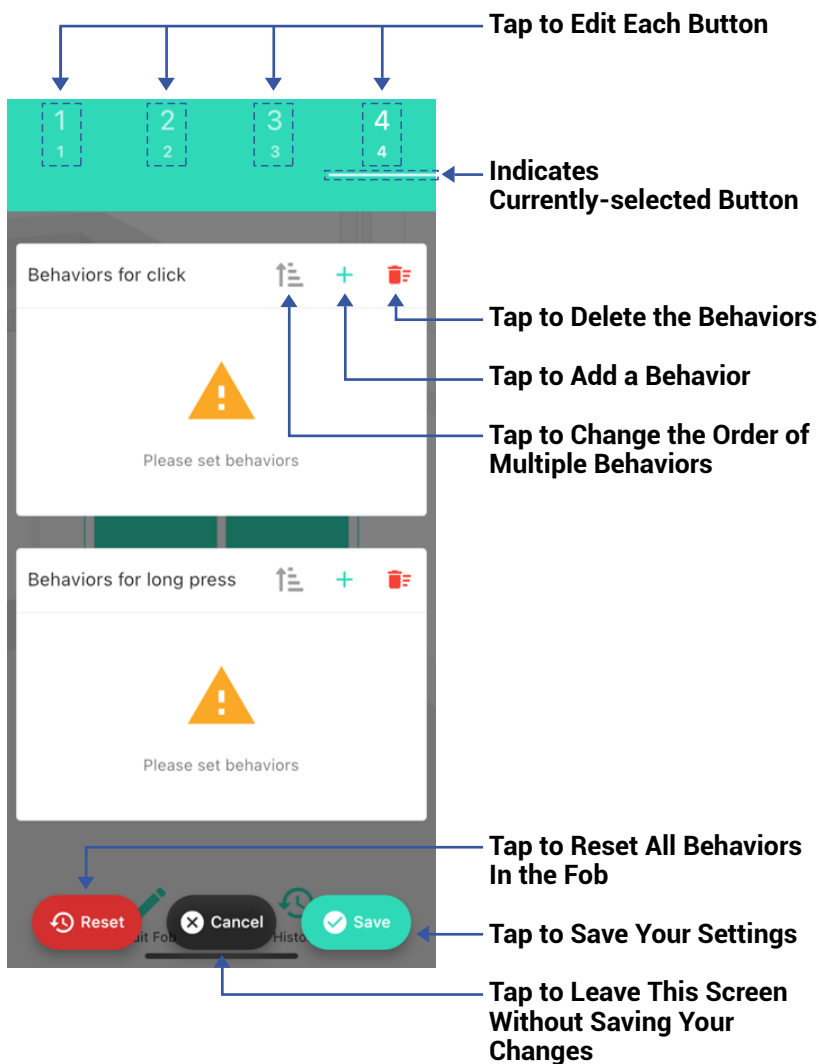



App Functions: Program Buttons-Behaviors

After tapping the + button to add a behavior, the **Choose a behavior** screen will be displayed.

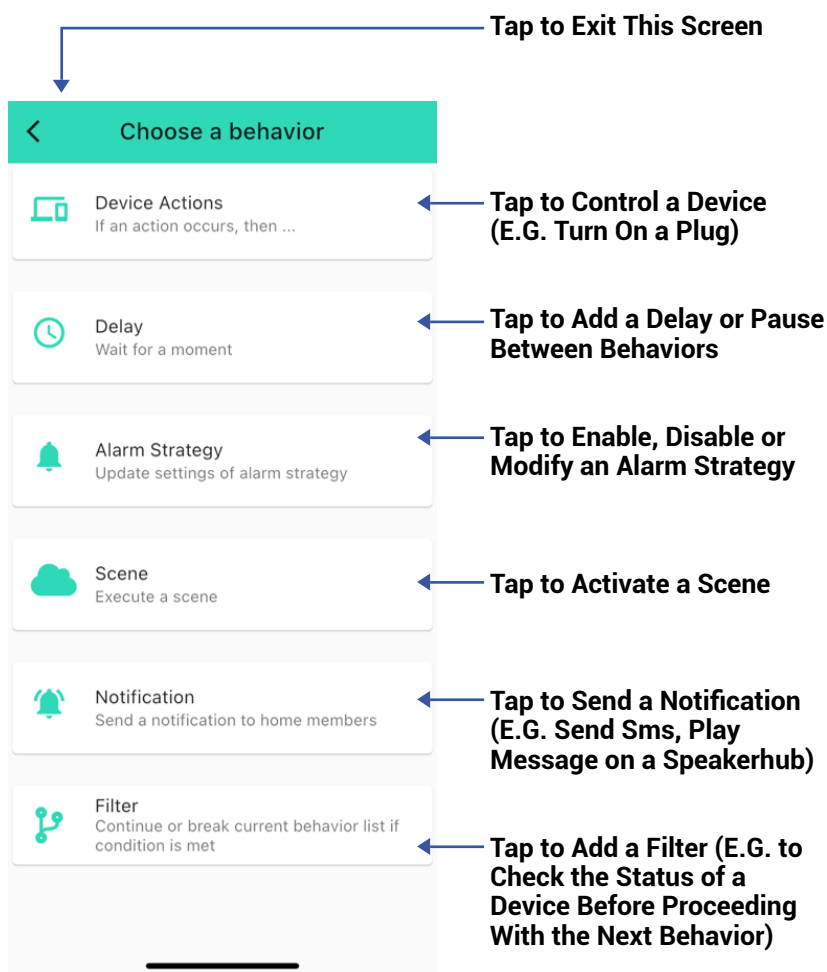

Refer to the subsequent sections for detailed instructions on using these behaviors.



App Functions: Device Control

To control one or more YoLink devices, you have several options, including controlling one or more devices by assigning them to one of the buttons via app settings, by activating a scene (that might include taking an action on one or more devices), and by using Control-D2D pairing. This section covers the first method – controlling one or more devices by assigning them to a button via app settings.

The devices you wish to control must have already been bound (added to) your app account. Decide on a button to assign to controlling the device or devices. You can also decide to use one button to turn the device(s) on, and another button to turn them off, or you can use the click (short-press) action to turn them on and the long-press action to turn them off (or vice versa). The steps are very similar. ☒

1. In the app, after deciding on the button to use for the on or off action, open the fob's main screen.
2. Tap **Edit Fob**. The fob button programming screen is displayed
3. Select the appropriate button by tapping 1, 2, 3 or 4 (on the top of the screen). The selected button will have the number underlined.




App Functions: Device Control, Continued

4. To use the click/short-press function of the button, tap the + button in that section. Otherwise, tap the + button in the long press section.
5. Tap **Device Actions**. The Choose and Set screen opens.
6. Find and select your first device by tapping on it. Depending on the device type, you will be presented with options such as Lock or Unlock, Turn ON or Turn OFF. Tap the selection that is appropriate for you.
7. Tap the check mark (upper right corner) to confirm your selection.
8. Add additional devices and select their operation as needed. When finished, from the Choose and Set screen, tap the check mark (in the upper right corner).



App Functions: Device Control, Continued

9. You are returned to the fob's button settings screen. Review your new device action(s) here.

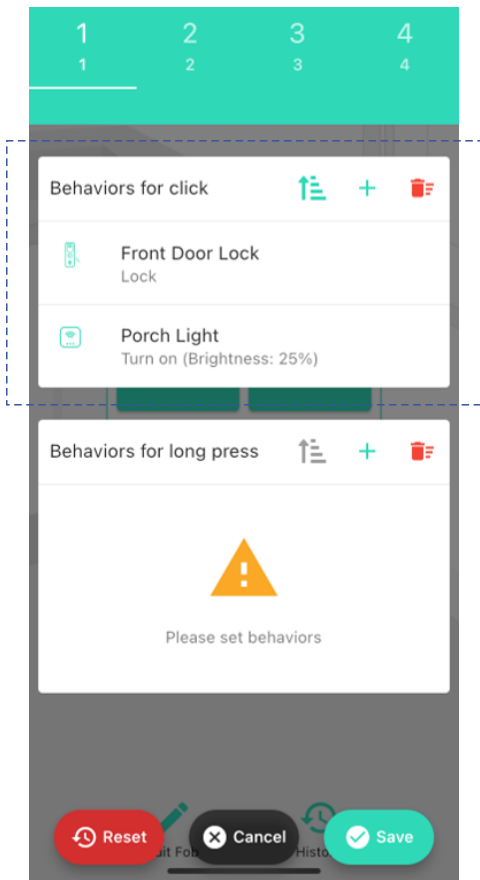

Swipe left on a behavior to delete it. Or tap the delete (trashcan) button to delete all behaviors for that click or long-press behavior. You can use the sort button to edit the order of the behaviors.



App Functions: Device Control, Continued

10. If you are happy with the settings, you can assign an action to the other button behavior, and repeat the steps to assign devices to and actions to this button. Otherwise, tap the **Save** button.



It's always a good idea to test any new settings, so they work properly for you when needed!



App Functions: Scenes

Before you can assign a scene to a button, you must first have created the scene. Here are some simplified instructions for creating a scene:

- 1.** In the app, from the Favorite or Rooms screen, tap the Smart button (on the bottom bar of the app).
- 2.** The Smart screen is displayed. This screen has two parts or tabs, the Scene tab, on the left, and the Automation tab (on the right). The selected or active tab is underlined. If it is not already, tap Scene (near the top).
- 3.** Tap the + button (upper right corner) to create a new scene.
- 4.** Tap the Name region and follow the instructions to name your new scene.
- 5.** You can assign an icon to the scene by tapping in the Icon region.
- 6.** Mark this scene as a favorite by tapping on the favorite (heart) button.
- 7.** You can leave the Group setting as-is, for now.



App Functions: Scenes, Continued

8. To add behaviors to your new scene, tap the green + button.

- Tap Device Actions to control one or more devices.
- Tap Delay to add a pause between behaviors.
- Tap Alarm Strategy to enable or disable or modify a strategy.
- Tap Notification to send a notification to you or an account member, and/or to play a message over one or more SpeakerHubs.
- Tap Filter to add a step that can abort or continue the next behavior based on the status of a scene or of a device. For example abort this scene (to switch the thermostat mode to Cool) if a window is open.



App Functions: Scenes, Continued

9. Tap the check mark to save each action, then review your scene.

< Scene ✓

Name Turn on AC >

Icon ↺ >

Favorite ❤️

Group HomeScene >

Behavior ⌵ + 🗑️

- ↓ Continue if condition is met
IF: Sliding Glass Door is Closed
- 🌡️ Thermostat
Turn to 'Cool' mode

10. If the scene settings are complete and correct, tap the check mark to save them, then tap the left arrow to exit this screen. (Refer to the previous section for tips on editing the behaviors)

Your new scene is now shown. You can tap on the edit button (pencil) to edit it, or you can tap on the run/play button to activate it.



App Functions: Scenes, Continued



Recently activated scenes are identified by dark green and square (instead of round) icons. This lets you know which scene is active (such as your “Armed” scene) or if it was a temporary/momentary scene, this indicates the most recently activated scene.

To assign a scene to a FlexFob button, follow these steps:

1. Open the fob’s main screen. Tap the **Edit Fob** button.
2. Select the button for this scene, and tap the + button on the appropriate button behavior (click/short-press or long-press)
3. Select the **Scene** option. Select your scene, then tap **Execute Scene**.
4. Tap **Confirm** to approve your selection.
5. Review your settings. Tap the **Save** button to save, or **Cancel** to exit without saving (or you can tap the **Delete** button, or left swipe on the behavior to delete it).

As noted previously, it’s always a good idea to test any changes you’ve made to devices or to the app.



App Functions: Alarm Strategies

You can use your FlexFob to enable or disable or edit an Alarm Strategy. (It is not in the scope of this user guide to cover Alarm Strategy creation and settings. Please refer to product and app support resources to familiarize yourself with Alarm Strategy settings.)

1. Open the fob's main screen. Tap the **Edit Fob** button.
2. Select the button for this strategy action, and tap the + button on the appropriate button behavior (click/short-press or long-press)
3. Select the **Alarm Strategy** option. Select your strategy, then tap either **Enable Alarm**, **Disable Alarm** or **Advanced Settings**.
4. Tap **Confirm** to approve your selection.
5. Review your settings. Tap the Save button to **save**, or **Cancel** to exit without saving (or you can tap the **Delete** button, or left swipe on the behavior to delete it).

0 App Functions: Notifications

You can actually send yourself or other account members a notification (such as a phone push notification, SMS or email). But you can also, if you have a SpeakerHub, have it play an attention-getting tone, followed by it playing your message via text-to-speech. An example of is a caregiver can be notified if assistance is needed getting out of bed.

In this example, we will create a garage door status checker, that will play a message, only if the door is closed. This will demonstrate the Filter behavior – a behavior that can check the status of a device or scene, before it proceeds to the next behavior.

1. Open the fob's main screen. Tap the **Edit Fob** button.
2. Select the button for this action, and tap the + button on the appropriate button behavior (click/short-press or long-press)
3. Select the **Filter** option. **Tap Set Condition.**
4. Tap **Check Device**. Tap **Continue**.
5. Select your Garage Door Sensor. Tap **Closed**.




App Functions: Notifications, Continued

6. Tap **Continue if condition is met**. This means the automation will proceed to the next step only if the garage door is closed. If you selected **Break if condition is met**, the automation would abort (stop, doing nothing further) if the garage door is closed.
7. Tap **Confirm**.
8. Tap the + button again to add another behavior to this button.
9. Select **Notification**.
10. There are two settings here. The **Alarm Strategies** setting determines how this notification will be sent out. The selected strategy is identified in green text. If this strategy is not correct, tap the strategy name and select a new strategy in the dialogue box that appears. Then tap **Confirm**.
11. To define the text of the notification, tap the Notification Content box and type in your message.



App Functions: Notifications, Continued

12. Tap **Save**.

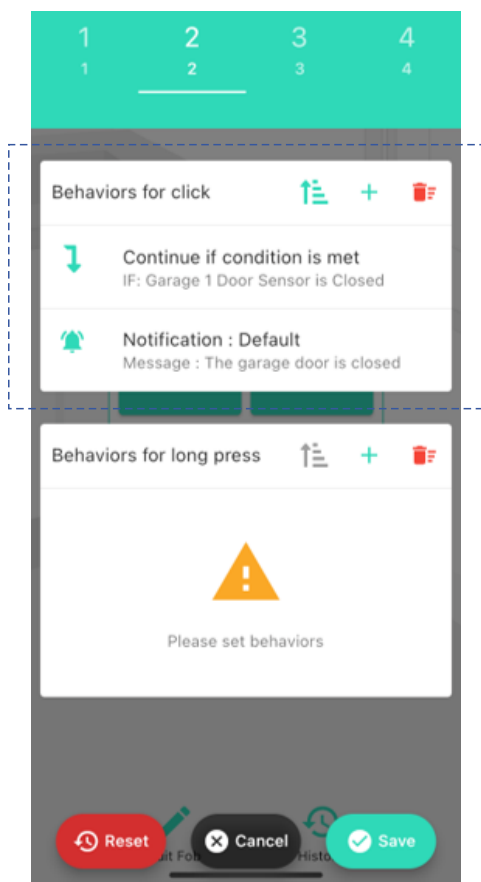

13. Review your settings. Tap the **Save** button to save, or **Cancel** to exit without saving (or you can tap the **Delete** button, or left swipe on the behavior to delete it).

When you press this button, if the garage door is closed, you will receive notifications (push, SMS, email) with the message “The garage door is closed” and if you have a SpeakerHub, this message can be read out to you.



3rd Party Services: Alexa

You can use the FlexFob to trigger Alexa routines. You must have the Alexa app installed, the YoLink skill installed and connected to your YoLink app account.

Alexa regards the FlexFob's four buttons as motion sensors. Only the short-press/click button behavior is recognized by Alexa (you can still use the long-press behavior for other things as Alexa ignores it) and in fact, you can still assign a YoLink app function to this button (although you are probably unlikely to need to do this). It is not in the scope of this user guide to cover set up of the Alexa skill or to cover creating an Alexa routine, so the following simplified instructions are provided:

1. Create a new routine in the Alexa app.
2. In the **When This Happens** section, select **Smart Home**.
3. Find your FlexFob. Each button is identified with an “_1, _2, _3, _4” appended to your FlexFob's name. Select the button that you'd like to assign to this routine.
4. Tap the **Detected** button. Disregard the other settings available.
5. Tap **Next**.



3rd Party Services: Alexa, Continued

6. Add whatever action(s) you require for your routine, such as turning on a non-YoLink device.
7. Review your routine settings. If they are correct, tap **Save**.

New settings in the Alexa app can take several minutes to take effect, but test your new routine by short-pressing on the appropriate FlexFob button.



3rd Party Services: IFTTT

You can use the FlexFob to trigger IFTTT applets. You must have the IFTTT app installed, the YoLink service installed and connected to your YoLink app account.



Please note, IFTTT.com is a paid service, typically offering 5 free applets.

1. Create a new applet in the IFTTT app.
2. For the If This section, search and select the YoLink service.
3. Tap Flex Fob.
4. In the Device drop-down box, select your FlexFob, tap Done.
5. In the Button drop-down box, select the button. Tap Done.
6. In the Action drop-down box, select either Press or Long Press. Tap Done.
7. Tap Create Trigger to define the applet actions to be assigned to this button.
8. Tap Continue to save your settings.



3rd Party Services: IFTTT, Continued

9. Review your applet settings, if they are correct tap Finish.

Test your new applet by short- or long-pressing on the appropriate FlexFob button.



3rd Party Services: Home Assistant

Refer to the Home Assistant website and the YoLink integration page for instructions.

<https://www.home-assistant.io/integrations/yolink/>

Programmers and developers are encouraged to join us on Discord. Sign up here:

<https://shop.yosmart.com/pages/get-connected>

S Control-D2D


As noted previously, you can use Control-D2D pairing to pair a FlexFob button to one or more (up to 128!) compatible YoLink devices. Once paired, you will be able to control the device without the need of an internet connection or a hub.

Each Control-D2D pairing consists of one device that initiates the action, referred to as the “controller”. The device(s) that are controlled are called the “responder”. The FlexFob can only be a controller.


In this example, instructions are given to pair your FlexFob to a YoLink Garage Door Controller.

1. On the FlexFob, select a button. Press and hold this button for 5 to 10 seconds, until the LED flashes green, then release the button.

Press for 5-10 Seconds

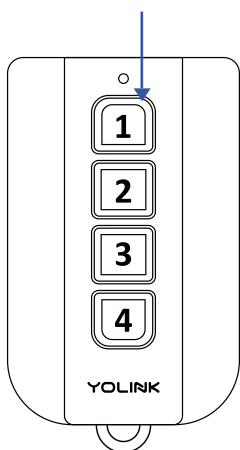


Until the LED Flashes Green

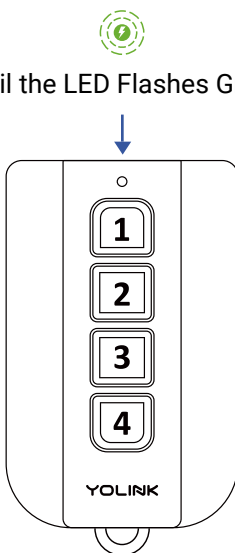

S Control-D2D, Continued

2. On the Garage Door Controller, press and hold the SET button for 5 to 10 seconds, until the status LED flashes green

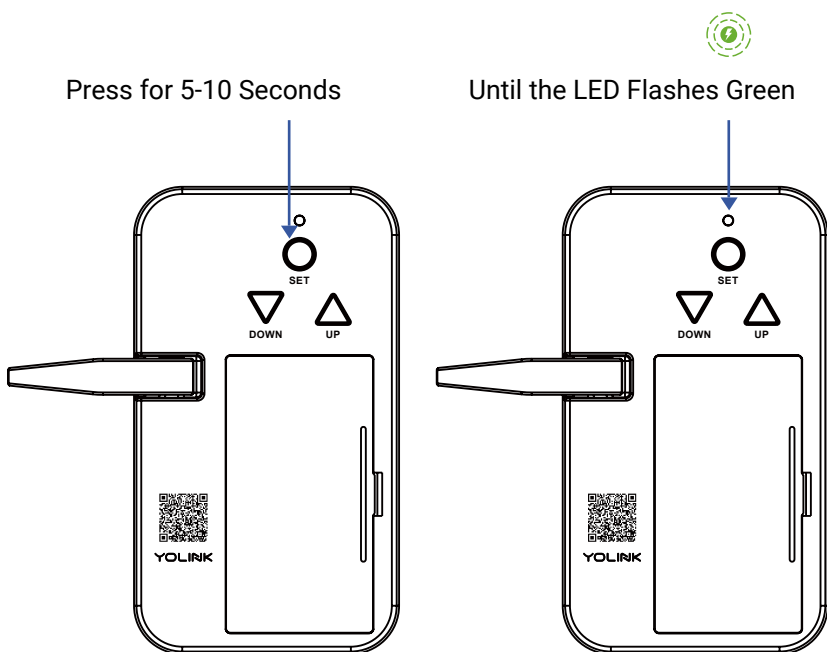

Your FlexFob is now paired to your Garage Door Controller. Pressing the FlexFob's paired button will now operate the garage door.

The process of pairing other YoLink devices is similar. Please refer to the device's documentation for specific instructions.



Control-D2D, Continued


Unpair your FlexFob:

- 1.** On the FlexFob, press the assigned button for 10 to 15 seconds, until the LED flashes green, then red, then release the button.
- 2.** On the Garage Door Controller, press and hold the SET button for 10 to 15 seconds, until the status LED flashes green, then red.

The Garage Door Controller should no longer respond to the FlexFob. Test the fob and perform the unpairing steps again, if needed.

T Battery Replacement

- 1 Using a small Phillips screwdriver, remove the housing screw. Carefully place it to the side.

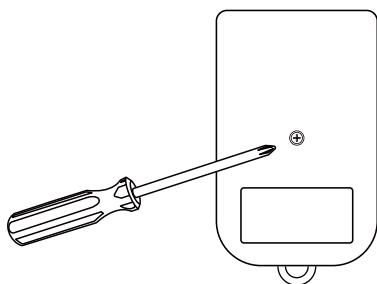


- 2 Remove the back shell.




You may find it easier to pry open the case using a fingernail, or a slotted screwdriver. Start at the bottom of the fob, at the keyring loop. Once part of the case begins to separate, move your fingernail or screwdriver gently around the edges of the case, until the back cover comes free.

T Battery Replacement, Continued


- 3 Remove the old batteries.

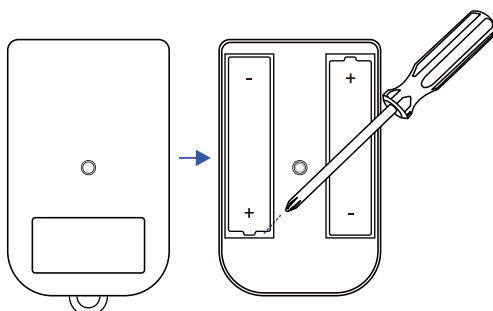

- 4 Install two new alkaline AAA batteries.
(Do not mix old and new batteries)

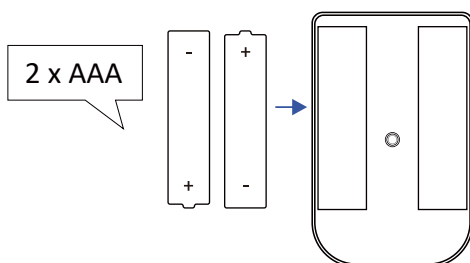

- 5 Reassemble the fob and tighten the screw.

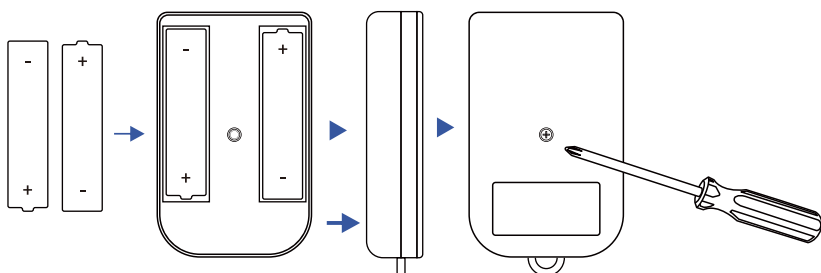


- 6 Test the operation of your fob.



Firmware Updates

Your YoLink products are frequently being improved, with new features and functions added over time. It is periodically necessary to make changes to your fob's firmware. For optimal performance of your fob, and to give you access to any improvements made to your fob's model, these firmware updates should be installed (added to your fob) when they become available.

In the Detail screen of your fob, you will see the Firmware section, as shown in the image below. A firmware update is available if it says "#### ready now" (where #### is a four-digit combination of letters and/or numbers).

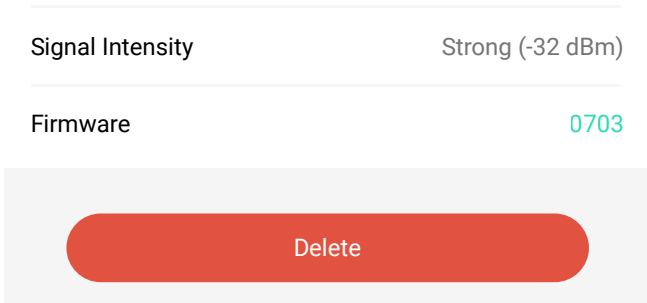

Tap in the Firmware area to start the update. The fob will update automatically, indicating the progress by percentage-complete. You may use your fob during the update process, as the update is performed "in the background". You may see the LED slowly blink green during the update, and the update may continue for several minutes beyond the LED turning off.



Firmware Updates, Continued




Firmware is like settings in your fob that define the overall operations of the fob, for example, determining when and how the fob's sounder should beep. These settings are added to the fob when it is manufactured, and they are periodically updated, as needed, to add improvements, new features, new integrations, etc, to your fob, as they become available. If you use your FlexFob without an associated YoLink hub, firmware updates can not be made on your fob.

V Factory Reset

When directed by customer support, and/or as an attempt to resolve a problem with your fob, it may be necessary to perform a factory reset. Factory resetting your fob returns it to the factory default programming and settings. This is a simple process:

- Hold the #4 button for 20 to 30 seconds, until the LED blinks red and green alternately, then release the button.

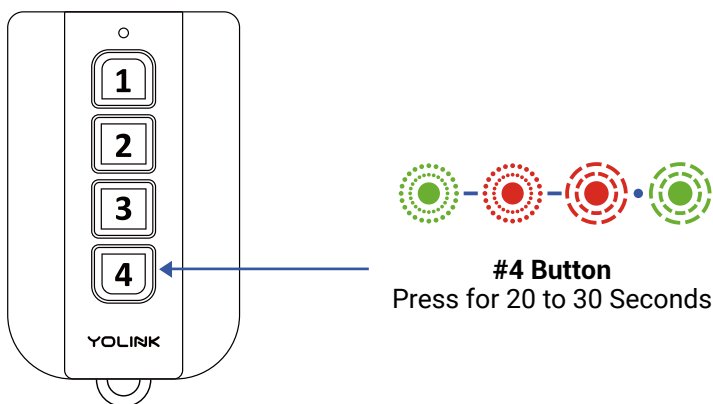

Factory reset is complete when the LED stops flashing.



Pressing the button for longer than 30 seconds will abort the factory reset process.

Factory reset will not remove the fob from the app. The only way to remove the fob from the app is to delete it (in the app).




Specifications


Battery:	3V DC (two AAA batteries)
Device Current Draw:	$\leq 135\text{mA}$ (on), $\leq 5\mu\text{A}$ (standby)
Dimensions, Imperial (L x W x D):	2.67 x 1.69 x 0.61 inches
Dimensions, Metric (L x W x D):	68 x 43 x 15.5 mm
Environment:	Working Temperature: -4°F-122°F (-20°C-50°C) Working Humidity: $\leq 95\%$, non-condensing




Specifications, Continued

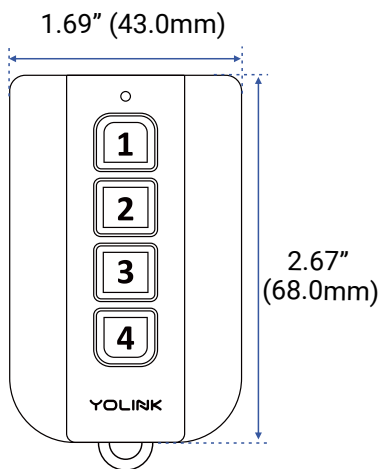

FRONT

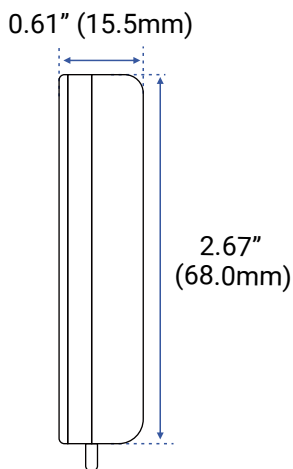

SIDE

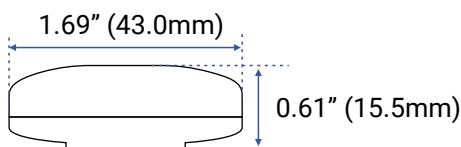

TOP

Troubleshooting

If your fob does not operate as expected, if the fob has worked before, but stopped working, check and replace the batteries, if needed. If the fob has not worked before, perform the pairing process as previously explained, then test the fob again.

If this does not resolve the issue, please contact our customer support department (see the contact info on the last page of this guide).

We recommend checking for and performing any available firmware updates before contacting customer support.

Warnings

For optimal performance and lifetime of your fob, please adhere to the following warnings:

The FlexFob is water-resistant but not waterproof. Do not allow your fob to get wet or be submerged in water or other liquids. Promptly dry off your fob if it does get wet.

- The FlexFob is intended generally for use in indoor environments or safe from the elements. Do not leave your fob outside and/or where it may be exposed to extreme hot or cold environments. The battery life can be adversely impacted by extreme hot or cold environments. The fob can be harmed by ice, water, or condensing moisture.
- When replacing the batteries, only use new alkaline or lithium non-rechargeable batteries.
- Do not use zinc blend batteries.
- Do not mix old and new batteries.
- Adhere to the battery manufacturer's safety and disposal or recycling instructions.
- If storing your fob unused for extended periods, remove the batteries.
- Please contact Customer Support before attempting to repair, disassemble, or modify your fob, any of which can permanently damage your fob and void the warranty.

2 Year Limited Electrical Warranty

YoSmart Inc. warrants to the original user (“customer”) of this product that it will be free from defects in materials and workmanship, under normal use, for 2 years from the date of purchase. This warranty does not apply to devices that have been improperly installed, modified, put to a use other than designed, or subjected to acts of God (such as floods, lightning, earthquakes, etc.). This warranty does not cover neglected or abused products. This warranty is limited to the repair or replacement of the device, only, at YoSmart's sole discretion. YoSmart will NOT be liable for the cost of installing, removing, nor reinstalling this product, nor direct, indirect, or consequential damages to persons or property resulting from the use of this product. This warranty only covers the cost of replacement parts or replacement units, it does not cover shipping & handling fees. The customer must provide proof of purchase, in the form of the original purchase invoice or order number. The purchase must have been made from an authorized seller.

To implement this warranty please contact us by one of the methods listed on the Contact Us page of this user guide.



FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.



FCC Statement, Continued

- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

PRODUCT NAME:
FLEXFOB

PARTY:
YOSMART, INC.

TELEPHONE:
831-292-4831

MODEL NUMBER:
YS3604-UC

ADDRESS:
25172 ARCTIC OCEAN DRIVE, SUITE 106
LAKE FOREST, CA 92630 USA

EMAIL:
SERVICE@YOSMART.COM



Contact Us

We are here for you, if you ever need any assistance installing, setting up or using a YoLink app or product!

Need help? For fastest service, please email us 24/7 at service@yosmart.com

Or call us at **831-292-4831** (US phone support hours: **Monday - Friday, 9AM to 5PM** Pacific)

You can also find additional support and ways to contact us at:

www.yosmart.com/support-and-service

Or scan the QR code:



Support Home Page

Finally, if you have any feedback or suggestions for us, please email us at feedback@yosmart.com

Thank you for trusting YoLink!

YoLink Customer Support

YOLINK

25172 Arctic Ocean Drive, Suite 106 Lake Forest, CA 92630
© 2026 YOSMART INC. CALIFORNIA, USA