




Garage Door Sensor

YS7706-UC

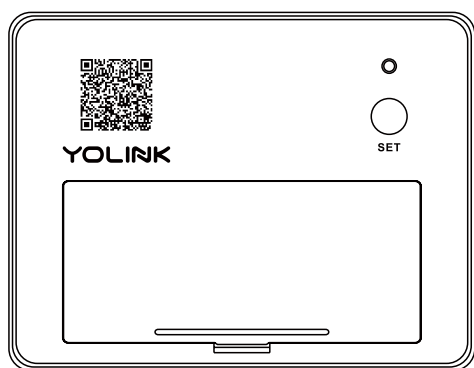

Installation & User Guide

Revision Jun. 11, 2026

Contents

A . Welcome!	01
B . Before You Begin	02
C . In the Box	03
D . Required Items	04
E . Get to Know Your Garage Door Sensor	05

F . Install the App	06
G . Add Your Garage Door Sensor to the App .	07
H Power Up	09
I . Installation	10
J . App Functions: Device Screen	15

K . App Functions: Device Details Screen	16
L . App Functions: Alarm Strategy Screen	18
M . App Functions: Smart – Automation	20
N . Control-D2D	21
O . App & 3rd-Party Services	24

P . Battery Replacement	25
Q . Factory Reset	27
R . Firmware Update	28
S . Specifications	29
T . Troubleshooting	31

U . Warnings	33
V . Warranty	35
W . FCC Statement	36
X . Contact Us	38

A Welcome

Thank you for purchasing YoLink products! We appreciate you trusting YoLink for your smart home & automation needs. Your 100% satisfaction is our goal. If you experience any problems with your installation, with our products or if you have any questions that this manual does not answer, please contact us right away. See the Contact Us section for more info.

Thank you!

YoLink Customer Support

User Guide Conventions

The following icons are used in this guide to convey specific types of information:



Very important information
(can save you time!)



Good to know info but may not
apply to you

B Before You Begin

Visit our Garage Door Sensor support page on our website, for the latest installation guides, additional resources, information and videos by visiting:

<https://www.yosmart.com/support/YS7706-UC>

Or by scanning the QR code:



Download the most current version of the user guide by scanning the QR code:




B Before You Begin, Continued




Your Garage Door Sensor connects to the internet via a YoLink hub, and it does not connect directly to your WiFi or local network. In order for remote access to the device from the app, and for full functionality, a hub is required. This guide assumes the YoLink app has been installed on your smartphone, and a YoLink hub is installed and online (or your location, apartment, condo, etcetera, is already served by a YoLink wireless network).


C In the Box

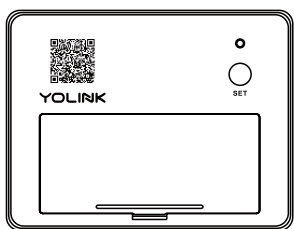

Garage Door Sensor




Quick Start Guide




2 x AAA Batteries (Pre-installed)

D Required Items


Items You May Need:




Medium Phillips Screwdriver

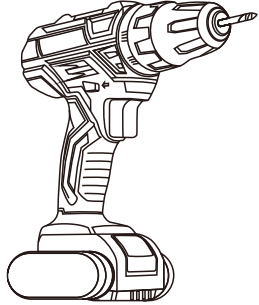

Drill & Drill Bits

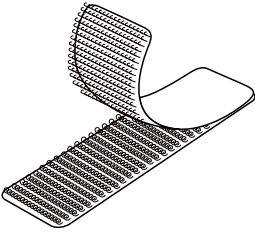


Velcro Strips



Phillips Screws (2)
Plastic Anchors(2)

E


Get to Know Your Garage Door Sensor, Continued

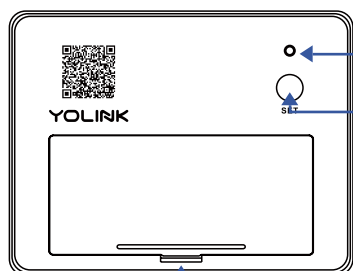

Status LED

SET Button

Battery Compartment Cover

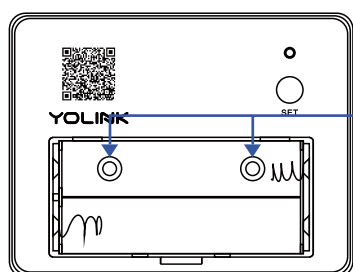

Wall-Mounting Holes
(Inside Battery Compartment)

LED Behaviors



Blinking Red Once, then Green Once
Device Power-Up



Blinking Red And Green Alternately
Restoring to Factory Default Settings



Blinking Green
Connecting to Cloud



Slow Blinking Green
Updating



Fast Blinking Green
Control-D2D Pairing in Progress



Blinking Red Once
Device Alerts or Device is Connected to the Cloud and is Functioning Normally



Fast Blinking Red
Control-D2D Unpairing in Progress



Fast Blinking Red Every 30 Seconds or Fast Blinking Red 5 Times when pressing the SET Button
Batteries are Low, Please Replace the Batteries



Install the App

If you are new to YoLink, please install the app on your phone or tablet, if you have not already. Otherwise, please proceed to the next section.

Scan the appropriate QR code below or find the “YoLink app” on the appropriate app store.



Apple phone/tablet
iOS 9.0 or higher



Android phone/tablet
6.0 or higher

Open the app and tap **Sign up for an account**. You will be required to provide a username and a password. Follow the instructions, to set up a new account. Allow notifications, when prompted.

You will immediately receive a welcome email from no-reply@yosmart.com with some helpful information. Please mark the yosmart.com domain as safe, to ensure you receive important messages in the future.


Log in to the app using your new username and password.

The app opens to the **Favorite** screen. This is where your favorite devices and scenes will be shown. You can organize your devices by room, in the **Rooms** screen, later.




Add Your Garage Door Sensor to the App

1. Tap **Add Device** (if shown) or tap the scanner icon:

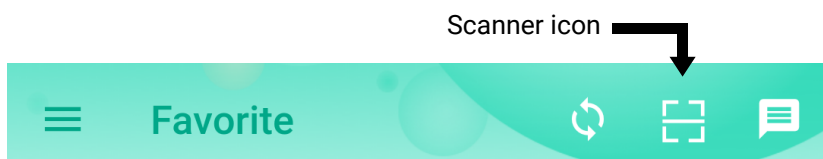

2. Approve access to your phone's camera, if requested. A viewfinder will be shown on the app.

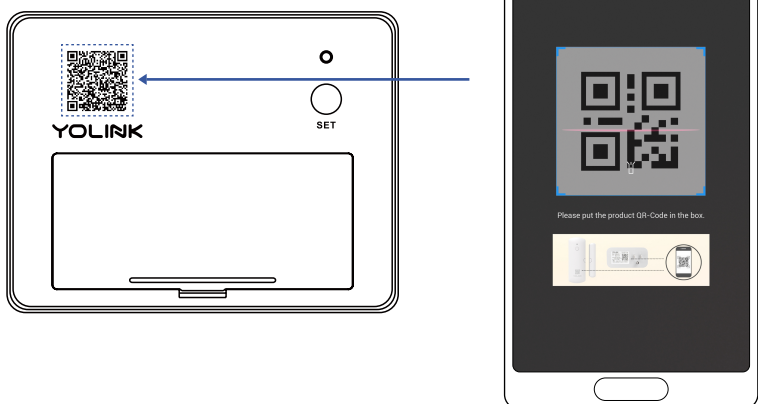


3. Hold the phone over the QR code so that the code appears in the viewfinder. If successful, the **Add Device** screen will be displayed.



Add Your Garage Door Sensor to the App, Continued

4. You can change the device name and assign it to a room later. Tap **Bind device**.


5. If successful, the screen will appear as shown. Tap **Done**.

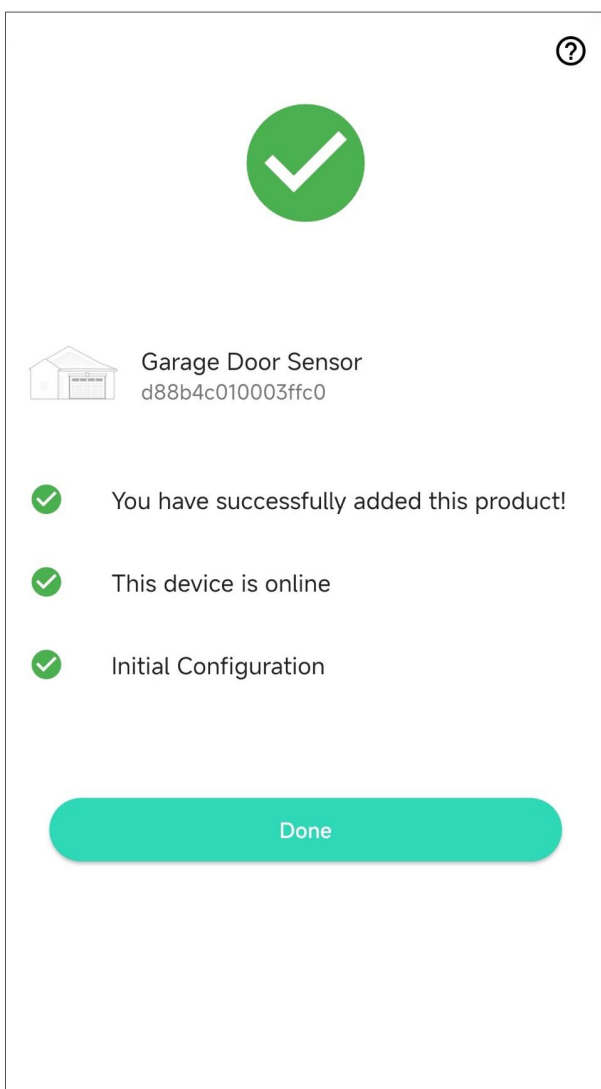



Power Up

Power up the Garage Door Sensor by briefly pressing the SET button, until the LED flashes red then green.

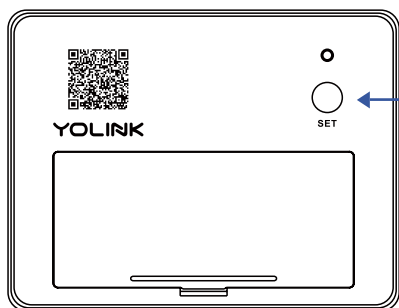

SET Button



Installation

Application and location considerations:

Please note, the Garage Door Sensor is intended for indoor applications, only. Refer to the environmental specifications on the product support page. The performance of the device and the life of the batteries may be effected by the incorrect application of this product, and the warranty does not cover water damage.

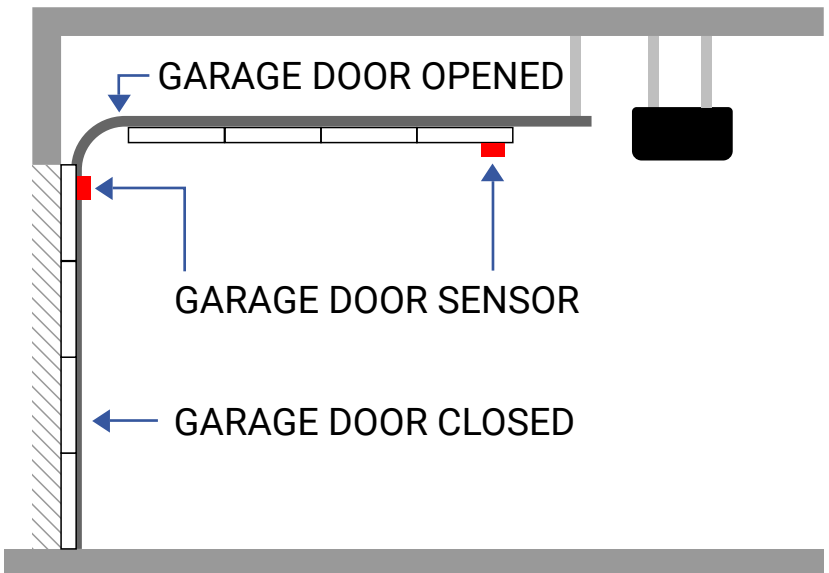


Figure 1



Installation, Continued

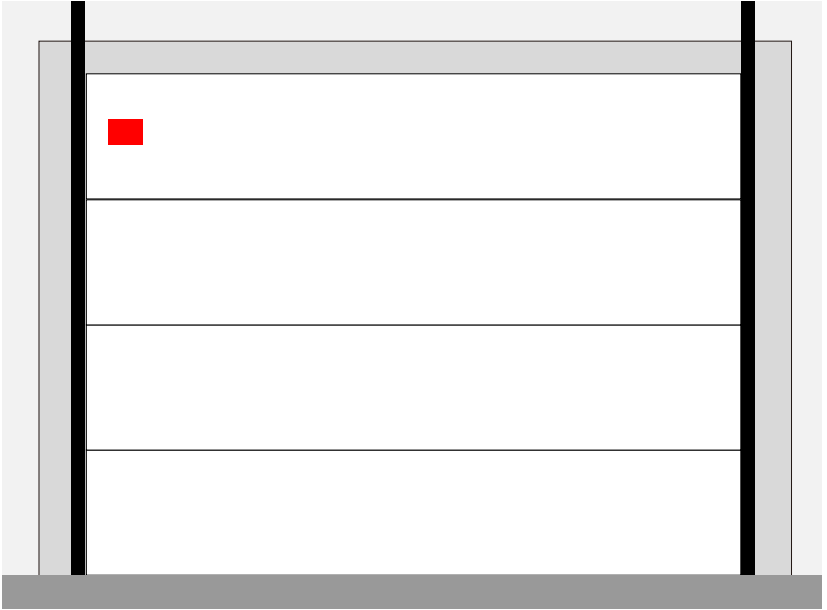


Figure 2

How the Garage Door Sensor works:

The Garage Door Sensor has an accelerometer sensor that detects device angle or orientation. It's quite simple: as shown in Figure 1, if the sensor is in the normal, vertical position, the door is determined to be closed, but if the sensor has been turned on its side, the door is determined to be open. The sensor will need to be installed on the topmost section of the door, as shown in Figure 2. The topmost section is the first to be tilted away from the door opening as the door is lifted open by the operator/opener mechanism. Placing the sensor on lower sections will delay the response to the door being opened.




Installation, Continued

How the Garage Door Sensor is installed:

The Garage Door Sensor is shipped with 3M brand adhesive mounting tape affixed to the back of the sensor, allowing for the sensor to be quickly and easily attached to the garage door, requiring no tools. The sensor can alternatively be installed by screwing it to the garage door. The mounting tape may not work well with older, wooden, garage doors, with rough surfaces. Mounting holes can be found underneath the batteries in the sensor.

Install the sensor:

Before installing the sensor, clean the location with a degreaser or rubbing alcohol, and allow it to dry. In order for the mounting tape to properly adhere to the door, the surface must be free of moisture, dirt, oil, grease, and cleaning chemicals.

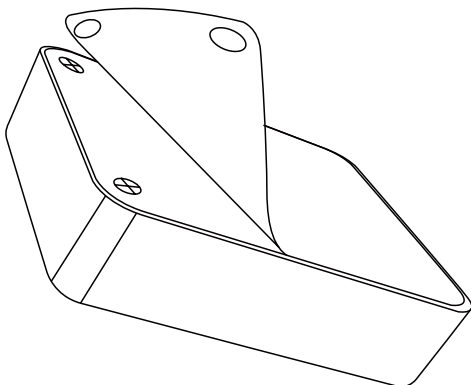



Installation, Continued

Remove the protective plastic from the mounting tape, by peeling it back from one corner. Place the sensor at the desired location, and press firmly down for at least 5 seconds. Gently tug on the sensor, to verify it is securely mounted.

Screw-Mounting Method:

1. Open the battery cover, by gently prying at the notch and remove the batteries.
2. Place the sensor at the desired location and secure it to the garage door using screws (not included), as shown in Figure 3.
3. Reinstall the batteries and replace the battery compartment cover, as shown in Figure 4.

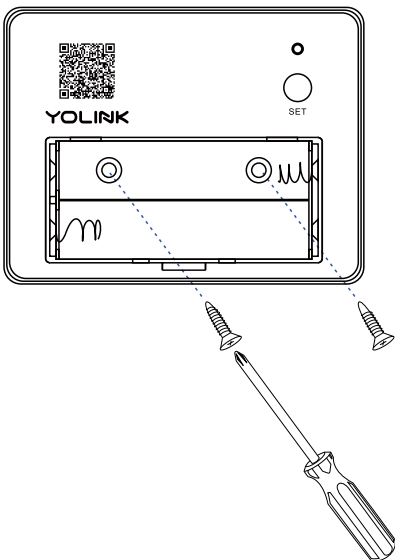


Figure 3

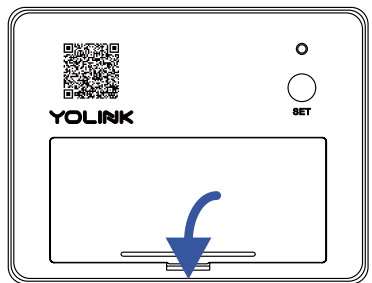


Figure 4



Installation, Continued

Test the sensor:


With the app open, check the status of the sensor, compared to the position of the door. For example, if the door is closed, this should be the indication of the sensor in the app.

Using the garage door button or a transmitter, as applicable, open or close the door. Verify the sensor responds correctly.



App Functions: Device Screen

In the app, tap on your Garage Door Sensor icon. Your Garage Door Sensor main screen should be similar to the one shown below.

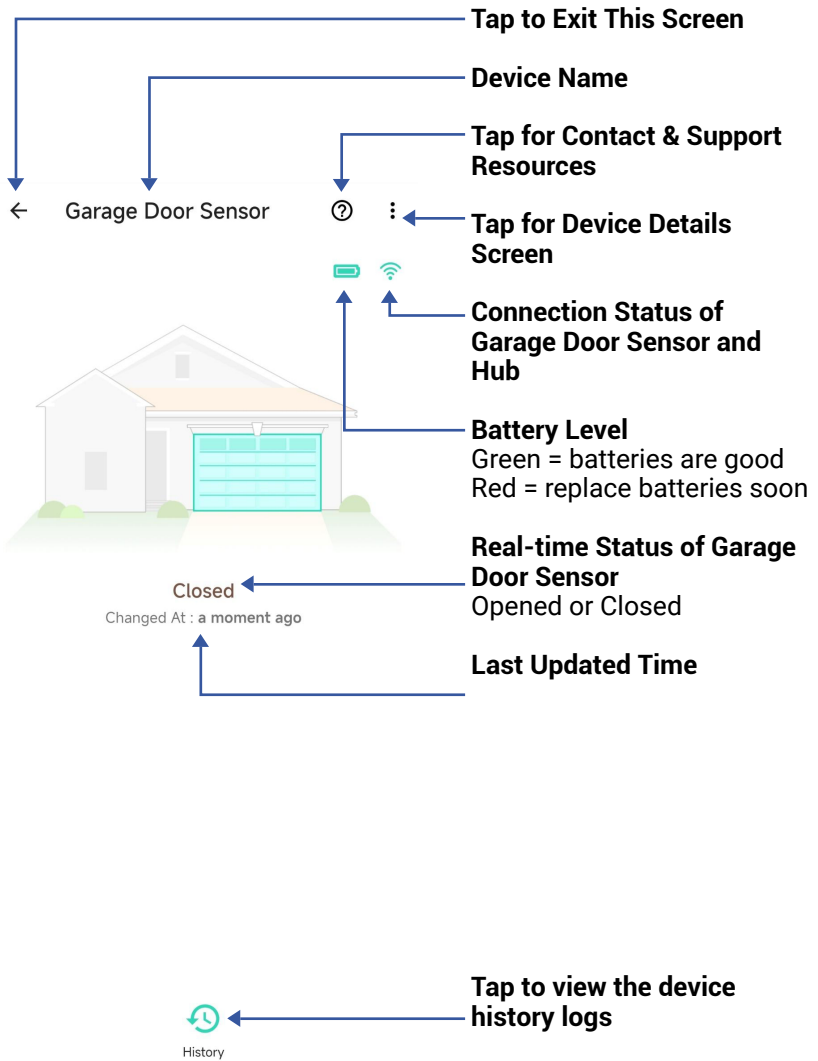



App Functions: Device Details Screen


Tap the three dots (in the upper right corner) to open the Garage Door Sensor **Details** screen. Your Garage Door Sensor's screen should be similar to the one shown below.

The screenshot shows the 'Details' screen for a 'Garage Door Sensor'. The screen has a teal header with a back arrow, the title 'Details', and a help icon. The content is organized into sections: 'Type' (Garage Door Sensor), 'Name' (Garage Door Sensor with an edit icon), 'Room' (1.27 with an edit icon), 'Favorite' (a red heart icon), 'History' (a right arrow icon), 'Alert' (Door is opened with a right arrow icon), 'Open Reminder' (10 min with a right arrow icon), 'Alarm Strategy' (Default with a right arrow icon), 'State' (Closed), and 'Device EUI' (d88b4c010003ffc0). Annotations with blue lines point to various elements: 'Device Type' points to the sensor type; 'Device Name (Tap to Edit)' points to the name field; 'Room (Tap to Edit)' points to the room number; 'Favorite (Red if Favorite, Tap to Edit)' points to the heart icon; 'Device history Tap to view device history' points to the history icon; 'Alert Settings Tap to enable or disable alerts' points to the alert status; 'Open Reminder Tap to edit open reminder and continuous alarm settings' points to the open reminder setting; 'Alarm Strategy Tap to edit the sensor's Alarm Strategy' points to the alarm strategy dropdown; and 'State' points to the state indicator.

Field	Value	Annotation
Type	Garage Door Sensor	Device Type
Name	Garage Door Sensor >	Device Name (Tap to Edit)
Room	1.27 >	Room (Tap to Edit)
Favorite	Will show in favorite screen (Red heart icon)	Favorite (Red if Favorite, Tap to Edit)
History	Get device activity logs (> icon)	Device history Tap to view device history
Alert	Door is opened >	Alert Settings Tap to enable or disable alerts
Open Reminder	Alert after left open 10 min >	Open Reminder Tap to edit open reminder and continuous alarm settings
Alarm Strategy	Default >	Alarm Strategy Tap to edit the sensor's Alarm Strategy
State	Closed	State
Device EUI	d88b4c010003ffc0	



App Functions: Device Details Screen, Continued

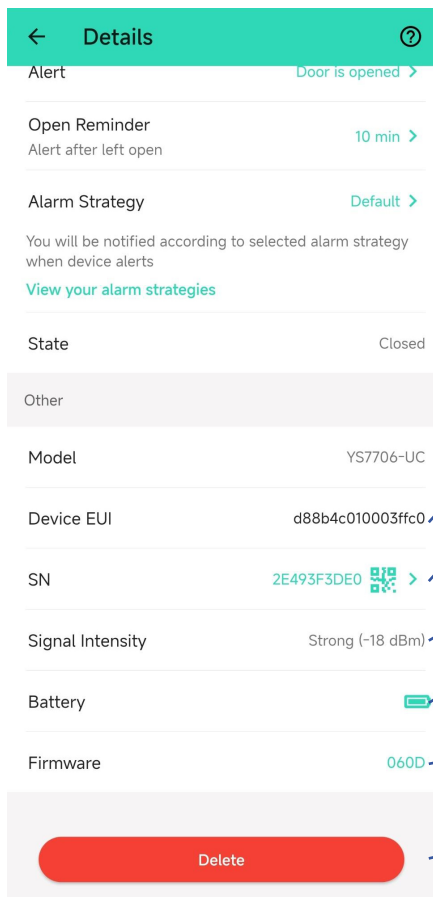

Model Number

Device EUI
Unique Identifier Number

Device Serial Number

Signal Intensity
(From YoLink Hub)

Firmware Revision
(Refer to page 28)

Remove Device from Current Account
Tap to delete the device from your YoLink account



App Functions: Alarm Strategy Screen

You can set up notifications in Alarm Strategy settings, make sure you have enabled App, Email, SMS notification from the app->Menu->Settings->Account Settings->Advanced Settings, and verified your email address and added your phone number in the app.

The screenshot shows the 'Alarm Strategy' settings screen. The header is green with a back arrow, a question mark icon, and the title 'Alarm Strategy'. Below the header, there are several sections: 'Name' with the value 'Always' and a chevron; 'Related Devices' with the value '1' and a chevron; 'Enable Device Alarm' with a toggle switch that is turned on; 'Do Not Disturb' with a toggle switch that is turned off; 'Send App Notification' with a dropdown menu set to 'Admin'; 'Send Email' with a dropdown menu set to 'None'; 'Send SMS' with a dropdown menu set to 'None'; and 'Trigger Action' with a dropdown menu set to 'None'. At the bottom is a green 'Save' button. Annotations with arrows point to the question mark icon, the 'Always' text, the '1' text, the 'Enable Device Alarm' toggle, and the 'Do Not Disturb' toggle.

Strategy Name
Tap to edit the name

Related Devices
Tap to add more devices (that can alert) to this strategy, a device can be related to only one strategy

Tap to Enable or Disable The Strategy

Tap to Set Up Dnd (Do Not Disturb)



App Functions: Alarm Strategy Screen, Continued

The screenshot shows the 'Alarm Strategy' screen with a teal header. Below the header are several settings sections. The 'Name' section has a value of 'Always' with a right arrow. The 'Related Devices' section shows '1' with a right arrow. The 'Enable Device Alarm' section has a toggle switch that is turned on. The 'Do Not Disturb' section has a toggle switch that is turned off. The 'Send App Notification' section has a dropdown menu set to 'Admin'. Below this is a link for 'Notification Settings' with a description. The 'Send Email' section has a dropdown menu set to 'None'. Below this is a description. The 'Send SMS' section has a dropdown menu set to 'None'. Below this is a description. The 'Trigger Action' section has a dropdown menu set to 'None'. Below this is a description. At the bottom is a large teal 'Save' button. Blue arrows point from text boxes on the right to the 'Send App Notification' dropdown, the 'Notification Settings' link, the 'Send Email' dropdown, the 'Send SMS' dropdown, and the 'Trigger Action' dropdown.

Send App Notification

Tap to select Admin to enable App push, select All, if desired for all members

Notification Settings (iOS only)

Tap to change notification tone, if desired

Send Email

Tap to select Admin to enable email notification, select All, if desired to send to all members

Send SMS

Tap to select Admin to enable limited text messages, select All (subscribe required-starter or standard plan), if desired to send to all members

Trigger Action

Tap to choose trigger actions (YoLink sirens, YoLink SpeakerHubs, scene)



App Functions: Smart - Automation

The Garage Door Sensor can be set up as a condition in automation.

The screenshot shows the 'Automation' settings interface. At the top, there is a green header bar with a back arrow, the title 'Automation', and a checkmark icon. Below this, the 'Name' field is set to 'garage door is still open'. The 'When' section shows a clock icon and the text 'When 23:00 Every Day'. The 'Then' section is titled 'Behavior' and contains two items: 'Continue if condition is met IF: Garage Door Sensor is Open' and 'Notification : Default Message : Garage door is open!'. At the bottom, there is a 'Working Time' section set to 'Always Working' and an 'Advanced Settings' section with a dropdown arrow. Annotations with arrows point to various elements: 'Tap to save the settings' points to the checkmark; 'Edit the name of the automation' points to the name field; 'Tap to set a condition for the automation' points to the 'When' section; 'Add behavior' points to the plus icon; 'Delete the behavior' points to the trash icon; 'Tap to sort behaviors' points to the list icon; 'Always Working' points to the 'Always Working' text; and 'Advanced Settings' points to the dropdown arrow.

Tap to save the settings

Edit the name of the automation

Tap to set a condition for the automation

Add behavior
Tap to add a behavior

Delete the behavior

Tap to sort behaviors

Always Working
Tap to set when the automation can be activated

Advanced Settings
Tap to edit advanced automation and logging settings

The Automation settings are saved in the cloud.

You can edit the Advanced Settings, including save the log, retry if action fails, notify if action fails, etc.



Control D2D

YoLink Control-D2D (device-to-device) pairing is a feature unique to YoLink products. One device can be paired to one (or more) devices. When two or more devices are paired, a link is created, “locking-in” the behavior, so that the device(s) will carry out their paired behavior when required, regardless of a connection to the internet or cloud, and even without AC power (in the case of battery-powered or battery backed-up devices). For example, a Door Sensor can be paired to a Siren Alarm, so that when the door is opened, the siren is activated.

Several important points:


- The use of Control-D2D is entirely optional. It is more common to use the app’s automation and scene settings to create desired behaviors, such as motion sensors turning on the lights automatically. Your application may require functionality during the loss of internet/WiFi, in which case Control-D2D pairing may be preferred.
- A device that controls another device is referred to as a Controller. The device that is controlled is referred to as a Responder.

N Control D2D, Continued

- While online, any paired behaviors as well as automation and scene settings (desired siren behaviors set in advance by you, such as the door sensor/siren example) will both be carried out. Paired behaviors and app settings can coexist, but use care to not create conflicting actions between the two, as the device may not operate as desired.
- A device can have up to 128 pairings.

The following instructions use pairing your Garage Door Sensor with a YoLink Plug as an example, when garage door sensor is open, then turn on plug.

1. To configure your Garage Door Sensor as a controller, open the door, press and hold the SET button for 5-10 seconds until the LED quickly blinks green, then, release the button.

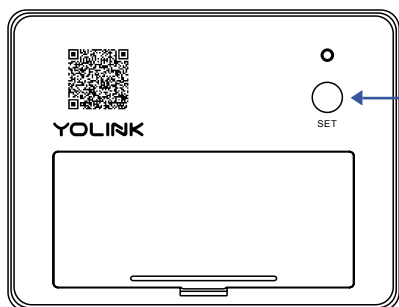


SET Button

Press for 5 to 10 Seconds

N Control D2D, Continued

2. To configure a YoLink Plug as the responder, turn on the plug, press and hold the POWER button for 5-10 seconds until the LED quickly blinks green, then, release the button.

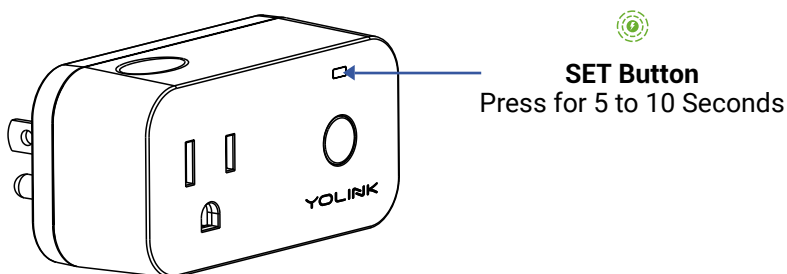

3. Upon pairing, the LED will stop blinking (this may happen after only blinking two or three times).

When the garage door sensor is opened, the plug will turn on.

Unpair your Garage Door Sensor.

1. On the Garage Door Sensor, press the hold the SET button for 10 to 15 seconds, until the LED quickly blinks red, then release the button.

2. On the Plug, press and hold the POWER button for 10 to 15 seconds, until the LED quickly blinks red, then release the button.

N Control D2D, Continued



The LED will flash green prior to the 10 second mark, going into pairing mode, but keep pressing until the LED flashes red. The Controller's pairing is now removed. This garage door sensor will no longer control the plug.

O App & 3rd-Party Services

The YoLink Garage Door Sensor works with several voice assistants, including Alexa and Google, and it works with other automation platforms such as IFTTT and Home Assistant.


To set up 3rd-party integrations (Alexa, Google and IFTTT), in the app, go to Settings, Third-Party Services, and follow the instructions.

Refer to the Home Assistant website and the YoLink integration page for instructions.


<https://www.home-assistant.io/integrations/yolink/>

P Battery Replacement

- 1 Remove the battery cover by gently prying with your fingertip or tool at the edge as shown.


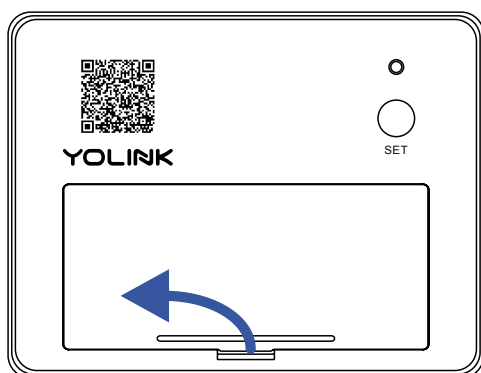


- 2 Remove the old batteries, and then press the SET button several times.

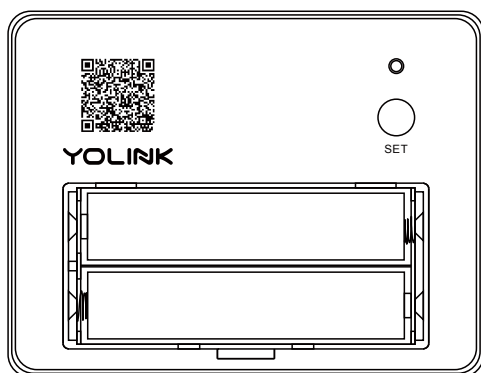

P Battery Replacement, Continued

- 3 Install two new alkaline non-rechargeable AAA batteries, and then close the battery cover.

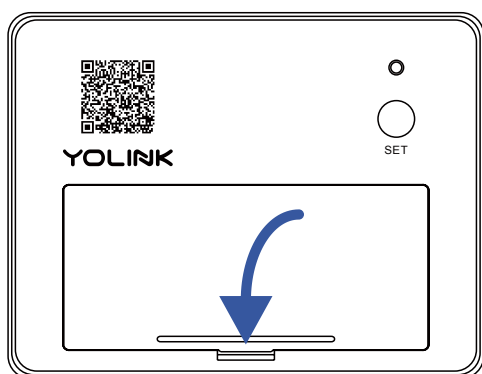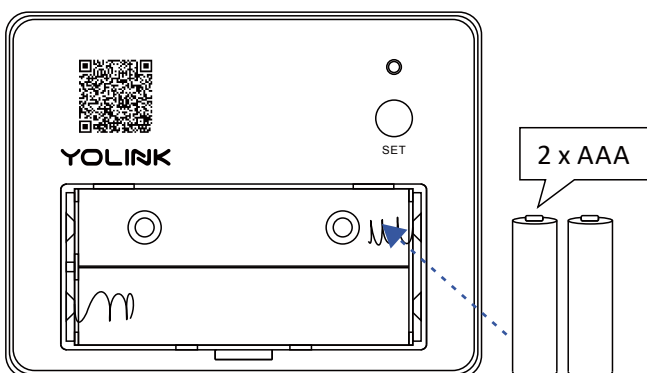

- 4 Using the app, check the online status of the sensor and verify there is no low-battery indicator.



Do not mix old and new batteries



Factory Reset

Factory reset will erase device settings and restore it to factory default settings. Doing a factory reset will not remove the device from your account and it will not harm the device, or lose any data or require you to redo your automations, etc.

Instructions:

Hold the SET button down for 20-30 seconds, until the LED blinks red and green alternately. Then, release the button. (Holding the button down longer than 30 seconds will abort the factory reset operation)

Factory reset will be complete when the LED stops blinking.




PLEASE NOTE: Only deleting a device from the app will remove it from your account. Factory reset will not delete the device from the app.

R Firmware Update

Your YoLink products are constantly being improved, with new features added. It is periodically necessary to make changes to your device's firmware. For optimal performance of your system, and to give you access to all available features for your devices, these firmware updates should be installed when they become available.

In the Detail screen of each device, at the bottom, you will see the Firmware section, as shown in the image below. A firmware update is available for your device if it says "#### ready now"

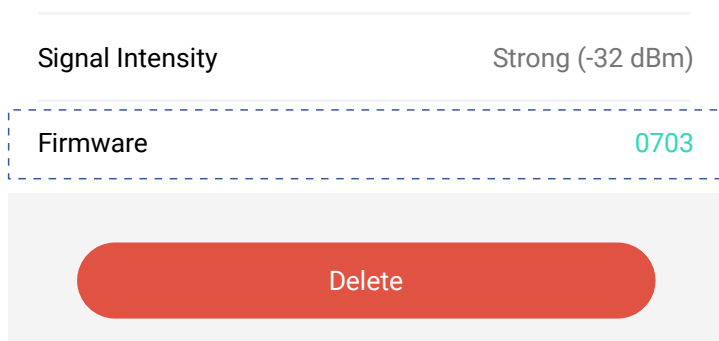

Tap in this area to start the update.

The device will update automatically, indicating progress by percentage-complete. You may use your device during the update, as the update is performed "in the background". The LED will slowly blink green during the update, and the update may continue for several minutes beyond the LED turning off.



Specifications

Voltage:	3V DC (2-AAA battery)
----------	-----------------------


Dimensions, Imperial (L x W x D):	2.56x 1.97 x 0.63 inches
--------------------------------------	-----------------------------

Dimensions, Metric (L x W x D):	65 x 50 x 16 mm
------------------------------------	-----------------


Environment:	Working Temperature: 32°F - 104°F (0°C-40°C)
	Working Humidity: 10%-90% non-condensing




Specifications, Continued

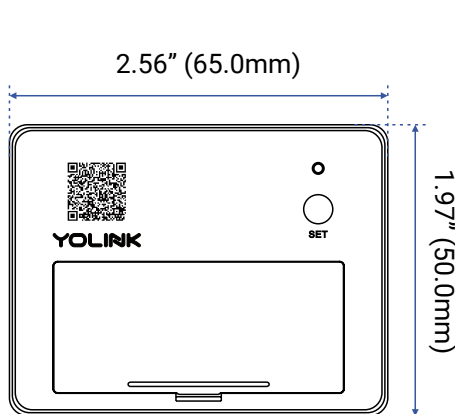

FRONT

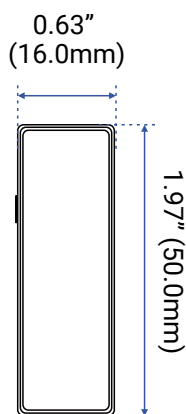

SIDE

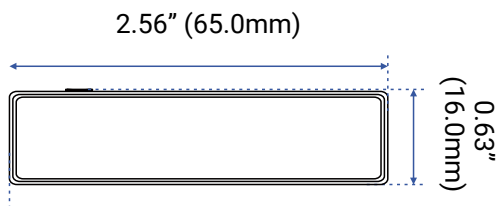

TOP

T Troubleshooting

These troubleshooting suggestions assume the device has been successfully added to the app. If the device is not working correctly and it is not in the app, return to the Add the Garage Door Sensor to the App section and double-check or re-do these steps.

A. Device can not be operated at all, and can not be operated manually via the SET button:

- 1) Ensure the device is turned on (See Power Up section, if needed).
- 2) Check batteries, verify proper installation.
- 3) Replace the batteries.

B. Device can be operated manually, but it is offline

- 1) Ensure the device is connected to the cloud, by pressing the SET button until the LED illuminates briefly.
- 2) Ensure the device is within range of the hub. If you are installing the device remotely from the hub, first place it near the hub to ensure it connects to the cloud via the hub. (Press the SET button briefly to force the device to attempt to reconnect with the cloud). If it is now online, the original location was out of range of the hub. Relocating the device, the hub, or adding an additional hub may be solutions. Contact us as needed for additional guidance.



Troubleshooting, Continued

C. If a Control-D2D-paired functionality is not working:

- 1) Review and re-do the pairing steps, as needed. You can unpair the devices and re-pair them.

D. Performing a factory reset can clear up some issues. Refer to page 27 for instructions. If the device remains non-operational, it may be defective. **Please contact us for assistance with replacing your YoLink product.**

E. Other issues, please contact us via the info on the last page of this guide.



Warnings

- Please install, operate and maintain the Garage Door Sensor only as outlined in this manual. Improper use may damage the unit and/or void the warranty
- Use only new, name brand, alkaline non-rechargeable AAA batteries
- Do not use rechargeable batteries
- Do not use zinc blend batteries
- Do not mix new and old batteries
- Do not puncture or damage batteries. Leakage can cause harm on skin contact, and is toxic if ingested
- Do not dispose of batteries in fire as they may explode! Please follow local battery disposal procedures
- Do not install or use the sensor outside of the temperature and humidity range listed in the Environmental section in Specifications, on page 29
- If your Garage Door Sensor gets dirty, please clean it by wiping it down with a clean, dry cloth. Do not use strong chemicals or detergents, which may discolor or damage the exterior and/or damage the electronics, voiding the warranty



Warnings, Continued

- Do not install or use this device where it will be subjected to physical impacts and/or strong vibration. Physical damage is not covered by the warranty
- To avoid damaging the device, if storing the device for an extended period, remove the batteries
- Please contact Customer Service before attempting to repair, disassemble or modify the device, any of which can void the warranty and permanently damage the device



2 Year Limited Electrical Warranty

YoSmart Inc. warrants to the original user ("customer") of this product that it will be free from defects in materials and workmanship, under normal use, for 2 years from the date of purchase. This warranty does not apply to devices that have been improperly installed, modified, put to a use other than designed, or subjected to acts of God (such as floods, lightning, earthquakes, etc.). This warranty does not cover neglected or abused products. This warranty is limited to the repair or replacement of the device, only, at YoSmart's sole discretion. YoSmart will NOT be liable for the cost of installing, removing, nor reinstalling this product, nor direct, indirect, or consequential damages to persons or property resulting from the use of this product. This warranty only covers the cost of replacement parts or replacement units, it does not cover shipping & handling fees. The customer must provide proof of purchase, in the form of the original purchase invoice or order number. The purchase must have been made from an authorized seller.

To implement this warranty please contact us by one of the methods listed on the Contact Us page of this user guide.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.



FCC Statement, Continued

- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

PRODUCT NAME:
GARAGE DOOR SENSOR

PARTY:
YOSMART, INC.

TELEPHONE:
831-292-4831

MODEL NUMBER:
YS7706-UC

ADDRESS:
25172 ARCTIC OCEAN DRIVE, SUITE 106, LAKE
FOREST, CA 92630 USA

EMAIL:
SERVICE@YOSMART.COM



Contact Us

We are here for you, if you ever need any assistance installing, setting up or using a YoLink app or product!

Need help? For fastest service, please email us 24/7 at service@yosmart.com

Or call us at **831-292-4831** (US phone support hours: **Monday - Friday, 9AM to 5PM** Pacific)

You can also find additional support and ways to contact us at:

www.yosmart.com/support-and-service

Or scan the QR code:



Support Home Page

Finally, if you have any feedback or suggestions for us, please email us at feedback@yosmart.com

Thank you for trusting YoLink!

YoLink Customer Support

YOLINK

25172 Arctic Ocean Drive, Suite 106 Lake Forest, CA 92630
© 2026 YOSMART INC. CALIFORNIA, USA