




Smart Power Strip

YS6801-UC

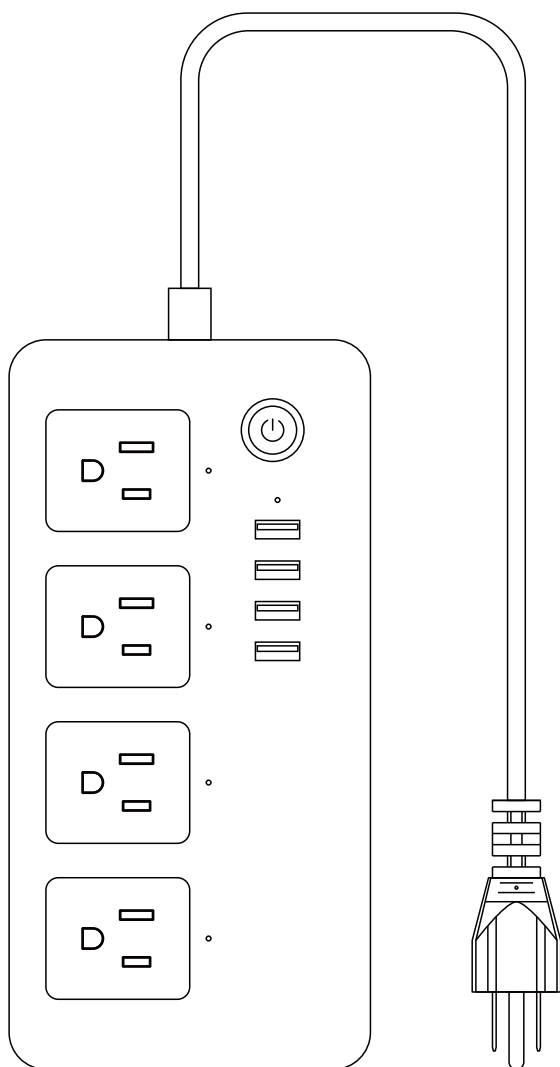

Installation & User Guide

Revision Jun. 02, 2026

Contents

A . Welcome!	01
B . Before You Begin	02
C . In the Box	03
D . Get to Know Your Smart Power Strip	04
E . Install the App	05

F . Add Your Smart Power Strip to the App	06
G . Set-Up Your Power Strip	08
H . App Functions: Device Screen	09
I . App Functions: Device Details Screen	10
J . App Functions: Schedule	12

K . App Functions: Timer	13
L . App Functions: Smart - Scene	14
M . App Functions: Smart - Automation	15
N . Control-D2D	16
O . Using the App & 3rd-Party Services	19

P . Factory Reset	20
Q . Firmware Update	21
R . Specifications	22
S . Troubleshooting	24
T . Warnings	25

U . Warranty	27
V . FCC Statement	28
W . Contact Us	30



Welcome!

Thank you for purchasing YoLink products! We appreciate you trusting YoLink for your smart home & automation needs. Your 100% satisfaction is our goal. If you experience any problems with your installation, with our products or if you have any questions that this manual does not answer, please contact us right away. See the Contact Us section for more info.

Thank you!

YoLink Customer Support

User Guide Conventions

The following icons are used in this guide to convey specific types of information:



Very important information
(can save you time!)



Good to know info but may not
apply to you

B Before You Begin

Visit our Smart Smart Power Strip support page on our website, for the latest installation guides, additional resources, information and videos by visiting:

<https://www.yosmart.com/support/YS6801-UC>

Or by scanning the QR code:



Download the most current version of the user guide by scanning the QR code:




B Before You Begin, Continued




Your Smart Power Strip connects to the internet via a YoLink hub, and it does not connect directly to your WiFi or local network. In order for remote access to the device from the app, and for full functionality, a hub is required.

This guide assumes the YoLink app has been installed on your smartphone, and a YoLink hub is installed and online (or your location, apartment, condo, etcetera, is already served by a YoLink wireless network).

C In the Box




Smart Power Strip



Quick Start Guide

D

Get to Know Your Smart Smart Power Strip

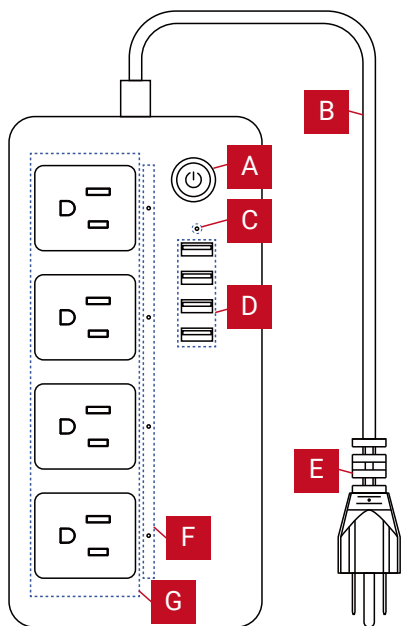

A. Combination Power Button, SET Button & Status Indicator LED

B. Power Cord

C. USB Ports Power LED Indicator

D. USB Ports

E. Power Plug

F. Plug Power Status Indicator LEDs

G. Plug 1-4

LED Behaviors

Power/SET Button Status Indicator

- **Blue**
At Least One Plug Or USB Is On
- **Red**
All Plugs And USB Are Off
- ⦿ **Blinking Blue Twice**
Connecting To Cloud
- ⦿ **Fast Blinking Blue**
Control-D2D Pairing in Progress
- ⦿ **Slow Blinking Blue**
Updating
- ⦿ **Fast Blinking Red**
Control-D2D Unpairing in Progress
- ⦿ ⦿ **Blinking Red And Blue**
Restoring To Factory Default

Power Status Indicator (USB)

- **Red**
The USB Ports Are On

Power Status Indicator (Plug)

- **Red**
The Plug Is On

E Install the App

If you are new to YoLink, please install the app on your phone or tablet, if you have not already. Otherwise, please proceed to the next section.

Scan the appropriate QR code below or find the “YoLink app” on the appropriate app store.



Apple phone/tablet
iOS 9.0 or higher



Android phone/tablet
6.0 or higher

Open the app and tap **Sign up for an account**. You will be required to provide a username and a password. Follow the instructions, to set up a new account. Allow notifications, when prompted.

You will immediately receive a welcome email from no-reply@yosmart.com with some helpful information. Please mark the yosmart.com domain as safe, to ensure you receive important messages in the future.


Log in to the app using your new username and password.

The app opens to the **Favorite** screen. This is where your favorite devices and scenes will be shown. You can organize your devices by room, in the **Rooms** screen, later.




Add Your Smart Power Strip to the App

1. Tap **Add Device** (if shown) or tap the scanner icon:

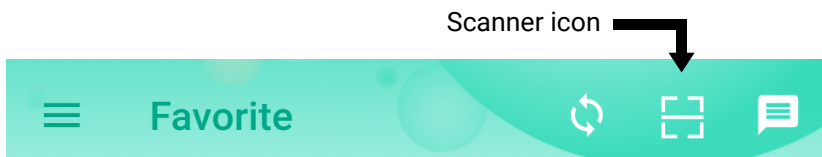

2. Approve access to your phone's camera, if requested. A viewfinder will be shown on the app.

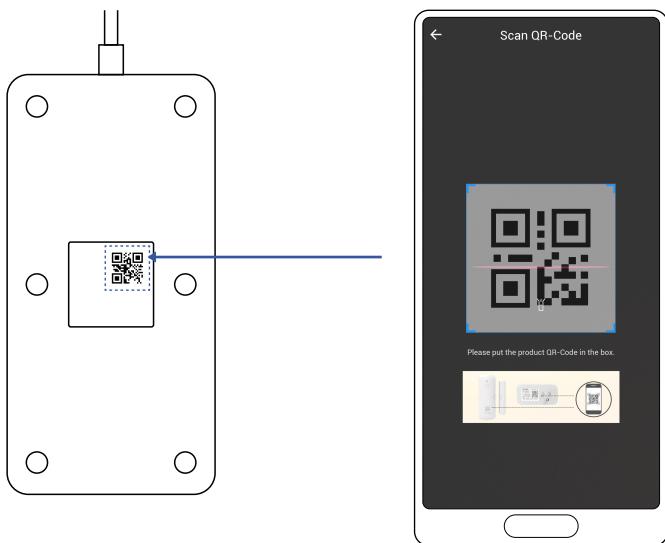


3. Hold the phone over the QR code so that the code appears in the viewfinder. If successful, the **Add Device** screen will be displayed.

F

Add Your Smart Power Strip to the App, Continued

4. You can change the device name and assign it to a room later. Tap **Bind device**.

5. If successful, the screen will appear as shown. Tap **Done**.

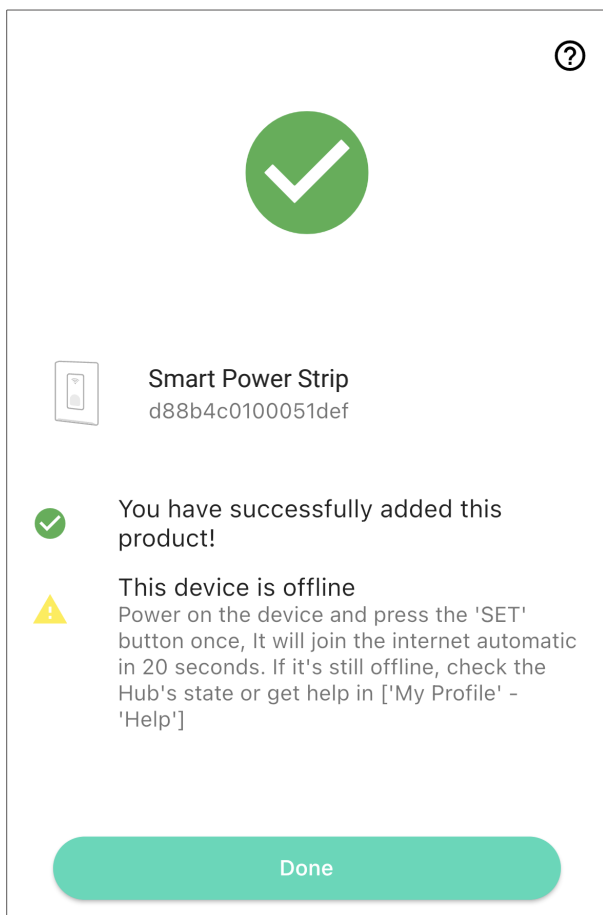



Set-Up Your Power Strip

Location considerations:

The Smart Power Strip is intended for indoor use, only. It must only be used in the temperature and humidity range as stated in the product specifications, which can be found on the product support page. It is not waterproof and it must not get wet. Place your Smart Power Strip at a clean indoor environment location, where it will not get wet.

Install and power-up the Smart Power Strip:

1. Place the Smart Power Strip on a suitable stable surface.
2. Plug the Smart Power Strip's power cord into a compatible grounded 100-120 VAC North American "Type B" NEMA 5-15 style outlet.




Plug adapters that bypass the ground connector are prohibited, as is removing the ground connector on the power cord.

3. The Power/SET button LED should briefly flash blue twice, indicating the power strip has connected to the cloud. If all USB ports and plugs are off, the LED should then turn RED.
4. In the app, confirm your Smart Power Strip is not showing "Offline". Your Smart Power Strip is now ready for use.



App Functions: Device Screen

In the app, tap on your Smart Power Strip icon. Your main screen should be similar to the one shown below.

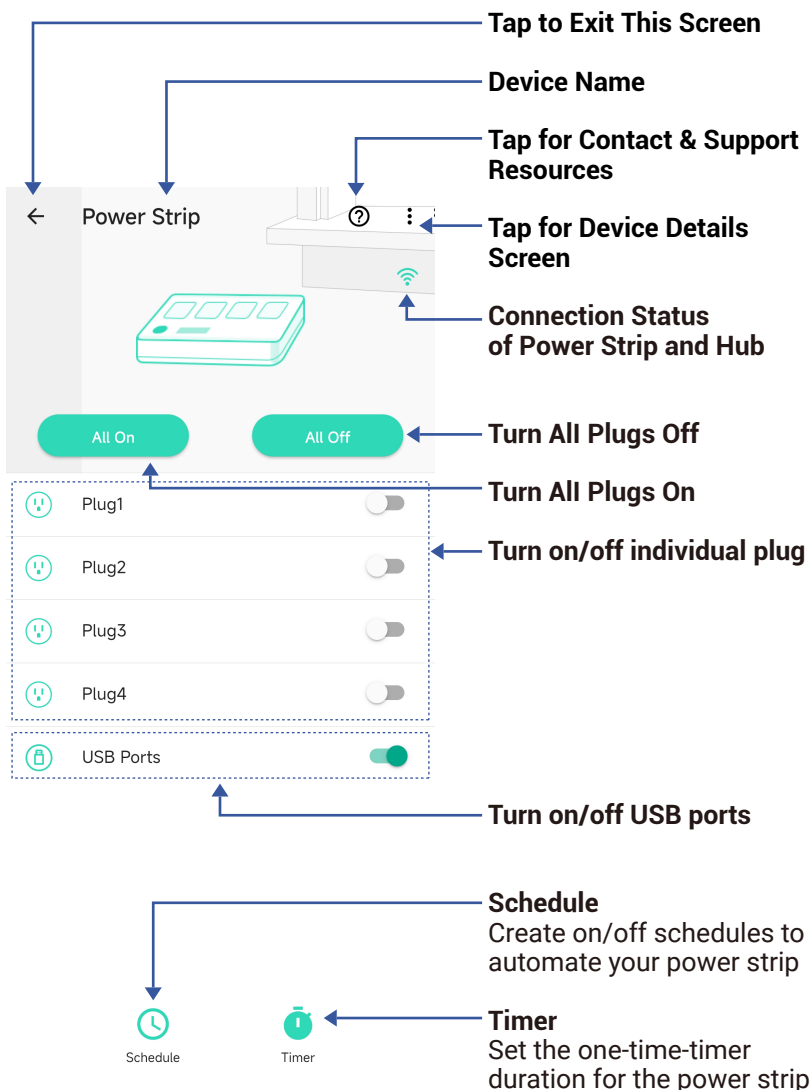



App Functions: Device Details Screen

Tap the three dots (in the upper right corner) to open the **Details** screen. Your screen should be similar to the one shown below.

← Details ⓘ

TypePower Strip

NameSmart Power Strip >

USB PortsUSB Ports >

Plug1Plug1 >

Plug2Plug2 >

Plug3Plug3 >

Plug4Plug4 >

RoomNot Set >

FavoriteWill show in favorite screen

♥

HistoryGet device logs

>

StateOn

On

Time1/18 03:05:59 (GMT+0)

Sync With Mobile >

Power On StatusAll Off ▾

All Off

Device Type

Device Name
(Tap to Edit)

USB Ports Name
(Tap to Edit)

Plugs Name
(Tap to Edit)

Room
(Tap to Edit)

Favorite
(Red if Favorite, Tap to Edit)

Device on/off History
Tap to view device history

Connection status of power
strip and Hub

Time
Tap to sync with mobile

Power On Status
Power on status after
firmware update or power
loss, choose Last State or
On or Off. Default is set to
Last State

10



App Functions: Device Details Screen, Continued

Details

Favorite

Will show in favorite screen

History

Get device logs

State

On

Time

1/18 03:06:01 (GMT+0)

Sync With Mobile

Power On Status

All Off

Other

Model

YS6801-UC

Device EUI

d88b4c010002e601

SN

690ACE3286

Signal Intensity

Strong (-45 dBm)

Firmware

010C

Delete

Model Number

Device EUI
Unique Identifier Number

Device Serial Number


Signal Intensity
(From YoLink Hub)

Firmware Revision
(Refer to page 21)

Remove Device From Current Account
Tap to delete the device from your YoLink account



App Functions: Schedule

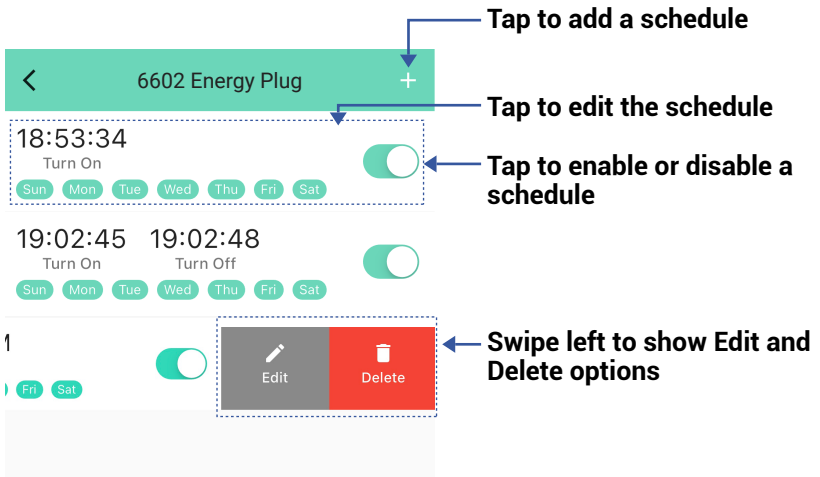

You can have a maximum 10 schedules at one time.

The schedule runs on the device (no internet connection required).

You can add more schedules in Automation settings. Automation settings are saved in the cloud.



App Functions: Timer

The screenshot shows the 'Power Strip' app interface. At the top, there's a teal header with a back arrow, the title 'Power Strip', and a checkmark. Below the header, there are four buttons labeled 'Plug1', 'Plug2', 'Plug3', and 'Plug4'. 'Plug1' is highlighted with a dashed blue border. Below the plug buttons, there are two sections: 'Turn On After' and 'Turn Off After'. Each section has a toggle switch and a timer display. The 'Turn On After' section has a toggle switch that is currently off, and the 'Turn Off After' section has a toggle switch that is currently on. Both timer displays show '0 : 30' with a scrollable list of minutes from 28 to 32. Annotations with blue arrows point to various elements: 'Tap to Edit Each Plug' points to the back arrow; 'Indicates Currently-Selected Plug' points to the dashed border around 'Plug1'; 'Turn Off After Plug Slide to enable/disable' points to the toggle switch in the 'Turn Off After' section; 'Set the duration' (twice) points to the timer displays in both sections, with additional text explaining that when enabled, the plug will turn off or on after the duration has elapsed.

Tap to Edit Each Plug

Indicates Currently-Selected Plug

Turn Off After Plug
Slide to enable/disable

Set the duration
When enabled, the Plug will turn off after this timer duration has elapsed

Turn On After Plug
Slide to enable/disable

Set the duration
When enabled, the Plug will turn on after this timer duration has elapsed

The timer starts when the settings are saved (by tapping the checkmark at the upper right of the screen).

You can add more timers in Automation settings. Automation settings are saved in the cloud.



The timer will run only once. You can set a new timer after the timer has already run once or after you cancel it.

The timer runs on the device (no internet connection required).



App Functions: Smart - Scene

The screenshot shows the 'Scene' settings interface. At the top is a teal header with a back arrow, the title 'Scene', a refresh icon, and a checkmark icon. Below the header are several sections: 'Name' with a 'New Scene >' link, 'Icon' with an icon selection button, 'Favorite' with a heart icon, and 'Group' with a 'HomeScene >' link. The 'Behavior' section lists a behavior named '6801 Power Strip' with a power icon. At the bottom is a red 'Delete' button. Annotations with arrows point to various elements: 'Tap to save the settings' points to the checkmark icon; 'Name' points to the 'New Scene >' link; 'Icon' points to the icon selection button; 'Favorite' points to the heart icon; 'Assign the scene to a scene group' points to the 'HomeScene >' link; 'Delete the behavior' points to the trash icon; 'Add behavior' points to the plus icon; 'Tap to sort behaviors' points to the list icon; and another 'Tap to sort behaviors' points to the 'Delete' button.

Tap to save the settings

Name
Tap to edit the scene name

Icon
Tap to select a scene icon

Favorite
Tap to make it a favorite scene

Assign the scene to a scene group

Delete the behavior

Add behavior
Tap to add a behavior

Tap to sort behaviors



The Scene settings are saved in the cloud.

One Scene group only shows one active scene, for example, in Home scene group, if you execute the Home scene, it will show the Home scene activated, if you execute Away scene next, the Away scene will revert the Home scene's active status to off.



App Functions: Smart - Automation

The YoLink Power Strip can be set up as a condition or action in automation.

The screenshot shows the 'Automation' settings screen. At the top is a teal header with a back arrow, the title 'Automation', and a checkmark icon. Below this is the 'Name' field, currently set to 'switch'. The 'When' section shows a schedule: 'When 12:00 AM Every Tue,Wed,Thu'. The 'Then' section shows a list of behaviors, with '6801 Power Strip' selected. The 'Working Time' section is set to 'Always Working'. At the bottom is the 'Advanced Settings' section. Annotations with arrows point to various UI elements: the checkmark icon, the 'Name' field, the 'When' section, the '+' icon to add a behavior, the '6801 Power Strip' behavior, the trash icon to delete a behavior, the sort icon, the 'Always Working' option, and the 'Advanced Settings' section.

Tap to save the settings

Edit the name of the automation

Tap to set a schedule for the automation

Add behavior
Tap to add a behavior

Delete the behavior

Tap to sort behaviors

Always Working
Tap to set when the automation can be activated

Advanced Settings
Tap to edit advanced automation and logging settings

The Automation settings are saved in the cloud.

You can edit the Advanced Settings, including save the log, retry if action fails, notify if action fails, etc.

N Control D2D

YoLink Control-D2D (device-to-device) pairing is a feature unique to YoLink products. One device can be paired to one (or more) devices. When two or more devices are paired, a link is created, “locking-in” the behavior, so that the device(s) will carry out their paired behavior when required, regardless of a connection to the internet or cloud, and even without AC power (in the case of battery-powered or battery backed-up devices). For example, a Door Sensor can be paired to a Siren Alarm, so that when the door is opened, the siren is activated.

Several important points:


- The use of Control-D2D is entirely optional. It is more common to use the app’s automation and scene settings to create desired behaviors, such as motion sensors turning on the lights automatically. Your application may require functionality during the loss of internet/WiFi, in which case Control-D2D pairing may be preferred.
- A device that controls another device is referred to as a Controller. The device that is controlled is referred to as a Responder.

N Control D2D, Continued

- While online, any paired behaviors as well as automation and scene settings (desired power strip behaviors set in advance by you, such as the motion sensor/plug example) will both be carried out. Paired behaviors and app settings can coexist, but use care to not create conflicting actions between the two, as the device may not operate as desired.
- A device can have up to 128 pairings.
- During D2D pairing, both the controller and the responder must be in the correct operational state corresponding to their intended behavior. For example, if the controller (door sensor) is meant to turn on a plug when the door opens, the door sensor should be in the open state and the plug should be on during pairing.


The following instructions use pairing your Door Sensor with a YoLink Power Strip as an example, when door is open, turn on the power strip.
(support turn on/off all plugs of the power strip only)

1. To configure your Door Sensor as a controller, open the door, press and hold the SET button for 5-10 seconds until the LED quickly blinks green, then, release the button.

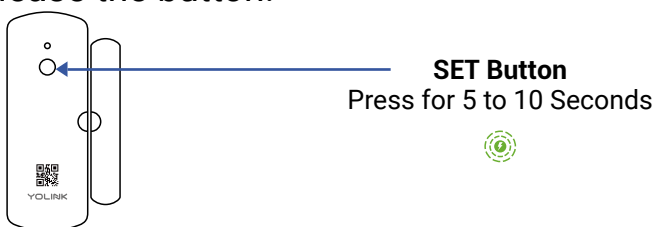

N Control D2D, Continued

2. To configure a YoLink Plug as the responder, turn on all the plugs by pressing the POWER button or via YoLink app. Press and hold the POWER button for 5-10 seconds until the LED quickly blinks blue, then, release the button.

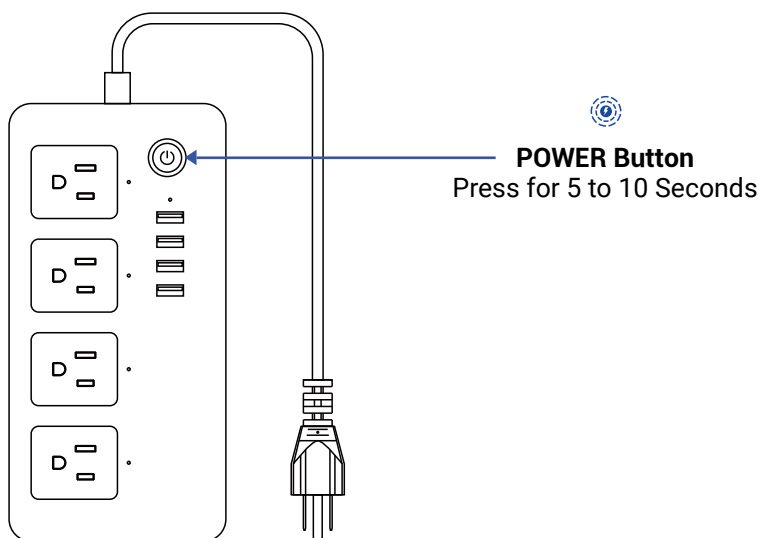

3. Upon pairing, the LED will stop blinking (this may happen after only blinking two or three times).

When the door sensor is opened, the power strip will turn on. The power strip will remain on status until turned off via the app or press the POWER button.

Unpair your YoLink Power Strip:

1. On the Door Sensor, press the hold the SET button for 10 to 15 seconds, until the LED quickly blinks red, then release the button.



Control D2D, Continued

2. On the Power Strip, press and hold the POWER button for 10 to 15 seconds, until the LED quickly blinks red, then release the button.



The LED will flash green/blue prior to the 10 second mark, going into pairing mode, but keep pressing until the LED flashes red. The Controller's pairing is now removed. This door sensor will no longer control the power strip.



Using the App & 3rd-Party Services

The YoLink Power Strip works with several voice assistants, including Alexa and Google, and it works with other automation platforms such as IFTTT and Home Assistant.

To set up 3rd-party integrations (Alexa, Google and IFTTT), in the app, go to Settings, Third-Party Services, and follow the instructions.

Refer to the Home Assistant website and the YoLink integration page for instructions.

<https://www.home-assistant.io/integrations/yolink/>

Factory Reset

Factory reset will erase device settings and restore it to factory default settings. Doing a factory reset will not remove the device from your account and it will not harm the device, or lose any data or require you to redo your automations, etc.

Instructions:

Hold the POWER button down for 20-30 seconds, until the LED blinks red and blue alternately. Then, release the button. (Holding the button down longer than 30 seconds will abort the factory reset operation)

Factory reset will be complete when the LED stops blinking.




Only deleting a device from the app will remove it from your account. Factory reset will not delete the device from the app.



Firmware Update

Your YoLink products are constantly being improved, with new features added. It is periodically necessary to make changes to your device's firmware. For optimal performance of your system, and to give you access to all available features for your devices, these firmware updates should be installed when they become available.

In the Detail screen of each device, at the bottom, you will see the Firmware section, as shown in the image below. A firmware update is available for your device if it says "#### ready now"

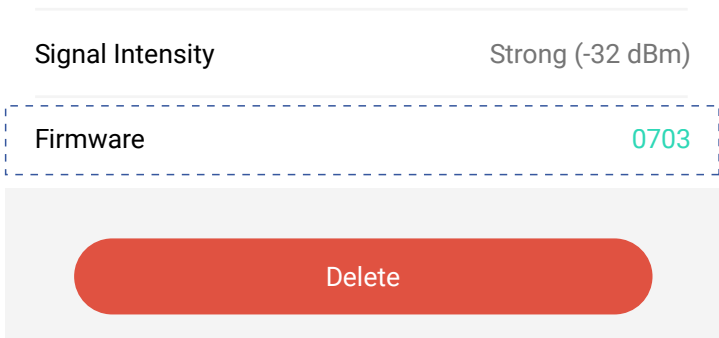

Tap in this area to start the update.

The device will update automatically, indicating progress by percentage-complete. You may use your device during the update, as the update is performed "in the background". The LED will slowly blink green during the update, and the update may continue for several minutes beyond the LED turning off.



Specifications

Input:	100 - 120V AC, 60Hz
--------	---------------------

AC Power Output:	100 - 120V AC, 10A MAX (Resistive)
------------------	---------------------------------------


USB Power Output:	5V DC, 2.1A
-------------------	-------------

Dimensions, Imperial (L x W x D):	7.88 x 3.94x 1.14 inches
--------------------------------------	-----------------------------


Dimensions, Metric (L x W x D):	200 × 100 × 29 mm
------------------------------------	-------------------

Power Cord (power plug included):	~5 feet
--------------------------------------	---------


Environment:	Temperature: -22°F - 158°F (-30°C-70°C) Humidity: < 95% non-condensing
--------------	--

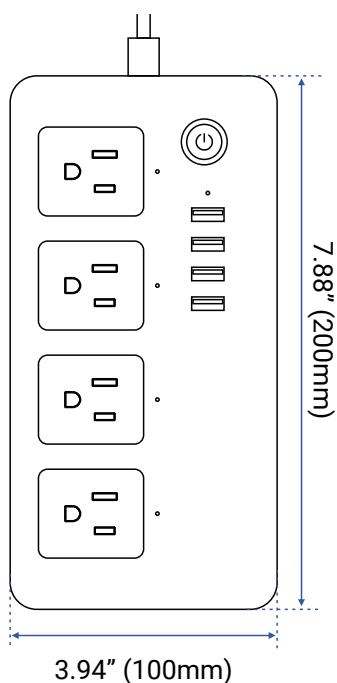

FRONT

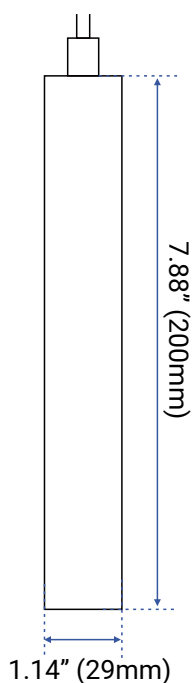

SIDE



TOP

Malfunction:

Device is offline :

Possible solution

- If power strip is not connected to the cloud, press the POWER button on power strip once
- If Hub is offline, reconnect the Hub to the Internet and press the POWER button on power strip once
- If Hub is not on, power on the Hub again and press the POWER button on power strip once
- If power strip is out of range with Hub, relocating the Hub may be required
- If power strip is not turned on, turn on the device

Timer does not run :

Possible solution

- Power outages (before or during) can prevent the timer from executing. Press the power button once to turn on/off the power strip, also you can turn on/off the power strip via YoLink app or set a new timer.

If this does not resolve the issue, please contact our customer support department (see the contact info on the last page of this guide).

S Troubleshooting, Continued



We recommend checking for and performing any available firmware updates before contacting customer support.

T Warnings

- Please install, operate and maintain the Smart Power Strip only as outlined in this manual. Improper use may damage the unit and/or void the warranty.
- Refer to Specifications (page 22) for the device environmental limitations.
- Do not install or use this device where it will be subjected to high temperatures and/or open flame
- This device is not waterproof and is designed and intended only for indoor use.
- Subjecting this device to outdoor environment conditions such as direct sunlight, extreme hot, cold temperatures or extreme humid, rain, water and/or condensation can damage the device and will void the warranty

T Warnings, Continued

- Install or use this device only in clean environments. Dusty or dirty environments may prevent the proper operation of this device, and will void the warranty. If your Smart Power Strip does get dirty, please clean it by wiping it down with a clean, dry cloth.
- Do not use strong chemicals or detergents, which may discolor or damage the exterior and/or damage the electronics, voiding the warranty.
- Do not install or use this device where it will be subjected to physical impacts and/or strong vibration. Physical damage is not covered by the warranty.
- Please contact Customer Service before attempting to repair, disassemble or modify the device, any of which can void the warranty and permanently damage the device.

1 Year Limited Electrical Warranty

YoSmart Inc. warrants to the original user (“customer”) of this product that it will be free from defects in materials and workmanship, under normal use, for 1 year from the date of purchase. This warranty does not apply to devices that have been improperly installed, modified, put to a use other than designed, or subjected to acts of God (such as floods, lightning, earthquakes, etc.). This warranty does not cover neglected or abused products. This warranty is limited to the repair or replacement of the device, only, at YoSmart's sole discretion. YoSmart will NOT be liable for the cost of installing, removing, nor reinstalling this product, nor direct, indirect, or consequential damages to persons or property resulting from the use of this product. This warranty only covers the cost of replacement parts or replacement units, it does not cover shipping & handling fees. The customer must provide proof of purchase, in the form of the original purchase invoice or order number. The purchase must have been made from an authorized seller.

To implement this warranty please contact us by one of the methods listed on the Contact Us page of this user guide.

V FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.



FCC Statement, Continued

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

PRODUCT NAME:
SMART POWER STRIP

PARTY:
YOSMART, INC.

TELEPHONE:
831-292-4831

MODEL NUMBER:
YS6801-UC

ADDRESS:
25172 ARCTIC OCEAN DRIVE, SUITE 106 LAKE
FOREST, CA 92630 USA

EMAIL:
SERVICE@YOSMART.COM



Contact Us

We are here for you, if you ever need any assistance installing, setting up or using a YoLink app or product!

Need help? For fastest service, please email us 24/7 at service@yosmart.com

Or call us at **831-292-4831** (US phone support hours: **Monday - Friday, 9AM to 5PM** Pacific)

You can also find additional support and ways to contact us at:

www.yosmart.com/support-and-service

Or scan the QR code:



Support Home Page

Finally, if you have any feedback or suggestions for us, please email us at feedback@yosmart.com

Thank you for trusting YoLink!

YoLink Customer Support

YOLINK

25172 Arctic Ocean Drive, Suite 106 Lake Forest, CA 92630
© 2026 YOSMART INC. CALIFORNIA, USA