




## YoLink Smart Lock (Door Lever)

YS7617-UC

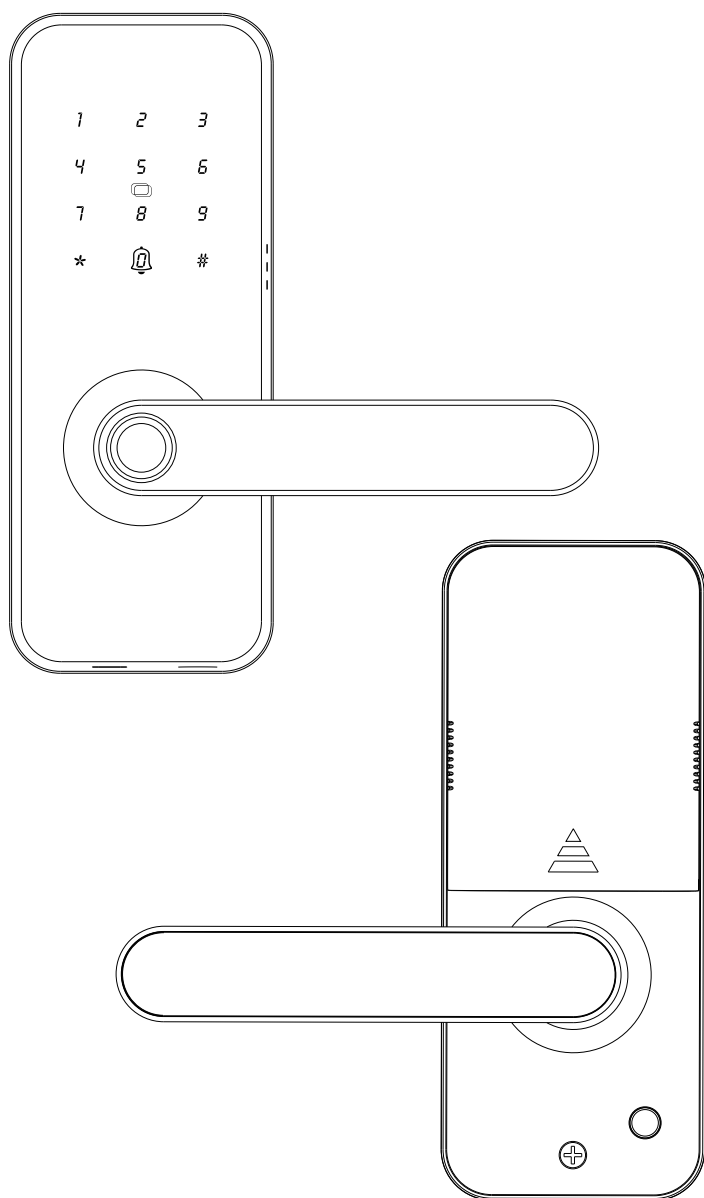

Installation & User Guide

Revision Jun. 02, 2026

# Contents

|                                        |    |
|----------------------------------------|----|
| A . Welcome                            | 01 |
| B . Before You Begin                   | 02 |
| C . In the Box                         | 04 |
| D . Get to Know Your YoLink Smart Lock | 06 |
| E . Install the App                    | 09 |

---

|                                           |    |
|-------------------------------------------|----|
| F . Add Your YoLink Smart Lock to the App | 10 |
| G . Installation                          | 12 |
| H . Operations                            | 23 |
| I . App Functions: Device Screen          | 28 |
| J . App Functions: Device Details Screen  | 29 |

---

|                                          |    |
|------------------------------------------|----|
| K . App Functions: Temporary Code Manage | 32 |
| L . App Functions: Member Manage         | 33 |
| M . App Functions: Alarm Strategy Screen | 34 |
| N . App Functions: Smart – Scene         | 36 |
| O . App Functions: Smart – Automation    | 37 |

---

|                              |    |
|------------------------------|----|
| P . Control D2D              | 38 |
| Q . App & 3rd-Party Services | 40 |
| R . Battery Replacement      | 41 |
| S . Factory Reset            | 43 |
| T . Firmware Update          | 44 |

---

|                    |    |
|--------------------|----|
| U . Specifications | 46 |
| V . Warnings       | 47 |
| W . Warranty       | 49 |
| X . FCC Statement  | 50 |
| Y . Contact Us     | 52 |



## Welcome

Thank you for purchasing YoLink products! We appreciate you trusting YoLink for your smart home & automation needs. Your 100% satisfaction is our goal. If you experience any problems with your installation, with our products or if you have any questions that this manual does not answer, please contact us right away. See the Contact Us section for more info.

Thank you!

YoLink Customer Support

---

## User Guide Conventions

The following icons are used in this guide to convey specific types of information:



Very important information  
(can save you time!)



Good to know info but may not  
apply to you

## B Before You Begin

Visit our YoLink Smart Lock (Door Lever) support page on our website, for the latest installation guides, additional resources, information and videos by visiting:

<https://www.yosmart.com/support/YS7617-UC>

Or by scanning the QR code:



Download the most current version of the user guide by scanning the QR code:






## B Before You Begin, Continued




The YoLink Smart Lock (Door Lever), is a stand-alone electronic keypad Door Lever which provides four methods for both unlocking and locking the door: the knob, the mechanical key, the keypad and the YoLink App. Add the smart lock to the YoLink App, you can lock or unlock the door and check the historical unlocked record (including member, method, date and time) through the App. When the door is unlocked, notifications will be sent to you via the YoLink app. (available notifications types are: email, text/SMS and push/banner notifications on your Apple or Android smartphone, each configurable in app settings)


## C In the Box




Front Panel




Back Panel




Hole Drawing Paper




Back Inner Plate




key (2)



IC Card (2)




Strike Plate & Buckle Box



Quick Start Guide


## C In the Box, Continued




AA Battery (4, Non-rechargeable)




Lock Body Mounting Screws (5)




Mounting Studs Type (3)




Panel Mounting Screws Type (6)



Square Spindle



Spring




Lock Body


D

## Get to Know Your YoLink Smart Lock (Door Lever)

Front Panel:

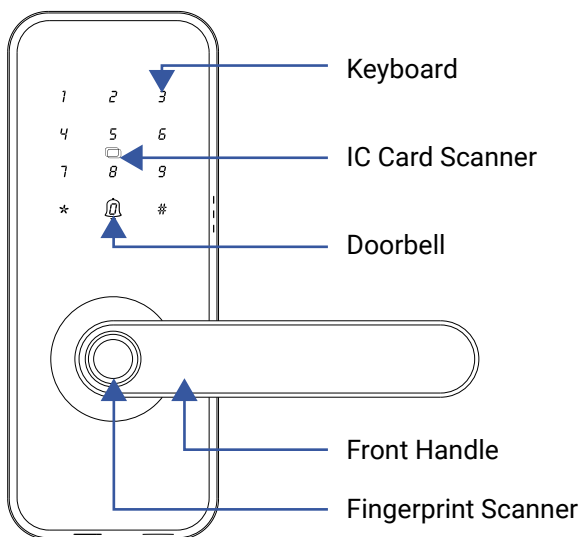


The bottom of front panel:

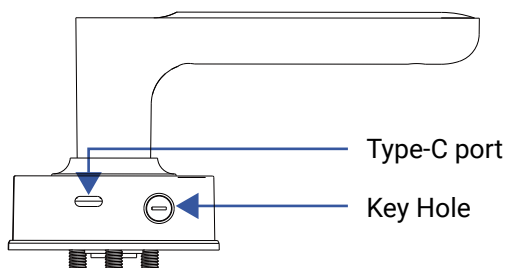

D


## Get to Know Your YoLink Smart Lock (Door Lever), Continued

### Back Panel:

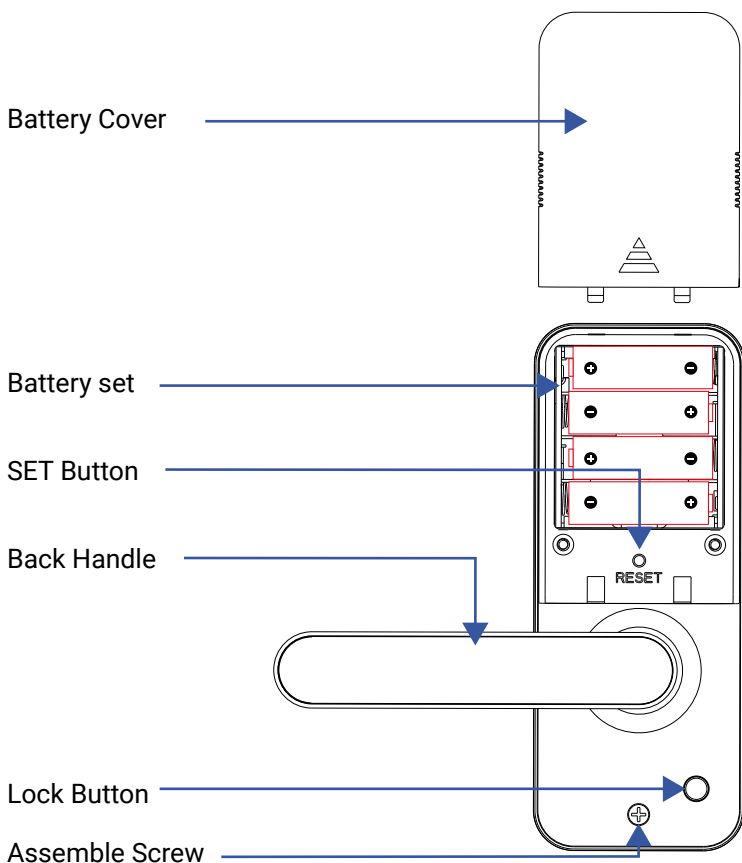

# D

## Get to Know Your YoLink Smart Lock (Door Lever), Continued

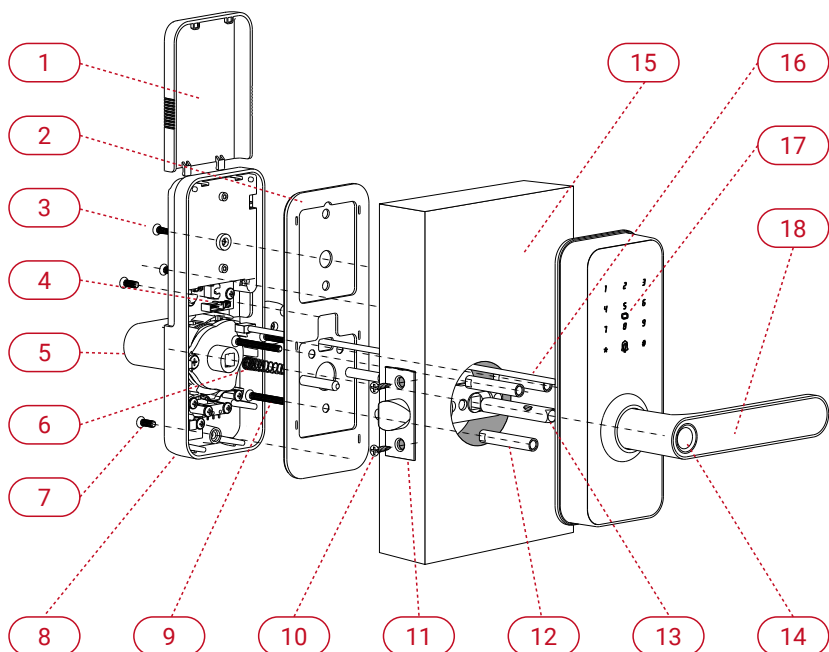

1) Battery Cover

2) Back Plate

3) Back Panel

4) Panel Screw 1

5) Back Handle

6) Panel Mounting Screw 2

7) Panel Screw 3

8) Handle Tower Spring

9) Panel Screw 1

10) Lock Body

11) Lock Body Screw

12) Spindle

13) Assamble Screw Blot 1

14) Assamble Screw Blot 2

15) Door

16) Cable Hole

17) Assamble Screw Blot 1

18) Main Data Cable

19) Front Panel

20) Front Handle

## E Install the App

If you are new to YoLink, please install the app on your phone or tablet, if you have not already. Otherwise, please proceed to the next section.

Scan the appropriate QR code below or find the “YoLink app” on the appropriate app store.



Apple phone/tablet  
iOS 9.0 or higher



Android phone/tablet  
6.0 or higher

Open the app and tap **Sign up for an account**. You will be required to provide a username and a password. Follow the instructions, to set up a new account. Allow notifications, when prompted.

You will immediately receive a welcome email from no-reply@yosmart.com with some helpful information. Please mark the yosmart.com domain as safe, to ensure you receive important messages in the future.


Log in to the app using your new username and password.

The app opens to the **Favorite** screen. This is where your favorite devices and scenes will be shown. You can organize your devices by room, in the **Rooms** screen, later.




## Add Your YoLink Smart Lock (Door Lever) to the App

1. Tap **Add Device** (if shown) or tap the scanner icon:

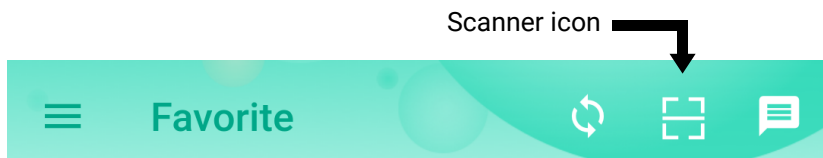

2. Approve access to your phone's camera, if requested. A viewfinder will be shown on the app.

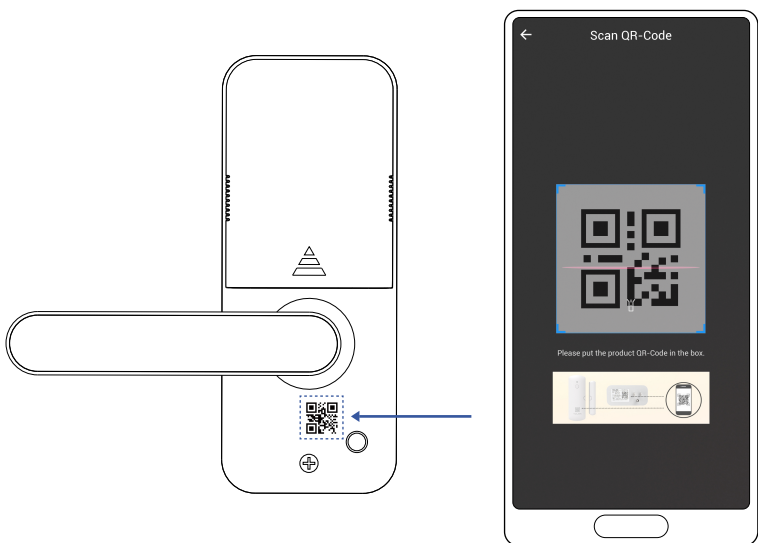

3. Hold the phone over the QR code so that the code appears in the viewfinder. If successful, the **Add Device** screen will be displayed.




F

## Add Your YoLink Smart Lock (Door Lever) to the App, Cont.

4. You can change the device name and assign it to a room later. Tap **Bind device**.

5. If successful, the screen will appear as shown. Tap **Done**.

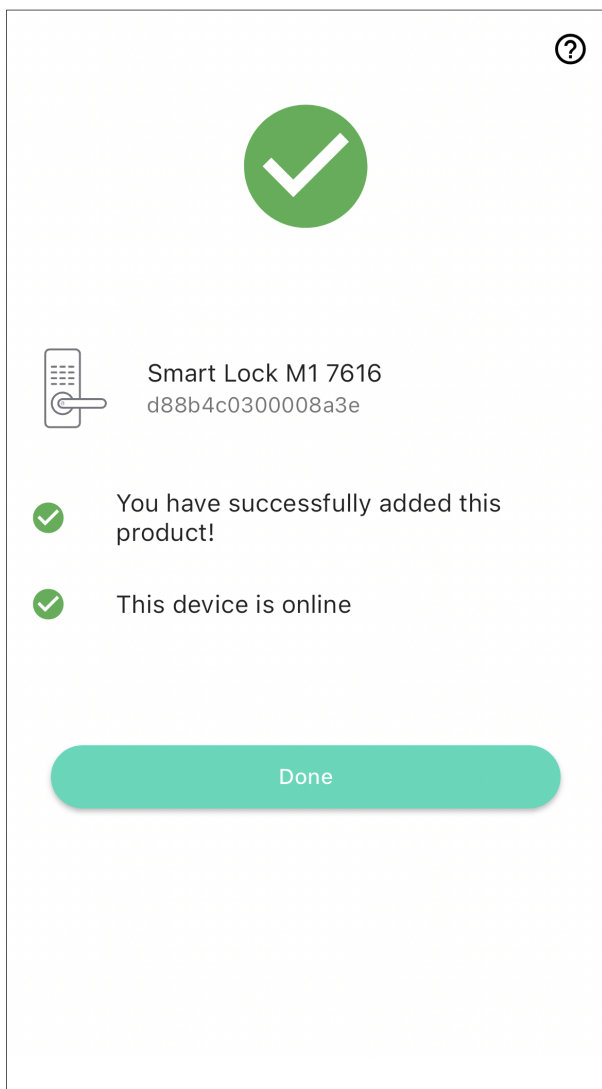




## Installation

### Confirm your door is inside opening or outside opening

The orientation of the lock cylinder determines whether the door is an inside opening door or an outside opening door.


### Lock Cam Curved surface towards closing door direction

- a. Close the door direction
- b. Open the door direction

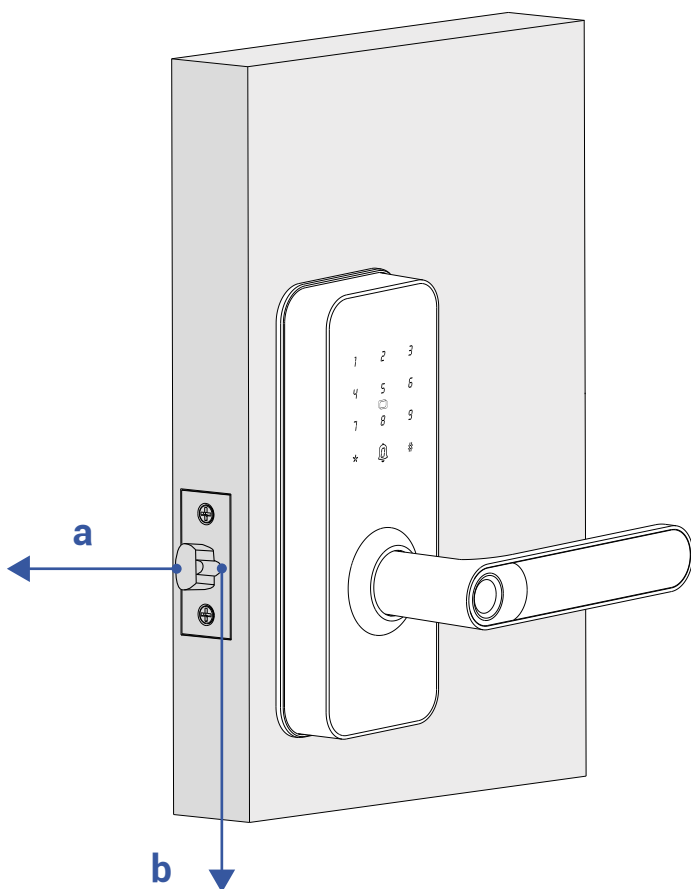


## G Installation, Continued


### Installation Diagram

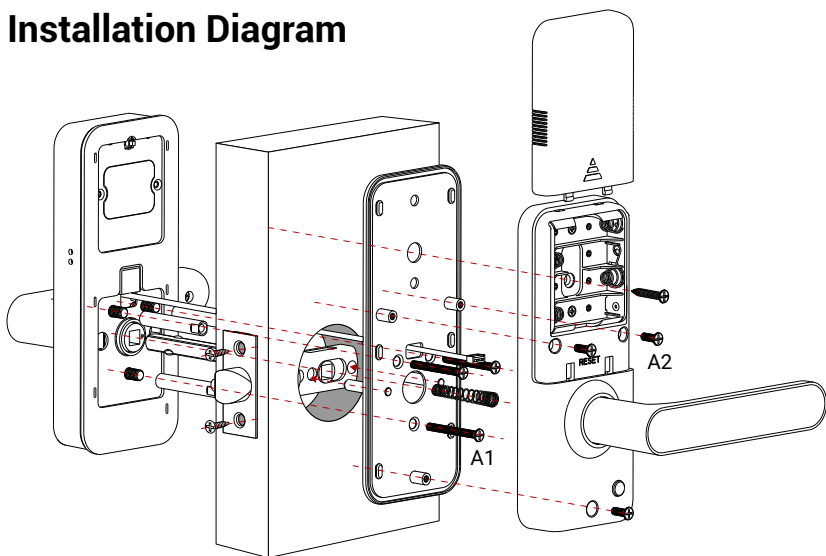

### Place Hole Drawing Paper On Door

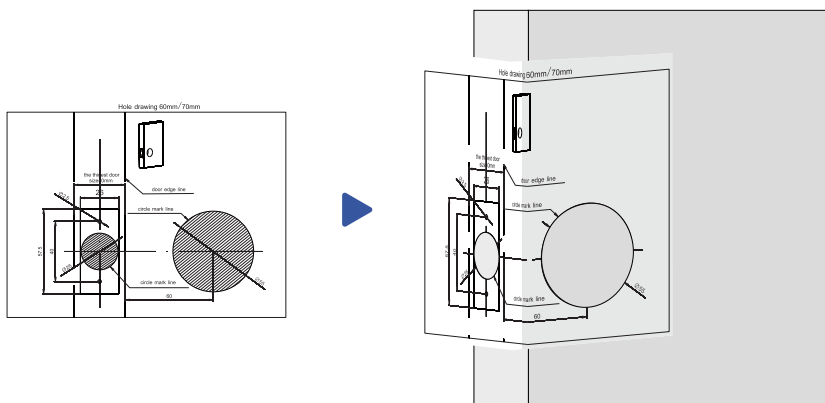


### Open Hole For Lockset

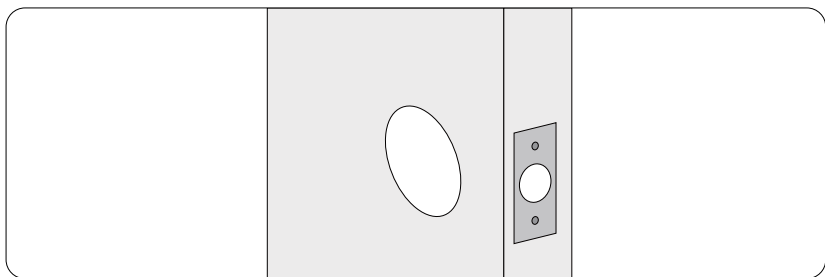


## G Installation, Continued

### 1. Prepare Door And Check Dimensions

- Measure to confirm that the hole in the door is 2.17" (55mm)
- Measure to confirm that the backset is either 2.3" or 2.76" (60mm or 70mm)
- Measure to confirm that the hole in the door is 0.98" (25mm)





- Measure to confirm that door thickness is between 1.57" to 2.16" (40mm to 55mm)

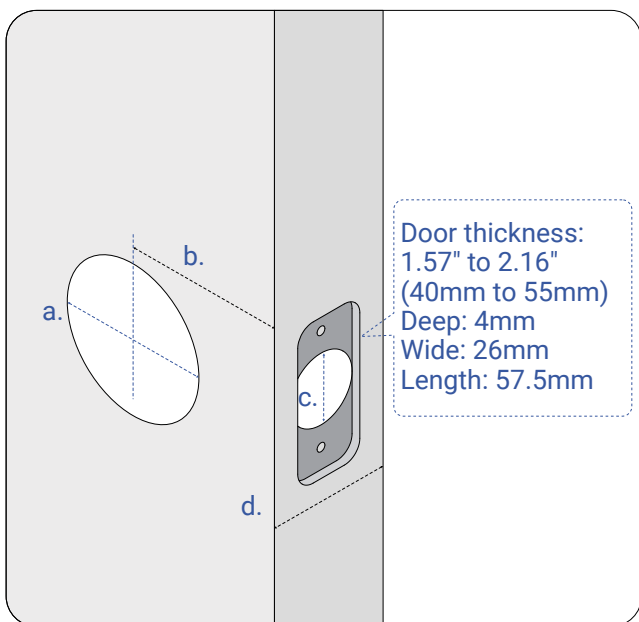



## **G** Installation, Continued

### **2. Open Strike Hole, Deep 12 Mm, And Install It With Screw**

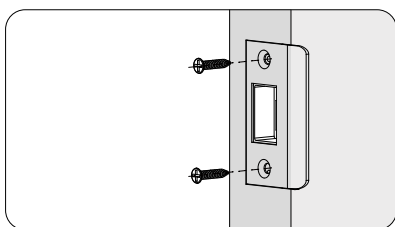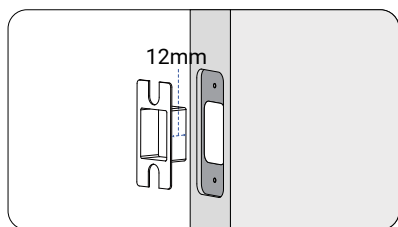


### **3. Install Lock Body**

- a. The lock body can adjust to lengths of 60 and 70mm. Please choose according to the length of the door panel opening

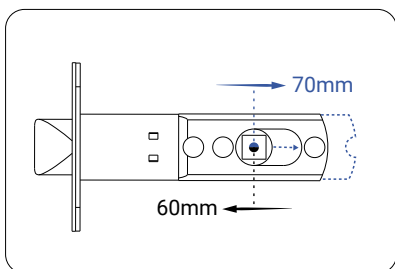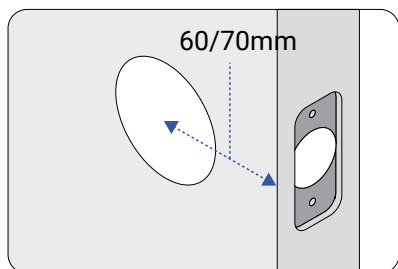


- b. Make sure the lock body Lock Cam Curved surface towards closing door direction

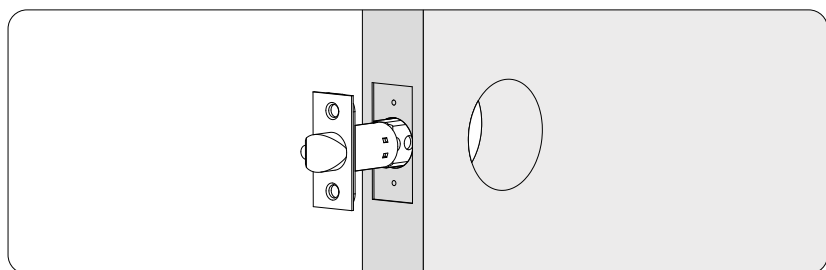


## G Installation, Continued

- c. Install the lock body into the door panel. Use Lock Body Mounting Screws\*2

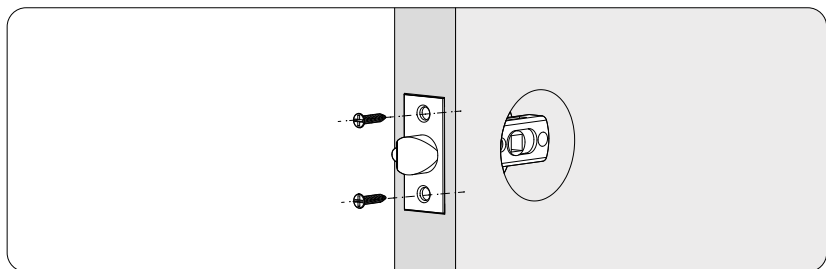


### 4. Adjust Lock Body


Left-outside-opening door




Right-outside-opening door



Left-inside-opening door




Right-inside-opening door



## G Installation, Continued


### 5. Install Square Spindle

The dot short side stands the outside of the door, and insert the square spindle into the square hole of the lock body

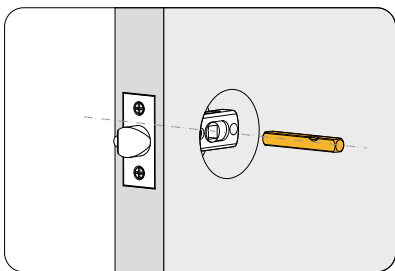


### 6. Adjust Front Handle. The Dot direction must be same as the handle

- If the lock has the correct door handle, you can just go to step 6-2.

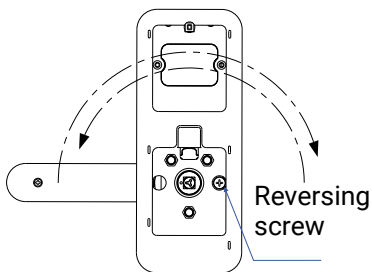

#### 6-1

Unscrew the reversing screw, adjust the direction of handle by rotating it as needed, tighten the reversing screw after adjusting. Press the handle times to ensure it is smooth, then install the mounting plate of the front plate.




#### 6-2

According to the direction of the handle to choose the direction of the small dot.



## Installation, Continued

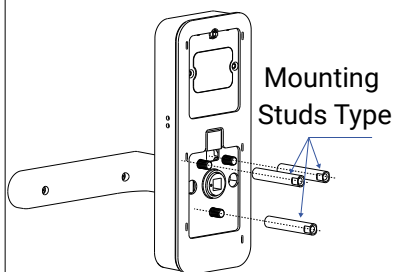


6-3

After door handle reversal is complete, put mounting studs onto the front panel.

### 7. Adjust Back Handle

Unscrew the reversing screw, adjust the direction of handle by rotating it as needed, tighten the reversing screw after adjusting. Press the handle times to ensure it is smooth.

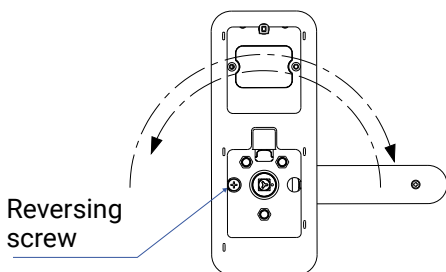


If the lock has the correct door handle, you can skip straight to step 9.



## 8. Install Front Panel

- a. Insert the square spindle from the outside of the door into the square hole of the lock body (as picture shows to install).
- b. The dot side faces the outside of the door.
- c. Take the main cable above through hole to Back panel, put dot side of square spindle into front panel, and make front panel close to the door surface.

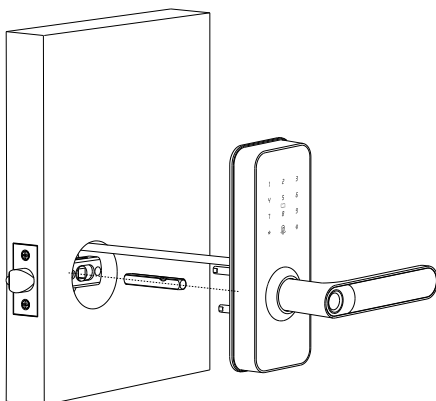




## Installation, Continued


### 9. Install Mounting Plate

- Fix the mounting plate onto the inside door surface by using 3pcs mounting screws.
- Adjust the front panel and assemble screw bolt to make the panel vertical.
- Then tighten mounting plate with screws.

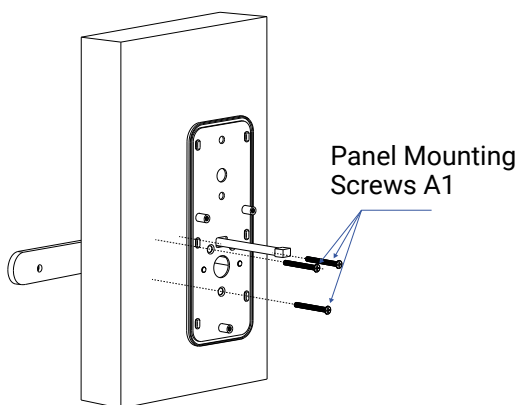


### 10. Install Spring

Tuck the spring into the square hole in the back panel.




### 11. Install Main Cable

Plug the main cable into the back panel main cable interface.

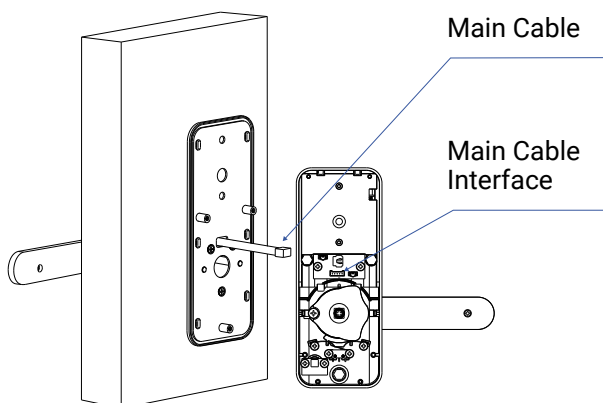


### 12. Install Back Panel

- Insert the square spindle into that square hole of the back panel.
- Then install the back panel assembly to the back mounting plate, tighten panel mounting screw A2. Install the Lock Body Mounting Screw by electric screwdriver, if needed.

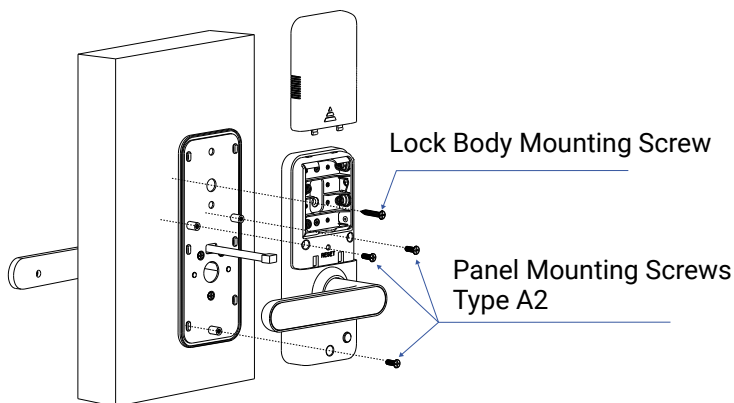

### 13. Install battery and battery cover


- a. Install 4 batteries in the battery compartment.
- b. Press the SET button.
- c. Install the battery cover.

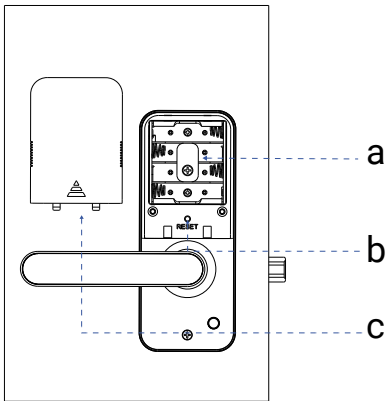

## 1. Set the Local Password

Each YoLink Smart Lock supports only one local password. You will need to set the local password physically. The local password can only be set once. To reset it, the device must be restored to factory settings.

- Steps: After waking up the keypad, press **\*##**, then enter a 4-8 digit password and press **#** to confirm. You need to re-enter the password and press **#** again to verify for accuracy.

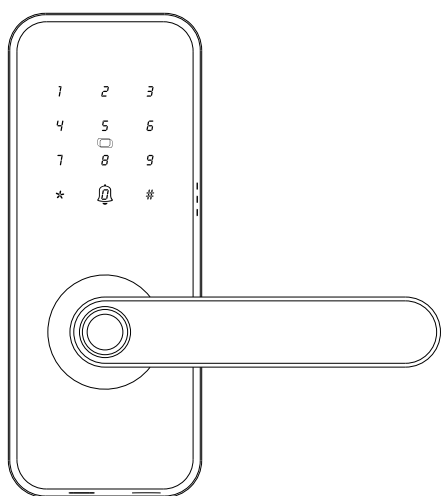

For security reasons: If you set the local password before adding the lock to the app, the local password can continue to be used. If you do not set the local password before adding the lock to the app, it will no longer support setting a local password.



### 2. Unlock the Door

- a) Place your finger on the fingerprint scanner. Once the lock successfully recognizes the fingerprint, the door will unlock.
- b) Enter a password on the front module followed by the # button. When the password is correct and valid, the door will unlock.
- c) Place the IC card on the RFID card scanner. Once the lock successfully recognizes the card, the door will unlock.
- d) Press the "ON" button on the Fob. If the Fob is paired with the lock, the door will unlock.
- e) You can also use a mechanical key to unlock the door.
- f) The door can be unlocked remotely via the app.



## Operations, Continued

### Scramble Security Feature:

You can enter a valid password before, after or in-between a series of random numbers (up to a total of 21 digits) followed by the “unlocked” button, as shown in Figure I.



Figure I




The Lock will be automatically locked for 90 seconds after the wrong password is entered for 5 times in 5 minutes, you can't deal with any operations with the lock. You can unlock the door using a mechanical key or through YoLink app.




## Operations, Continued

### 3. Lock the Door

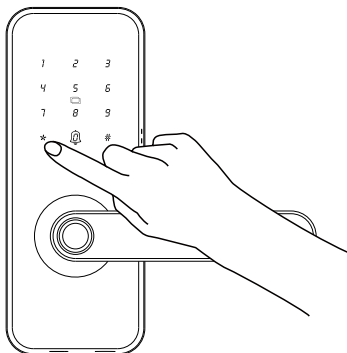

Method A: Press the "\*" button after unlock the door within 5 seconds.

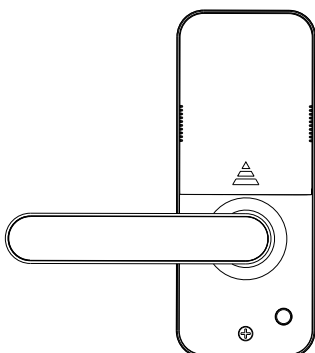

Method B: Auto-lock Settings in the app, default is 10 seconds.

Auto Lock

3 seconds >




Make sure you have at least one method to unlock the door before you lock it.




### 4. Anti-Unlock Mode

Pressing the Lock Button inside activates Anti-Unlock Mode, allowing the door to be unlocked only from the inside, or through the app, or via fob, or key. **The fingerprint, IC card, and password entry by member (admin excluded) from outside are disabled.**

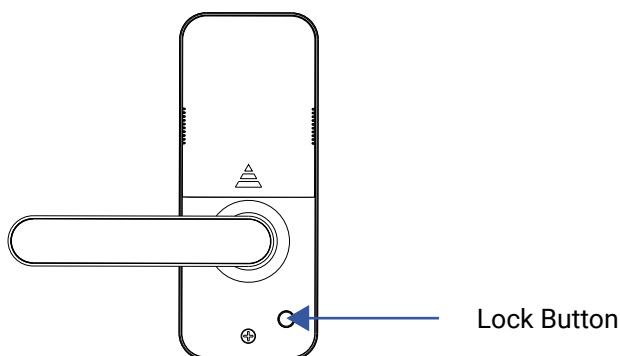

### 5. Doorbell


There will be an alert notification sent to your YoLink account to notice you someone is pressing down the doorbell button. Repeatedly pressing the doorbell within 10 seconds will not trigger another notification.

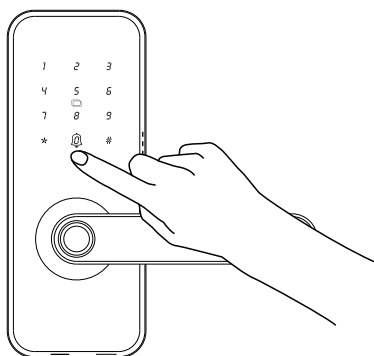



# App Functions: Device Screen

In the app, tap on your YoLink Smart Lock (Door Lever) icon. Your YoLink Smart Lock (Door Lever) main screen should be similar to the one shown below.

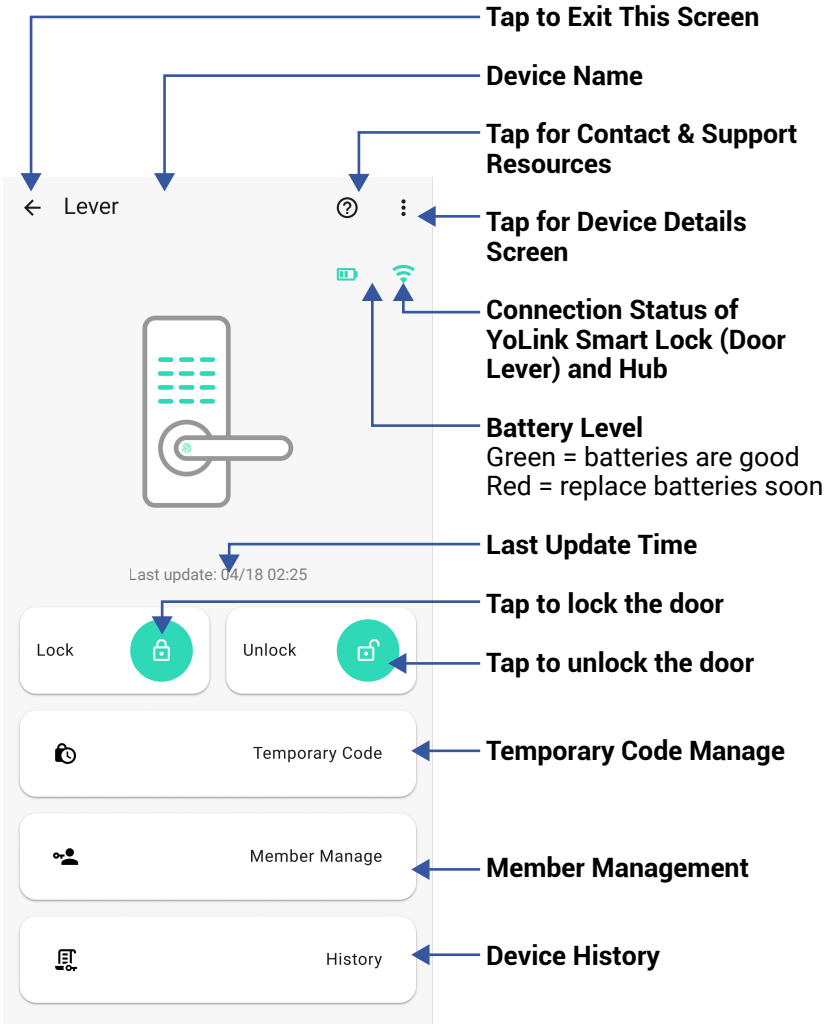



# App Functions: Device Details Screen

Tap the three dots (in the upper right corner) to open the YoLink Smart Lock (Door Lever) **Details** screen. Your Smart Lock's screen should be similar to the one shown below.

The screenshot shows the 'Details' screen for a YoLink Smart Lock. The header is teal with a back arrow, the title 'Details', and a help icon. The main content area lists various settings with blue arrows pointing to specific features:

- Device Type**: Points to 'Smart Lock M1'.
- Device Name**: Points to 'Smart Lock M1 7616' with a right arrow.
- Room**: Points to 'Not Set' with a right arrow.
- Favorite**: Points to a red heart icon. Text below: 'Will show in favorite screen'.
- Alarm Strategy**: Points to 'Default' with a right arrow. Text below: 'You will be notified according to selected alarm strategy when device alerts' and a link 'View your alarm strategies'.
- Device history**: Points to a right arrow. Text below: 'Get device activity logs'.
- Time**: Points to 'Sync With Mobile' with a right arrow. Text below: '7/15 09:23:55 (GMT+0)'.
- Lock Volume**: Points to 'Medium' with a dropdown arrow.
- SET Physical Button**: Points to a toggle switch.
- Auto Lock Settings**: Points to '10 seconds' with a right arrow.

At the bottom, there is a section labeled 'Other'.



# App Functions: Device Details Screen, Continued

## < Details ?

Time

7/15 09:23:58 (GMT+0)

Sync With Mobile >

Lock Volume

Medium

>

SET Physical Button

Auto Lock

10 seconds

>

Other

Model

YS7617-UC

>

Device EUI

d88b4c0300008a3e

>

SN

68FFCC5E4D



>

Signal Intensity

Strong (-41 dBm)

>

Battery



Firmware

0017

>

Delete

**Model Number**

**Device EUI**  
Unique Identifier Number

**Device Serial Number**

**Signal Intensity**  
(From YoLink Hub)


**Battery**

**Firmware Revision**  
(Refer to page 42)

**Remove Device from Current Account**  
Tap to delete the device from your YoLink account



# App Functions: Device Details Screen, Continued

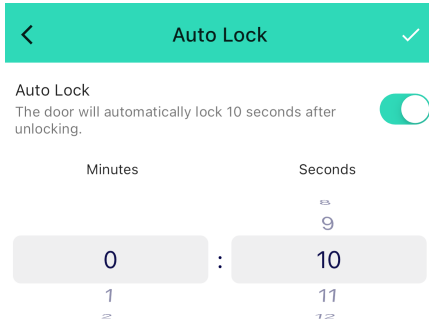

## Important Notes When Auto-Lock is Disabled:

### 1. Loss of Locking Permission After 5 Seconds

If Auto-Lock is disabled, you will lose the ability to lock the door via the \* button 5 seconds after unlocking. To regain locking permissions, you must unlock the door again and press the \* button within 5 seconds to lock it.

### 2. Anti-Lock Mode Restriction

When Auto-Lock is disabled, pressing the lock button on the back panel to activate Anti-Lock Mode will not work 5 seconds after unlocking. Ensure you perform this action within 5 seconds of unlocking if needed.

**Key Reminder.** Always re-unlock the door first to restore locking permissions within the 5-second window.




## App Functions: Temporary Code Management Screen

Temporary Code includes One-Time Code, Time-limited Code and Custom Code. Each type of temporary code can be added up to four.

One-Time Code is a four-digit number randomly generated by the system and is valid for 24 hours and can only be used once before it expires.

Time-Limited Code is a four-digit number randomly generated by the system, requiring the selection of an effective time and an expiration time.

Custom Code can be either randomly generated or user-defined. The custom code length can be 4 to 8 digits. It requires the selection of an effective time and an expiration time and can be set to repeat weekly or monthly. Additionally, the start and end times for each day need to be specified.

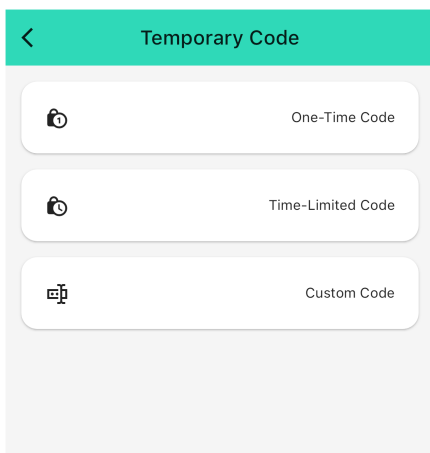




## App Functions: Member Management Screen

By default, there is one administrator who cannot be deleted; up to 11 additional members can be added. Clicking on a member's avatar allows you to delete the member.

Each member supports four unlocking methods: fingerprint, code, card, and fob. A maximum of 5 unlocking methods can be added per member. Please follow the app instructions to add unlocking methods.

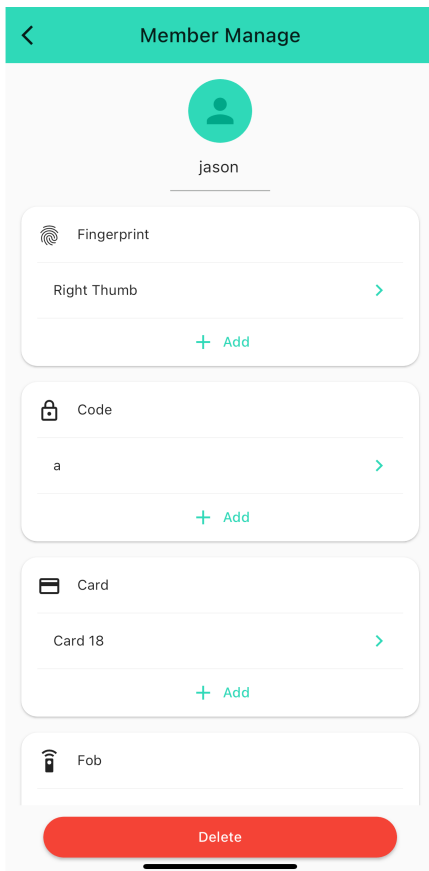



# App Functions: Alarm Strategy Screen

You can set up notifications in Alarm Strategy settings, make sure you have enabled App, Email, SMS notification from the app->Menu->Settings->Account Settings->Advanced Settings, and verified your email address and added your phone number in the app.

The screenshot shows the 'Alarm Strategy' settings screen. The header is green with a back arrow, the title 'Alarm Strategy', and a help icon (?). Below the header, there are several sections: 'Name' with the value 'Always' and a chevron; 'Related Devices' with the value '1' and a chevron; 'Enable Device Alarm' with a toggle switch that is turned on; 'Do Not Disturb' with a toggle switch that is turned off; 'Send App Notification' with a dropdown menu set to 'Admin'; 'Send Email' with a dropdown menu set to 'None'; 'Send SMS' with a dropdown menu set to 'None'; and 'Trigger Action' with a dropdown menu set to 'None'. At the bottom is a green 'Save' button. Annotations with arrows point to the help icon, the 'Always' value, the '1' value, the 'Enable Device Alarm' toggle, and the 'Do Not Disturb' toggle.

**Strategy Name**  
Tap to edit the name

**Related Devices**  
Tap to add more devices (that can alert) to this strategy, a device can be related to only one strategy

**Tap to Enable or Disable The Strategy**

**Tap to Set Up Dnd (Do Not Disturb)**





# App Functions: Alarm Strategy Screen, Continued

The screenshot shows the 'Alarm Strategy' screen with a teal header. The screen contains several settings sections: 'Name' (Always >), 'Related Devices' (1 >), 'Enable Device Alarm' (toggle on), 'Do Not Disturb' (toggle off), 'Send App Notification' (Admin >), 'Notification Settings' (Will send App Notification to the administrator of this home when device alerts), 'Send Email' (None >), 'Send SMS' (None >), and 'Trigger Action' (None >). A teal 'Save' button is at the bottom. Blue arrows point from text boxes on the right to specific settings: 'Send App Notification' to the 'Admin' dropdown, 'Notification Settings (iOS only)' to the 'Notification Settings' link, 'Send Email' to the 'None' dropdown, 'Send SMS' to the 'None' dropdown, and 'Trigger Action' to the 'None' dropdown.

## Send App Notification

Tap to select Admin to enable App push, select All, if desired for all members

## Notification Settings (iOS only)

Tap to change notification tone, if desired

## Send Email

Tap to select Admin to enable email notification, select All, if desired to send to all members

## Send SMS

Tap to select Admin to enable limited text messages, select All (subscribe required-starter or standard plan), if desired to send to all members


## Trigger Action

Tap to choose trigger actions (YoLink sirens, YoLink SpeakerHubs, scene)



## App Functions: Smart - Scene

Go to App Menu->Settings->Account->Advanced Settings->Enable the control of security devices, then you can set up scene for your YoLink Smart Lock (Door Lever).

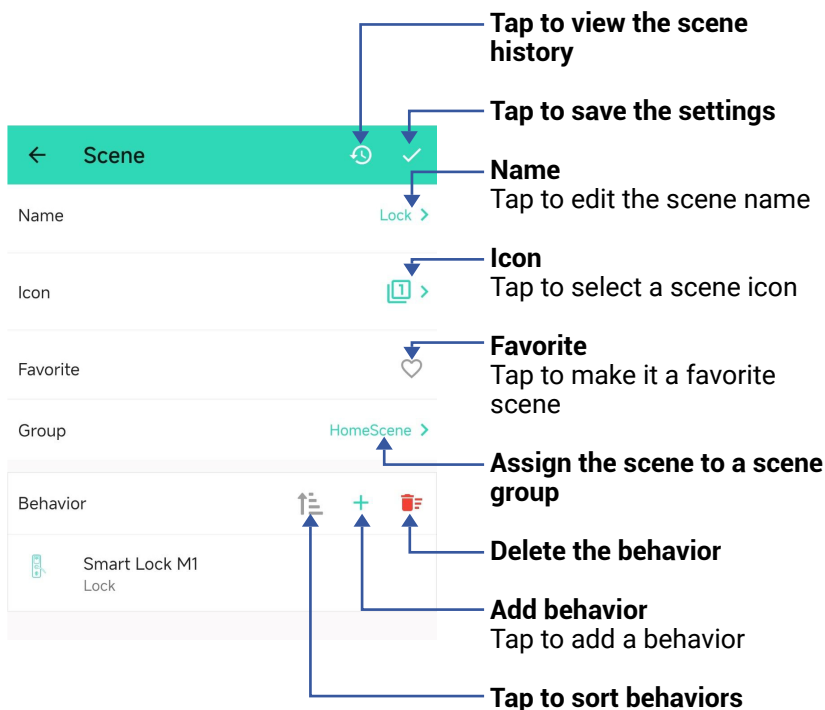

The Scene settings are saved in the cloud.



# App Functions: Smart - Automation

The YoLink Smart Lock can be set up as condition or action in automation. To set up as an action, firstly go to App Menu->Settings->Account->Advanced Settings->Enable the control of security devices.

The screenshot shows the 'Automation' settings screen. At the top is a green header bar with a back arrow, the title 'Automation', and a checkmark icon. Below this is the 'Name' field with the text 'lock the door'. The 'When' section shows a clock icon and the text 'When 23:00 Every Day'. The 'Then' section has a 'Behavior' list with two items: 'Continue if condition is met IF: Door Sensor is Left Open' and 'Smart Lock M1 Lock'. The 'Working Time' section shows 'Always Working'. At the bottom is the 'Advanced Settings' section with a dropdown arrow. Annotations with arrows point to various elements: 'Tap to save the settings' points to the checkmark; 'Edit the name of the automation' points to the 'Name' field; 'Tap to set a condition for the automation' points to the 'When' section; 'Add behavior' points to the plus icon; 'Delete the behavior' points to the trash icon; 'Tap to sort behaviors' points to the sort icon; 'Always Working' points to the 'Working Time' section; and 'Advanced Settings' points to the dropdown arrow.

**Automation**

Name  
lock the door

13/64

When  
When 23:00  
Every Day

Then

Behavior

- Continue if condition is met  
IF: Door Sensor is Left Open
- Smart Lock M1  
Lock

Working Time  
Always Working

Advanced Settings

**Tap to save the settings**

**Edit the name of the automation**

**Tap to set a condition for the automation**

**Add behavior**  
Tap to add a behavior

**Delete the behavior**

**Tap to sort behaviors**

**Always Working**  
Tap to set when the automation can be activated

**Advanced Settings**  
Tap to edit advanced automation and logging settings

The Automation settings are saved in the cloud.

You can edit the Advanced Settings, including save the log, retry if action fails, notify if action fails, etc.


## Control D2D

YoLink Control-D2D is our unique device-to-device control technology. Using YoLink Control-D2D, YoLink devices can be controlled without the Hub or an internet connection. (Use of YoLink Control-D2D is optional; you can use the Automation feature in the app OR use YoLink Control, but YoLink Control-D2D offers the benefit of operation without the Hub or internet connection.) One device controls another directly. A device that sends out commands is called the controller. A device that receives the commands is called the responder. The door lock supports both being a controller and a responder; as a responder, it can be set through the app with a fob, paired in Member Management -> Members -> Fob with the door lock; as a controller, it supports pairing with the YS7103 Siren or YS6803 Plug. When the door is unlocked, the Siren will alarm or the Plug will turn on. You can set this up physically or through the app.


The following instructions use pairing your smart lock with a YoLink Siren physically as an example.

## P Control D2D, Continued

**1.** To configure your Smart Lock as a controller, press and hold the SET button for 5-10 seconds until you hear “Device to Device Pairing Mode,” then release the button.

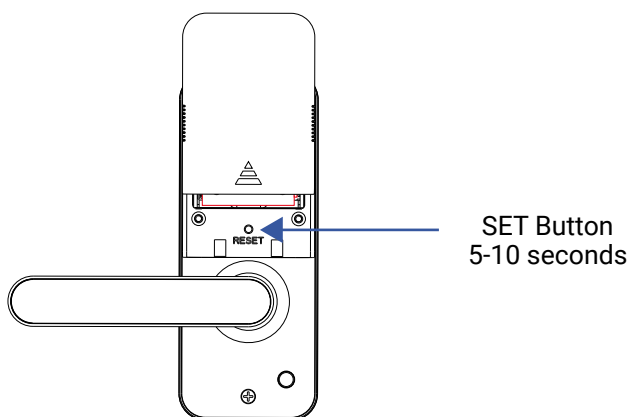

**2.** To configure a Siren as the responder, press and hold the SET button for 5-10 seconds until the LED quickly blinks green, then release the button.

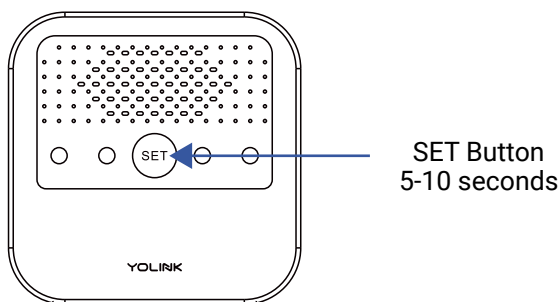

**3.** Upon pairing, the LED will stop blinking (this may happen after only blinking two or three times). When the door is unlocked, the Siren will alarm.



## Control D2D, Continued

### Unpair your Smart Lock:

1. On the Smart Lock, press and hold the SET button for 10 to 15 seconds until you hear “Device to Device Unpairing Mode,” then release the button.
2. On the Siren, press and hold the SET button for 10 to 15 seconds until the LED quickly blinks red, then release the button.



## App & 3rd-Party Services

The YoLink Smart Lock (Door Lever) works with several voice assistants, including Alexa and Google, and it works with other automation platforms such as IFTTT and Home Assistant.


To set up 3rd-party integrations (Alexa, Google and IFTTT), in the app, go to Settings, Third-Party Services, and follow the instructions.

Refer to the Home Assistant website and the YoLink integration page for instructions.


<https://www.home-assistant.io/integrations/yolink/>

## R Battery Replacement

- 1 Push upwards to open the battery cover

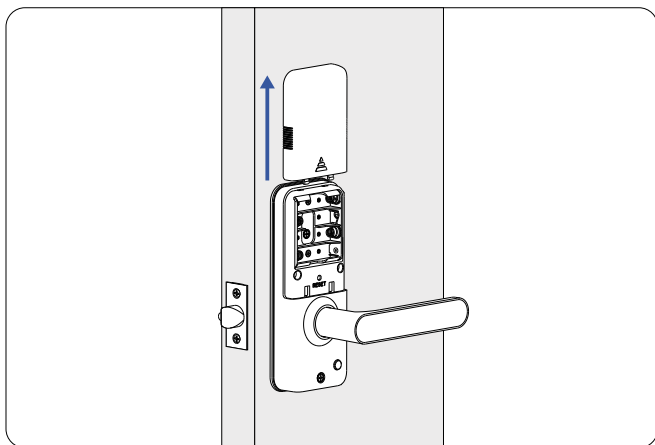


- 2 Install 4 batteries in the battery compartment

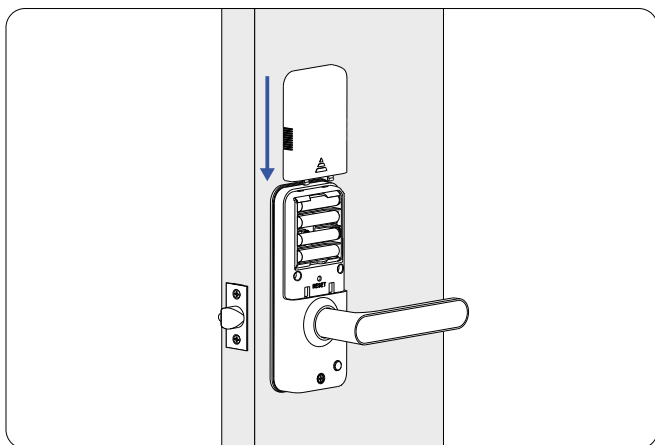

## R Battery Replacement, Continued

### 3 Install the battery cover

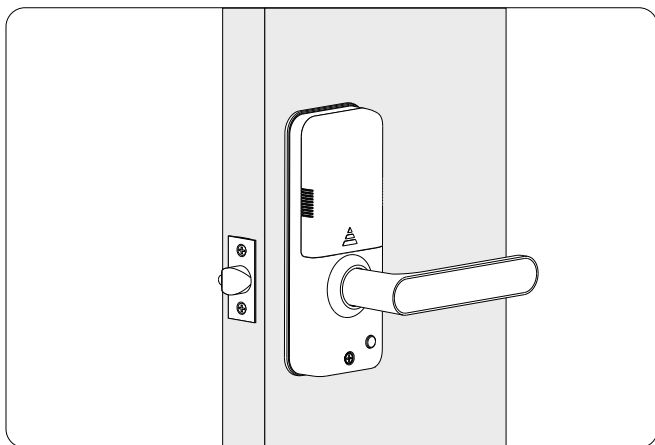




## S Factory Reset

Factory reset will erase device settings and restore it to factory default settings. Doing a factory reset will not remove the device from your account and it will not harm the device, or lose any data or require you to redo your automations, etc.

### Instructions:

Enable the SET physical button function on the device details page. Hold the SET button down for 20-30 seconds, you will hear "Restoring To Factory Defaults". Then, release the button. (Holding the button down longer than 30 seconds will abort the factory reset operation)

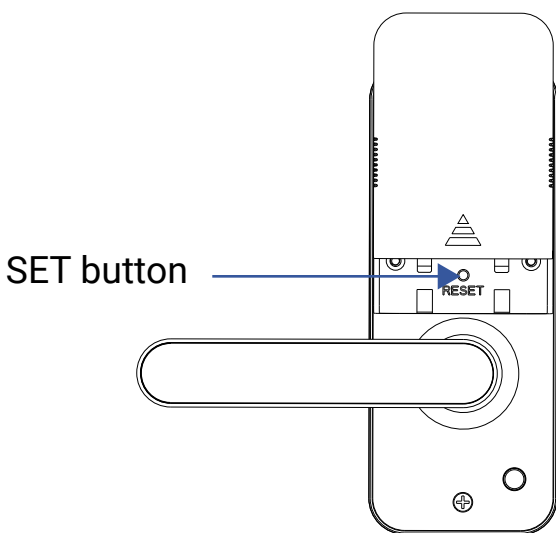


**PLEASE NOTE:** Only deleting a device from the app will remove it from your account. Factory reset will not delete the device from the app.

## T Firmware Update

Your YoLink products are constantly being improved, with new features added. It is periodically necessary to make changes to your device's firmware. For optimal performance of your system, and to give you access to all available features for your devices, these firmware updates should be installed when they become available.

In the Detail screen of each device, at the bottom, you will see the Firmware section, as shown in the image below. A firmware update is available for your device if it says “#### ready now”

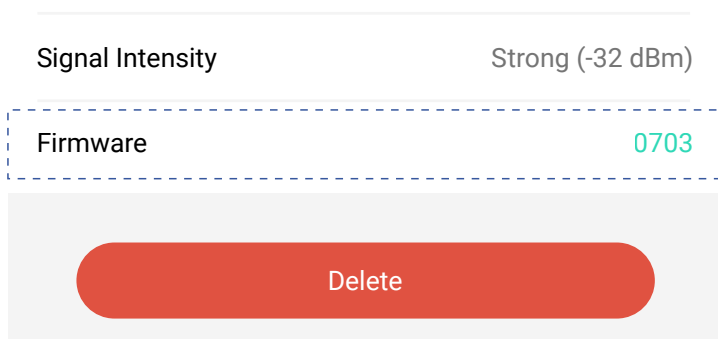

Tap in this area to start the update.

The device will update automatically, indicating progress by percentage-complete. You may use your device during the update, as the update is performed "in the background". The LED will slowly blink green during the update, and the update may continue for several minutes beyond the LED turning off.



## Specifications

|                |                                 |
|----------------|---------------------------------|
| Input Voltage: | 6V DC (4 AA Alkaline Batteries) |
|----------------|---------------------------------|

---

|                    |                |
|--------------------|----------------|
| Low Voltage Alarm: | $4.8 \pm 0.2V$ |
|--------------------|----------------|

---

|                      |                             |
|----------------------|-----------------------------|
| Working Temperature: | -4°F -122°F<br>(-20°C-50°C) |
|----------------------|-----------------------------|

---

|                   |                            |
|-------------------|----------------------------|
| Working Humidity: | $\leq 95\%$ Non-Condensing |
|-------------------|----------------------------|


---

|                      |                            |
|----------------------|----------------------------|
| Backup Power Supply: | USB 5V/1A<br>(Type C Port) |
|----------------------|----------------------------|


---




## Specifications, Continued

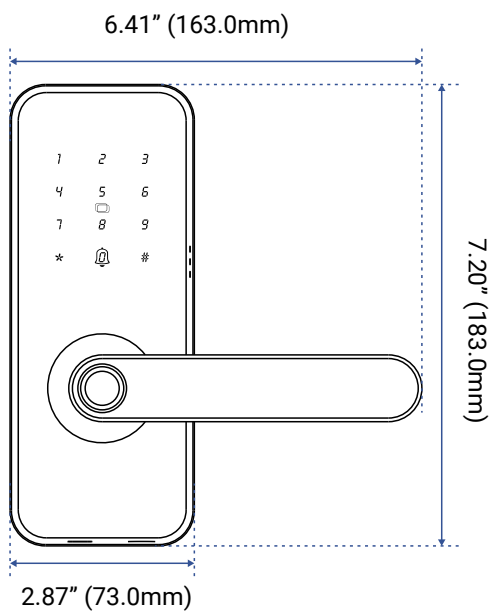


FRONT

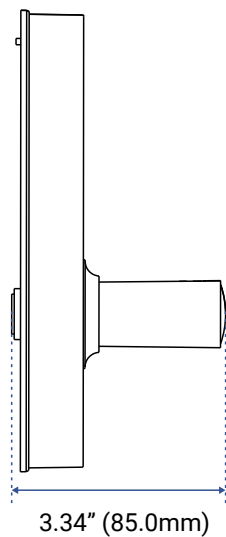

SIDE

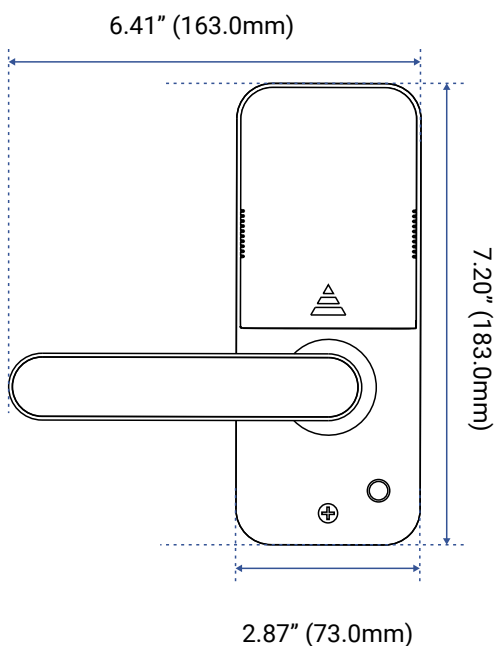

FRONT

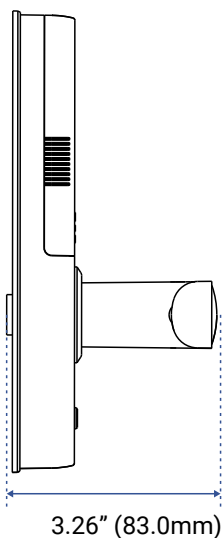

SIDE

## V Warnings

- Please install, operate and maintain the YoLink Smart Lock (Door Lever) only as outlined in this manual. Improper use may damage the unit and/or void the warranty
- Use only new, name brand, alkaline non-rechargeable AA batteries
- Do not use rechargeable batteries
- Do not use zinc blend batteries
- Do not mix new and old batteries
- Do not puncture or damage batteries. Leakage can cause harm on skin contact, and is toxic if ingested
- Do not dispose of batteries in fire as they may explode! Please follow local battery disposal procedures
- Do not install or use the device outside of the temperature and humidity range listed in the Environmental section in Specifications, on page 42
- If your YoLink Smart Lock (Door Lever) gets dirty, please clean it by wiping it down with a clean, dry cloth. Do not use strong chemicals or detergents, which may discolor or damage the exterior and/or damage the electronics, voiding the warranty

## V Warnings, Continued

- Do not install or use this device where it will be subjected to high temperatures and/or open flame
- Do not install or use this device where it will be subjected to physical impacts and/or strong vibration. Physical damage is not covered by the warranty
- To avoid damaging the device, if storing the device for an extended period, remove the batteries
- Please contact Customer Service before attempting to repair, disassemble or modify the device, any of which can void the warranty and permanently damage the device



## Warranty

### **1 Year Limited Electrical Warranty**

YoSmart Inc. warrants to the original user ("customer") of this product that it will be free from defects in materials and workmanship, under normal use, for 1 years from the date of purchase. This warranty does not apply to devices that have been improperly installed, modified, put to a use other than designed, or subjected to acts of God (such as floods, lightning, earthquakes, etc.). This warranty does not cover neglected or abused products. This warranty is limited to the repair or replacement of the device, only, at YoSmart's sole discretion. YoSmart will NOT be liable for the cost of installing, removing, nor reinstalling this product, nor direct, indirect, or consequential damages to persons or property resulting from the use of this product. This warranty only covers the cost of replacement parts or replacement units, it does not cover shipping & handling fees. The customer must provide proof of purchase, in the form of the original purchase invoice or order number. The purchase must have been made from an authorized seller.

To implement this warranty please contact us by one of the methods listed on the Contact Us page of this user guide.

## FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.





## FCC Statement, Continued

- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

PRODUCT NAME:  
YOLINK SMART LOCK (DOOR LEVER)

---

PARTY:  
YOSMART, INC.

---

TELEPHONE:  
831-292-4831

---

MODEL NUMBER:  
YS7617-UC

---

ADDRESS:  
25172 ARCTIC OCEAN DRIVE, SUITE 106, LAKE  
FOREST, CA 92630 USA

---

EMAIL:  
SERVICE@YOSMART.COM

---



## Contact Us

We are here for you, if you ever need any assistance installing, setting up or using a YoLink app or product!

Need help? For fastest service, please email us 24/7 at [service@yosmart.com](mailto:service@yosmart.com)

Or call us at **831-292-4831** (US phone support hours: **Monday - Friday, 9AM to 5PM** Pacific)

You can also find additional support and ways to contact us at:

[www.yosmart.com/support-and-service](http://www.yosmart.com/support-and-service)

Or scan the QR code:



Support Home Page

Finally, if you have any feedback or suggestions for us, please email us at [feedback@yosmart.com](mailto:feedback@yosmart.com)

Thank you for trusting YoLink!

YoLink Customer Support



25172 Arctic Ocean Drive, Suite 106 Lake Forest, CA 92630  
© 2026 YOSMART INC. CALIFORNIA, USA