



X3 Temperature & Humidity Sensor

YS8006-UC



Installation & User Guide

Revision Jun. 11, 2026

Contents

A . Welcome!	01
B . Before You Begin	02
C . In the Box	05
D . Required Items	05
E . Get to Know Your Sensor	06
F . Power Up	07
G . Install the App	08
H . Add Your Sensor to the App	09
I . Installation	11
J . App Functions: Device Screen	15
K . App Functions: Device Details Screen	16
L . App Functions: Alert Settings Screen	18
M . App Functions: Chart Screen	19
N . App Functions: Alarm Strategy Screen	20
O . App Functions: Automation	22
P . Sensor Calibration	23
Q . Sensor Refresh Frequency	25
R . 3rd-party Services	26
S . Battery Replacement	28
T . Specifications	30
U . Factory Reset	33
V . Firmware Updates	34
W . Troubleshooting	36
X . Warnings	38
Y . Warranty	40
Z . FCC Statement	41
AA. Contact Us	43



Welcome!

Thank you for purchasing YoLink products! We appreciate you trusting YoLink for your smart home & automation needs. Your 100% satisfaction is our goal. If you experience any problems with your installation, with our products or if you have any questions that this manual does not answer, please contact us right away. See the Contact Us section for more info.

Thank you!

YoLink Customer Support

User Guide Conventions

The following icons are used in this guide to convey specific types of information:



Very important information
(can save you time!)



Good to know info but may not
apply to you

B Before You Begin

Visit our X3 Temperature & Humidity Sensor support page on our website, for the latest installation guides, additional resources, information and videos by visiting:

<https://www.yosmart.com/support/YS8006-UC>

Or by scanning the QR code:



Download the most current version of the user guide by scanning the QR code:



B Before You Begin, Continued

The YoLink X3 Temperature & Humidity Sensor is a smart wireless combination thermometer and hygrometer. By monitoring the real-time temperature and humidity levels at the sensor location, it can provide you with the current conditions as well as alert you to off-normal conditions.

For full functionality, your smart X3 Temperature & Humidity Sensor connects to the internet by connecting wirelessly to one of our hubs (original YoLink Hub or the SpeakerHub), not via WiFi or other wireless methods. If you do not already have a YoLink hub, and unless there is an existing YoLink wireless network in your building (for example, an apartment complex or condominium building), please purchase and set up your hub before proceeding with the installation of your new sensor.

The X3 Temperature & Humidity Sensor has onboard memory capable of storing over 5000 events. If your sensor loses its connection to the internet, it is capable of storing and later uploading recorded events to the cloud (making them available to you via the app, for viewing and exporting, etc.). For example, if set for 1-minute intervals, the sensor can store at least 30 days of sensor data. Recording intervals are set in the app (see page 16).

B Before You Begin, Continued




Your X3 Temperature & Humidity Sensor connects to the internet via a YoLink hub, and it does not connect directly to your WiFi or local network. In order for remote access to the device from the app, and for full functionality, a hub is required. This guide assumes the YoLink app has been installed on your smartphone, and a YoLink hub is installed and online (or your location, apartment, condo, etcetera, is already served by a YoLink wireless network).




To provide years between battery changes, your sensor refreshes at least once an hour or more frequently if the SET button is pressed or if the temperature or humidity change meets refresh criteria as explained in the user guide.


C In the Box



X3 Temperature & Humidity
Sensor




2 x AA Batteries (Installed)




Quick Start Guide

D Required Items


You may require these items:



Small and/or Medium Phillips
Screwdriver



Hammer





Nail or Self Tapping Screws



Double-sided Mounting Tape or
Velco

E

Get to Know Your Sensor

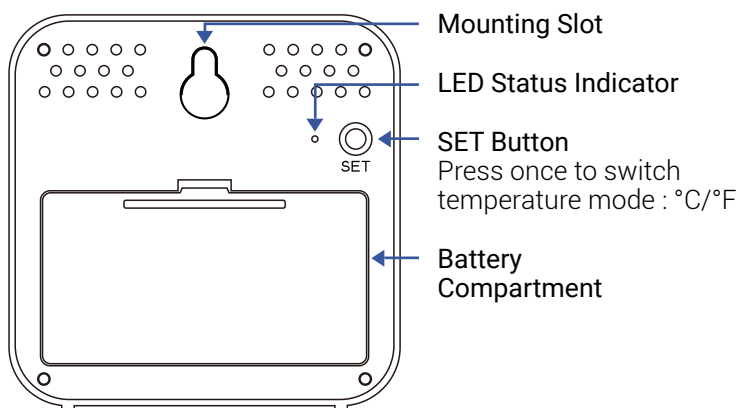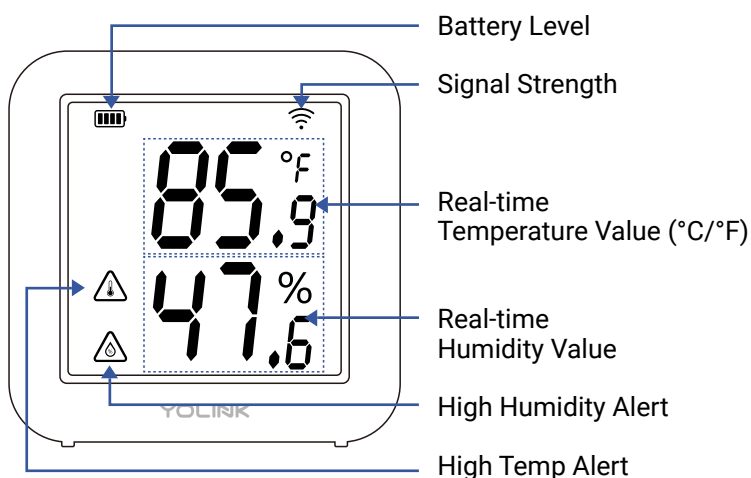

LED Behaviors



Blinking Red Once, then Green Once
Device turned on



Blinking Red And Green Alternately
Restoring to Factory Defaults



Blinking Green Once
Switching temperature mode



Blinking Green
Connecting to Cloud



Slow Blinking Green
Updating




Blinking Red Once
Device alerts



Fast Blinking Red Every 30 Seconds or Fast Blinking Red 5 Times when pressing the SET Button
Batteries are Low, Please Replace the Batteries

F Power Up

Before you can use your X3 Temperature & Humidity Sensor, it must be turned on. (Batteries have been pre-installed.) Press the SET button briefly, until the LED flashes red then green (which indicates it has turned on and connected to a hub and the cloud).

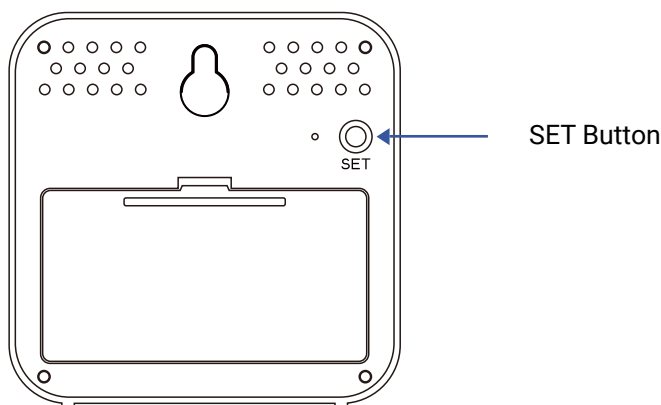



Install the App

If you are new to YoLink, please install the app on your phone or tablet, if you have not already. Otherwise, please proceed to the next section.

Scan the appropriate QR code below or find the “YoLink app” on the appropriate app store.



Apple phone/tablet
iOS 9.0 or higher



Android phone/tablet
6.0 or higher

Open the app and tap **Sign up for an account**. You will be required to provide a username and a password. Follow the instructions, to set up a new account. Allow notifications, when prompted.


You will immediately receive a welcome email from no-reply@yosmart.com with some helpful information. Please mark the yosmart.com domain as safe, to ensure you receive important messages in the future.

Log in to the app using your new username and password.


The app opens to the **Favorite** screen. This is where your favorite devices and scenes will be shown. You can organize your devices by room, in the **Rooms** screen, later.

H Add Your Sensor to the App

1. Tap **Add Device** (if shown) or tap the scanner icon:

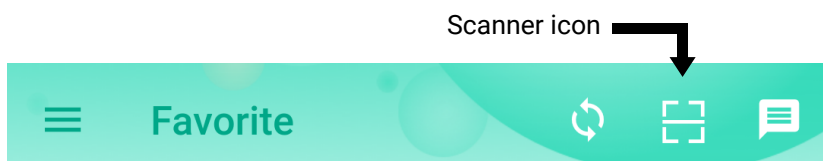

2. Approve access to your phone's camera, if requested. A viewfinder will be shown on the app.

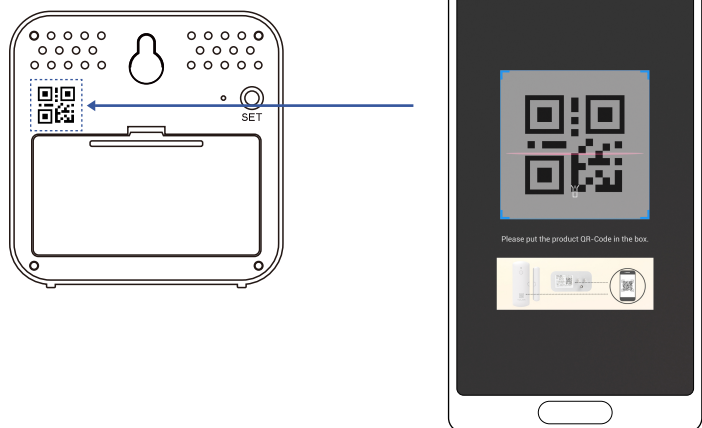


3. Hold the phone over the QR code so that the code appears in the viewfinder. If successful, the **Add Device** screen will be displayed.



Add Your Sensor to the App, Continued

4. You can change the device name and assign it to a room later. Tap **Bind device**.

5. If successful, the screen will appear as shown. Tap **Done**.

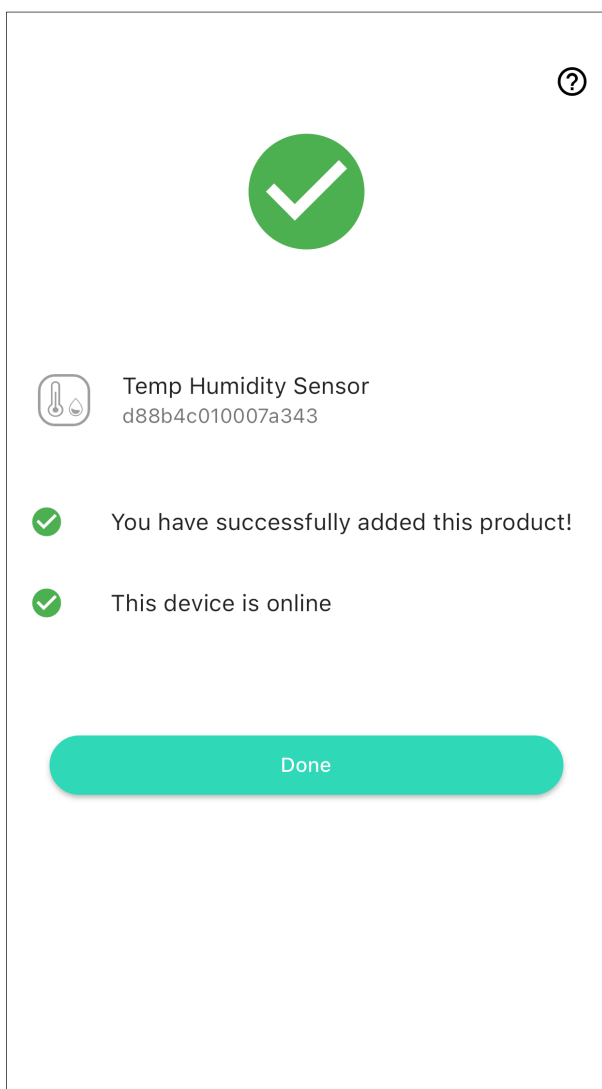



Installation

Environment Considerations:

Determine an appropriate location for your sensor.



Please note: the X3 Temperature & Humidity Sensor is intended for indoor use, at dry locations. Refer to the product support page for the full environmental specifications.

- Consider our Weatherproof Temperature & Humidity Sensor for outdoor locations.
- If you plan to use this sensor in a freezer, ensure the sensor does not get wet during defrosting cycles.



Installation, Continued

Location Considerations:

If placing the sensor on a shelf or countertop, ensure it is a stable surface. If hanging or mounting the sensor on a wall, ensure the mounting method is secure, and the location does not subject the sensor to physical damage. The warranty does not cover physical damage.

- ▶ Do not place the sensor where it may get wet
 - Do not place the sensor where it will be
- ▶ subjected to direct sunlight
- Avoid placing the sensor near HVAC grilles
- ▶ or diffusers



Installation, Continued

Install the Sensor.

1. Before installing or placing your sensor, ensure the display mode is correct for your application. To switch between Celsius and Fahrenheit display mode, briefly press the SET button (on the rear of the sensor).

2. If placing the sensor on a shelf or countertop or other stable service, place the sensor where desired, then proceed to proceed to step 5.

3. Before mounting or hanging the sensor on the wall or vertical surface, determine your desired method:

- Hang the sensor from a nail or screw or small hook.
- Hang or mount the sensor by other methods, such as 3M brand Command hooks.


Secure the sensor to the wall using

- mounting tape, Velcro or similar methods. If affixing something to the rear of the sensor, be aware of the impact of covering the SET button or LED, and allow for battery replacement in the future.



Installation, Continued

- 4.** Mount or hang the sensor on the wall or vertical surface using your desired method. (Insert a screw into the wall, hammer a nail into the wall, etc.)

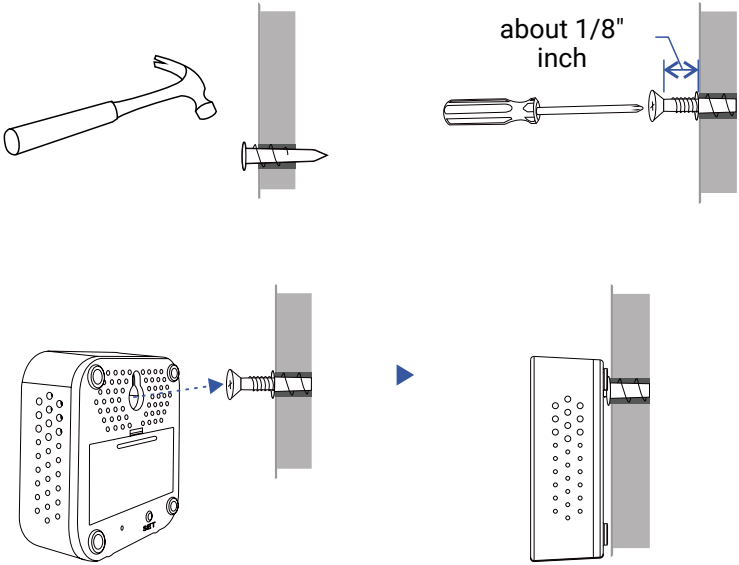


- 5.** Allow your sensor at least one hour to stabilize and report the correct temperature and humidity to the app. Refer to the full installation & user guide for instructions on calibrating your sensor, if it does not appear to indicate the correct temperature and/or humidity.



App Functions: Device Screen

In the app, tap on your X3 Temperature & Humidity Sensor icon. Your X3 Temperature & Humidity Sensor main screen should be similar to the one shown below.

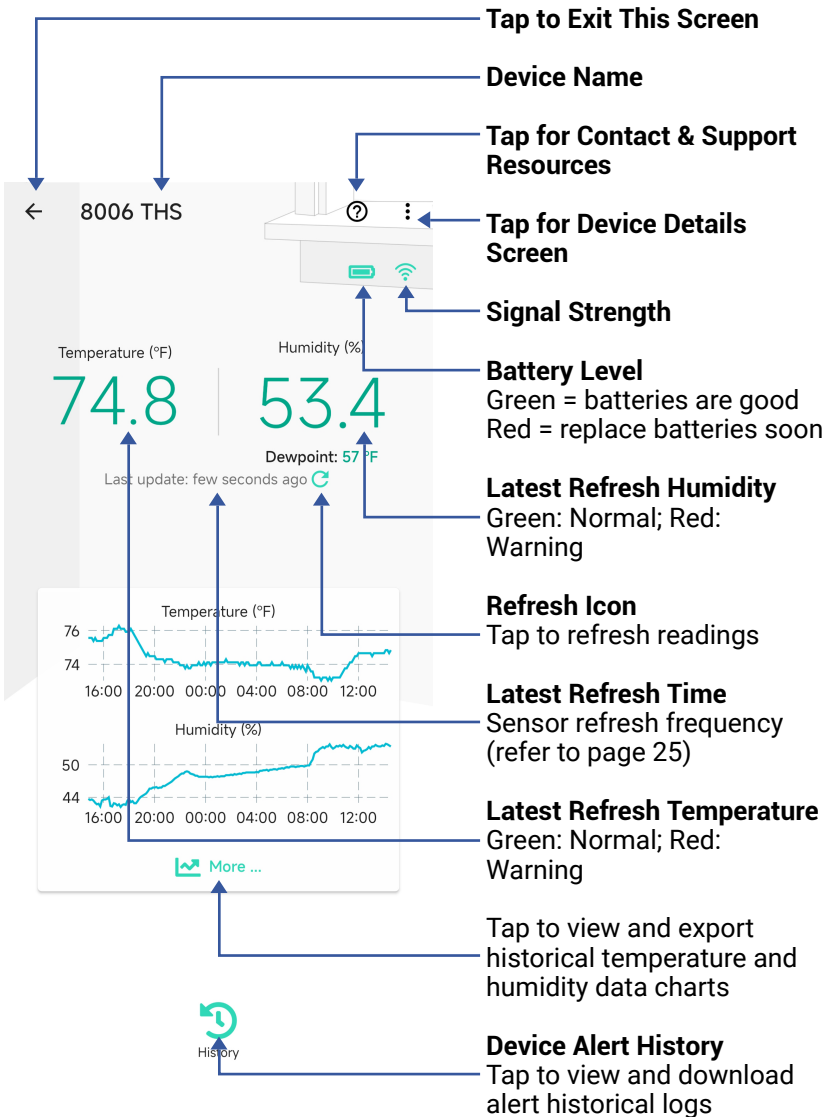



App Functions: Device Details Screen

Tap the three dots (in the upper right corner) to open the X3 Temperature & Humidity Sensor **Details** screen. Your X3 Temperature & Humidity Sensor screen should be similar to the one shown below.

<

Details

?

Type

Temp Humidity Sensor

Name

8006 THS >

Room

Not Set >

Alert

>

Calibration

Device parameter calibration >

Temperature Unit

Fahrenheit(°F) ▾

Recording Interval

10 minutes >

Favorite

Will show in favorite screen

History

Get device logs >

State

Normal

Other

Model

YS8006-UC

Device EUI

d88b4c010004df18

SN

8DE1CC71BF >

Signal Intensity

Strong (-11 dBm) >

Battery

 >

Firmware

0602
060E ready now.

Delete

Device Type

Device Name
(Tap to Edit)

Room
(Tap to Edit)

Alert
Tap to edit Alert Settings
(see Alert Settings Screen)

Calibration
Tap to calibrate the sensor
(see page 23)

Temperature Unit
Switch temperature display
mode: °F / °C

Recording Interval
Sampling frequency.
Standard device offers
range from 10 to 60
minutes. For more frequent
sampling options, consider
subscribing to our Standard
Plan.

Favorite
(Red if Favorite, Tap to Edit)

History
Tap to view device history

State
General status of the device
(Normal, Offline, Warning,
etc.)



App Functions: Device Details Screen, Continued

Details

Type

Temp Humidity Sensor

Name

8006 THS >

Room

Not Set >

Alert

>

Calibration

Device parameter calibration >

Temperature Unit

Fahrenheit(°F) ▾

Recording Interval

10 minutes >

Favorite

Will show in favorite screen

History

Get device logs >

State

Normal

Other

Model

YS8006-UC

Device EUI

d88b4c010004df18

SN

8DE1CC71BF >

Signal Intensity

Strong (-11 dBm) >

Battery

 >

Firmware

0602
060E ready now.

Delete

Model Number

Device EUI
Unique Identifier Number

Device Serial Number

Signal Intensity
(From YoLink Hub)


Battery Level Indicator
If red, batteries are low;
replace batteries soon.

Firmware Revision
(Refer to page 34)

**Remove Device From
Current Account**
Tap to delete the device
from your YoLink account



App Functions: Alert Settings Screen

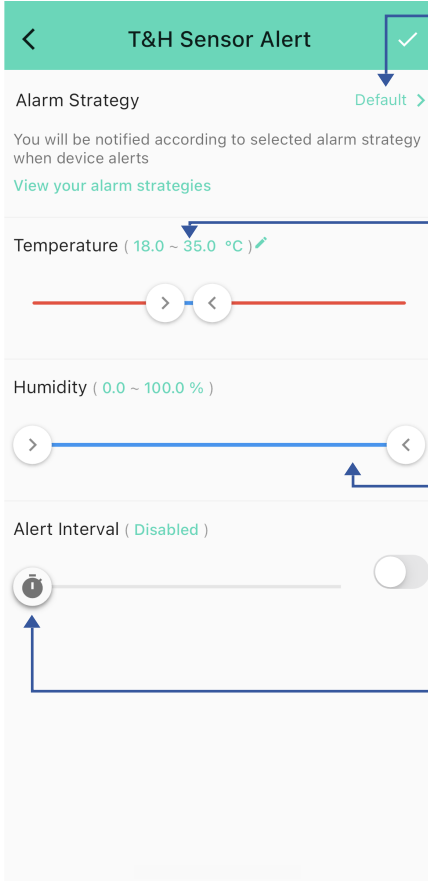

Alarm Strategy

Tap to edit the sensor's Alarm Strategy

Tap here to open the digital temperature alert settings


Tap the slider control and adjust the high or low alert value. The "normal" range will be displayed in blue text as a low alert value, to the high alert value.

Alert interval

Choose how often you want to be reminded after an alert.



App Functions: Chart Screen

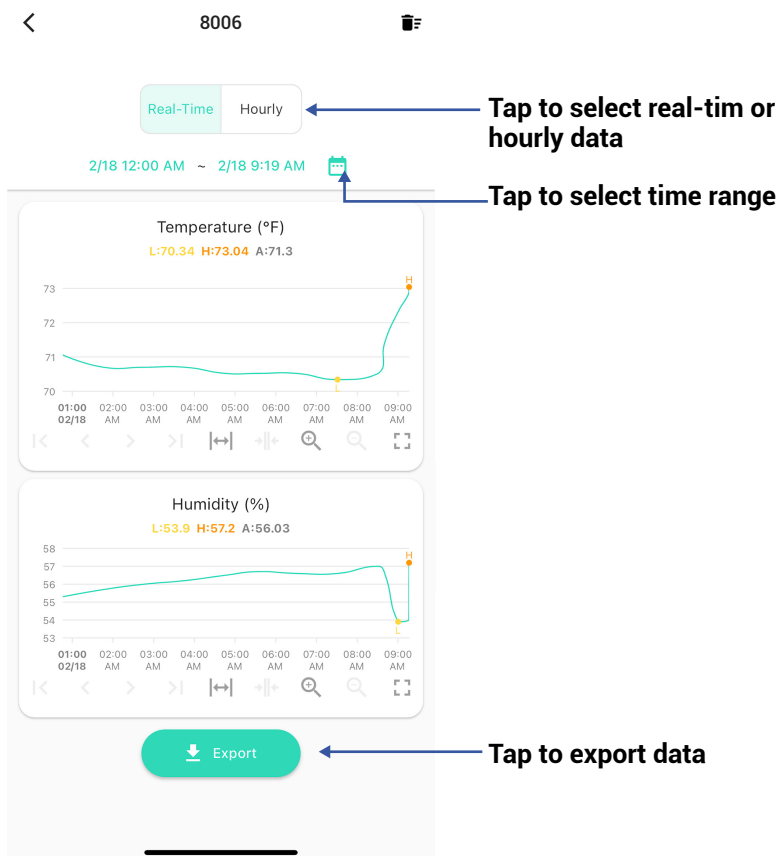



App Functions: Alarm Strategy Screen

You can set up notifications in Alarm Strategy settings, make sure you have enabled App, Email, SMS notification from the app->Menu->Settings->Account Settings->Advanced Settings, and verified your email address and added your phone number in the app.

The screenshot shows the 'Alarm Strategy' settings screen. The header is green with a back arrow, the title 'Alarm Strategy', and a help icon. Below the header, there are several settings sections. The first section has 'Name' set to 'Always' with a right arrow, and 'Related Devices' set to '1' with a right arrow. The second section has 'Enable Device Alarm' with a green toggle switch, and 'Do Not Disturb' with a grey toggle switch. The third section has 'Send App Notification' set to 'Admin' with a dropdown arrow, a 'Notification Settings ...' link, and a description. The fourth section has 'Send Email' set to 'None' with a dropdown arrow, and a description. The fifth section has 'Send SMS' set to 'None' with a dropdown arrow, and a description. The sixth section has 'Trigger Action' set to 'None' with a right arrow, and a description. At the bottom is a green 'Save' button. Annotations with arrows point to the help icon, the 'Always' text, the '1' text, the 'Enable Device Alarm' toggle, and the 'Do Not Disturb' toggle.

Strategy Name
Tap to edit the name

Related Devices
Tap to add more devices (that can alert) to this strategy, a device can be related to only one strategy

Tap to enable or disable the strategy

Tap to set up DND (Do Not Disturb)



App Functions: Alarm Strategy Screen, Continued

The screenshot shows the 'Alarm Strategy' screen with a teal header. Below the header, there are several settings sections. The 'Name' section has a value of 'Always' with a right arrow. The 'Related Devices' section has a value of '1' with a right arrow. The 'Enable Device Alarm' section has a toggle switch that is turned on. The 'Do Not Disturb' section has a toggle switch that is turned off. The 'Send App Notification' section has a dropdown menu set to 'Admin'. Below this is a link for 'Notification Settings' with a description: 'Will send App Notification to the administrator of this home when device alerts'. The 'Send Email' section has a dropdown menu set to 'None' and a description: 'Will not send Email when device alerts'. The 'Send SMS' section has a dropdown menu set to 'None' and a description: 'Will not send SMS when device alerts'. The 'Trigger Action' section has a dropdown menu set to 'None' and a description: 'Have not set any action'. At the bottom is a large teal 'Save' button. Blue arrows point from text boxes on the right to specific elements: 'Send App Notification' points to the 'Admin' dropdown; 'Notification Settings (iOS only)' points to the 'Notification Settings' link; 'Send Email' points to the 'None' dropdown; 'Send SMS' points to the 'None' dropdown; and 'Trigger Action' points to the 'None' dropdown.

Send App Notification

Tap to select Admin to enable App push, select All, if desired for all members

Notification Settings (iOS only)

Tap to change notification tone, if desired

Send Email

Tap to select Admin to enable email notification, select All, if desired to send to all members

Send SMS

Tap to select Admin to enable limited text messages, select All (subscribe required-starter or standard plan), if desired to send to all members

Trigger Action

Tap to choose trigger actions (YoLink sirens, YoLink SpeakerHubs, scene)



App Functions: Automation

The X3 Temperature & Humidity Sensor can be set up as a condition in an automation. For example, you can automatically turn on a fan if the sensor detects a high temperature. This example is shown below. The automation also sends a custom notification (via app push notification, email SMS, or SpeakerHub broadcast) reminding you the sensor detects high or low temperature or humidity.

Automation

Name

High temp turn on fan

21/64

When

Temp Humidity Sensor

High temperature alert

Then

Behavior

Fan

Turn ON

Working Time

Always Working

Delete

Sensor Calibration


Your X3 Temperature & Humidity Sensor has a high-accuracy digital sensor that has been calibrated at the time of manufacture. Your sensor readings should always be accurate, but if you believe the sensor is not accurate and/or if you have a thermometer or trusted sensor, etc. that displays a different reading, you can adjust the humidity and temperature readings with a plus or minus offset of your choice. For example, if a calibrated or trusted thermometer reads 0.5 degrees higher than your sensor, you can adjust, or calibrate, the sensor reading to be 0.5 degrees higher than it normally displays.



Sensor Calibration, Continued

How to Calibrate Your Sensor:

1. Open the sensor's **Details** screen and tap Calibration.
2. The Calibration screen is displayed, as shown below. To calibrate the temperature or humidity, tap and hold the associated slider bar control, then slide the control to the right, for a positive offset, or to the left, for a negative offset. The offset will be displayed with a "+" or "-" number. For example, to adjust the humidity plus 1.5 percent, tap and hold the Humidity control, and slide it slowly to the right, until "+1.5%" is displayed.

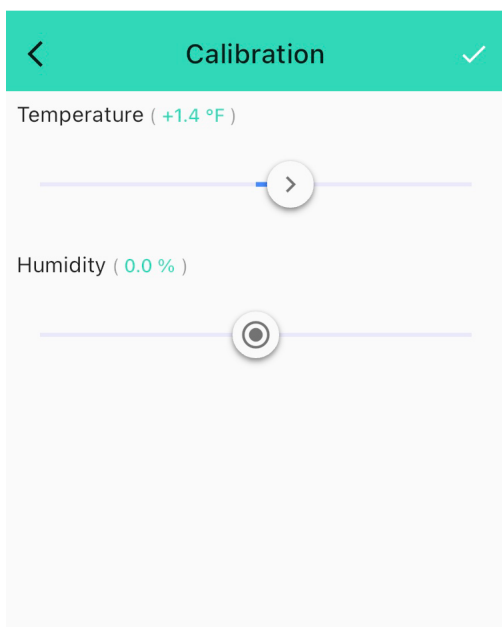


3. Tap the checkmark, to save your settings.



Sensor Refresh Frequency

Both temperature and humidity values refresh when one of the following conditions are met:



SET Button

a. The SET button has been pressed



b. At least 9°F(5°C) change over a period longer than 1 minute



c. At least a 10% change over a period longer than 1 minute



d. Device alert level reached or restored to normal range



e. Refresh icon on Device screen is tapped

f. Otherwise, the values will be refreshed in each recording interval

3rd-Party Services

The YoLink Temperature & Humidity Sensor works with several voice assistants, including Alexa and Google, and it works with other automation platforms such as IFTTT.

To set up voice assistant integrations, in the app, go to Settings, Third-Party Services, and follow the instructions.

Please note, IFTTT supports Temperature & Humidity Sensor as a trigger action (High Temp, Low Temp, High Humidity, or Low Humidity) in the routine.

Alexa now includes the capability to query the temperature of a device and utilizes the Temperature & Humidity Sensor for initiating trigger actions, based on high or low temperature (note that humidity-triggered actions are not supported).

Notably, in the Alexa interface, these temperature conditions are represented as motion sensors. For instance, when setting up a routine in Alexa, you can select "Sunroom Temp Humidity | High Temperature - Motion Detected" as the condition under the "when" section to initiate the routine.



3rd-Party Services, Continued


Google only supports querying the temperature or humidity of the devices.

For example, edit the name of the device in Alexa or Google to "Sunroom", then you can ask: "Echo, what is the sunroom temperature?"


You can also try, "Alexa, what is the temperature of the Sunroom sensor?"

S Battery Replacement

- 1 Remove the battery cover by gently prying with your fingertip or tool at the edge as shown

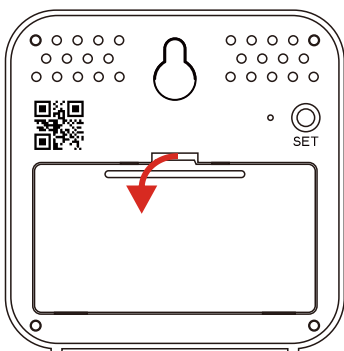


- 2 Remove the old batteries

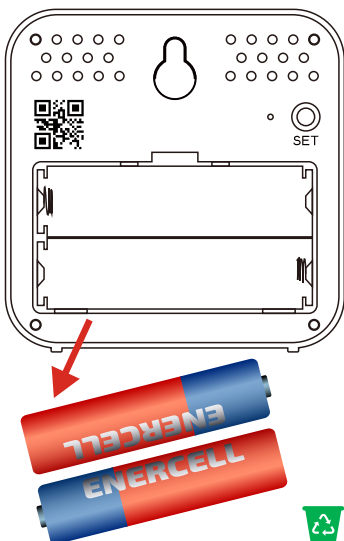


S Battery Replacement, Continued

- 3 Install two new lithium non-rechargeable AA batteries, and then close the battery cover

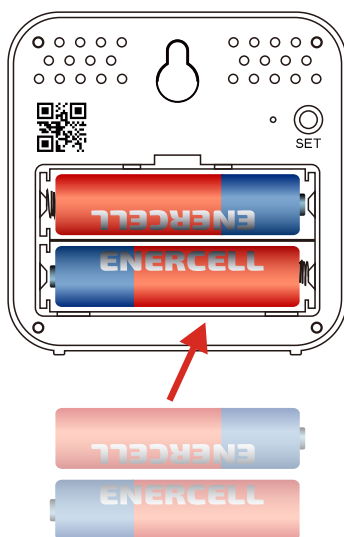

- 4 Close the battery cover

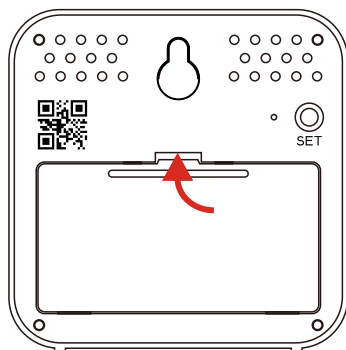



Specifications

Voltage:	3V DC (Lithium AA Non-Rechargeable x 2)
----------	--

Device Current Draw:	$\leq 140\text{mA}$ (operating) $\leq 150\text{uA}$ (standby)
----------------------	--

Sensor Types:	Temperature, Humidity
---------------	-----------------------

Temperature Value Accuracy:	0.1 ($^{\circ}\text{F}/^{\circ}\text{C}$)
--------------------------------	---

Humidity Value Accuracy:	0.1%
-----------------------------	------

Dimensions, Imperial (L x W x D):	2.70 x 2.70 x 0.94 inches
--------------------------------------	------------------------------

Dimensions, Metric (L x W x D):	68.5 x 68.5 x 24 mm
------------------------------------	---------------------

T Specifications, Continued

Environment:	Working Temperature: -22°F-140°F (-30°C-60°C) Working Humidity: ≤ 95% (non-condensing)
--------------	---

Temperature Error (Typical)	-22°F-14°F, ±0.9°F (-30°C-10°C, ±0.5°C) 14°F-32°F, ±0.54°F (-10°C-0°C, ±0.3°C) 32°F-140°F, ±0.36°F (0°C-60°C, ±0.2°C)
--------------------------------	--

Temperature Error (Maximum)	-22°F-14°F, ±1.44°F (-30°C-10°C, ±0.8°C) 14°F-32°F, ±0.9°F (-10°C-0°C, ±0.5°C) 32°F-140°F, ±0.72°F (0°C-60°C, ±0.4°C)
--------------------------------	--


Humidity Error (Typical, @77°F (@25°C))	0%-10%/90%-100%, ±3% 10%-90%, ±2%
---	---

Humidity Error (Maximum, @77°F (@25°C))	0%-10%/90%-100%, ±5% 10%-90%, ±3.5%
---	---




Specifications, Continued

2.70" (68.5mm)




FRONT

0.94" (24mm)



SIDE

2.70" (68.5mm)




TOP



Factory Reset

When directed by customer support, and/or as an attempt to resolve a problem with your X3 Temperature & Humidity Sensor, it may be necessary to perform a factory reset. Factory resetting your sensor returns it to the factory default programming and settings. This is a simple process:

Hold the SET Button for 20 to 30 seconds, until the LED blinks red and green alternately, then release the button.



SET Button

Press for 20 to 30 Seconds

Factory reset is complete when the LED stops flashing.



Only deleting a device from the app will remove it from your account



Firmware Updates

Your YoLink products are frequently being improved, with new features and functions added over time. It is periodically necessary to make changes to your device firmware. For optimal performance of your device, and to give you access to any improvements made to your device model, these firmware updates should be installed (added to your device) when they become available.

In the **Details** screen of your device, you will see the Firmware section, as shown in the image below. A firmware update is available if it says “#### ready now” (where #### is a four-digit combination of letters and/or numbers).

Signal Intensity

Strong (-32 dBm)

Firmware

0703

Delete



Firmware Updates, Continued

Firmware is like settings in your sensor that define the overall operations of the sensor. These settings are added to the sensor when it is manufactured, and they are periodically updated, as needed, to add improvements, new features, new integrations, etc, to your sensor, as they become available.

Tap in the Firmware area to start the update. The sensor will update automatically, indicating the progress by percentage-complete. You may use your sensor during the update process, as the update is performed “in the background”. You may see the LED slowly blink green during the update, and the update may continue for several minutes beyond the LED turning off.



If you experience incomplete firmware updates, please update only one device at a time. If this does not resolve the problem, please contact our customer support department!



Troubleshooting

Problem:

Sensor is offline or has a low signal status.

Possible Solution:

a) Signal strength for the sensor is too low at that location. Move the sensor closer to the hub, relocate the hub closer to the sensor (if possible), or add another hub (to extend the signal range).

b) If offline, confirm the hub is powered on and connected to the internet. Otherwise, move sensor and/or hub or add a hub.

Problem:

Sensor displays temperature in F when C is needed or vice versa.

Solution:

Press the SET button briefly to toggle the display mode between C and F.

Problem:

Sensor temperature or humidity is not accurate, compared to another sensor

Possible Solution:

Your X3 Temperature & Humidity Sensor does have a Calibration feature, that allows for adjusting the displayed temperature or humidity, to match that of a trusted temperature or humidity measuring device or method. See the Calibration section on page 23.

W Troubleshooting, Continued

If this does not resolve the issue, please contact our customer support department (see the contact info on the last page of this guide).



We recommend checking for and performing any available firmware updates before contacting customer support. See Firmware Updates, page 34.



Warnings

Please install, operate and maintain the X3 Temperature & Humidity Sensor only as outlined in this manual. Improper use may damage the unit and/or void the warranty

Use only new, name brand, lithium non-rechargeable AA batteries

Do not use rechargeable batteries

Do not use zinc blend batteries

Do not mix new and old batteries

Do not puncture or damage batteries. Leakage can cause harm on skin contact, and is toxic if ingested

Do not dispose of batteries in fire as they may explode! Please follow local battery disposal procedures

To avoid damaging the device, if storing the device for an extended period, remove the batteries

Refer to Specifications (page 31) for the device environmental limitations.

Do not obstruct the openings on the housing, as they are used for temperature and humidity sensing

Do not install or use this device where it will be subjected to high temperatures and/or open flame



Warnings, Continued

This device is not waterproof and is designed and intended only for indoor use.

Subjecting this device to outdoor environment conditions such as direct sunlight, extreme hot or cold temperatures, rain, water and/or condensation can damage the device and will void the warranty

Install or use this device only in clean environments.

Dusty or dirty environments may prevent the proper operation of this device, and will void the warranty

If your Temperature & Humidity Sensor does get dirty, please clean it by wiping it down with a clean, dry cloth.

Do not use strong chemicals or detergents, which may discolor or damage the exterior and/or damage the electronics, voiding the warranty

Do not install or use this device where it will be subjected to physical impacts and/or strong vibration. Physical damage is not covered by the warranty

Please contact Customer Service before attempting to repair disassemble or modify the device, any of which can void the warranty and permanently damage the device

2 Year Limited Electrical Warranty

YoSmart Inc. warrants to the original user (“customer”) of this product that it will be free from defects in materials and workmanship, under normal use, for 2 years from the date of purchase. This warranty does not apply to devices that have been improperly installed, modified, put to a use other than designed, or subjected to acts of God (such as floods, lightning, earthquakes, etc.). This warranty does not cover neglected or abused products. This warranty is limited to the repair or replacement of the device, only, at YoSmart's sole discretion. YoSmart will NOT be liable for the cost of installing, removing, nor reinstalling this product, nor direct, indirect, or consequential damages to persons or property resulting from the use of this product. This warranty only covers the cost of replacement parts or replacement units, it does not cover shipping & handling fees. The customer must provide proof of purchase, in the form of the original purchase invoice or order number. The purchase must have been made from an authorized seller.

To implement this warranty please contact us by one of the methods listed on the Contact Us page of this user guide.

Z FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Z FCC Statement, Continued

- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

PRODUCT NAME:
X3 TEMPERATURE & HUMIDITY SENSOR

PARTY:
YOSMART, INC.

TELEPHONE:
831-292-4831

MODEL NUMBER:
YS8006-UC

ADDRESS:
25172 ARCTIC OCEAN DRIVE, SUITE 106, LAKE
FOREST, CA 92630 USA

EMAIL:
SERVICE@YOSMART.COM



Contact Us

We are here for you, if you ever need any assistance installing, setting up or using a YoLink app or product!

Need help? For fastest service, please email us 24/7 at service@yosmart.com

Or call us at **831-292-4831** (US phone support hours: **Monday - Friday, 9AM to 5PM** Pacific)

You can also find additional support and ways to contact us at:

www.yosmart.com/support-and-service

Or scan the QR code:



Support Home Page

Finally, if you have any feedback or suggestions for us, please email us at feedback@yosmart.com

Thank you for trusting YoLink!

YoLink Customer Support

YOLINK

25172 Arctic Ocean Drive, Suite 106 Lake Forest, CA 92630
© 2026 YOSMART INC. CALIFORNIA, USA