

BULLDOG VALVE ROBOT

Motorized Ball Valve Controller



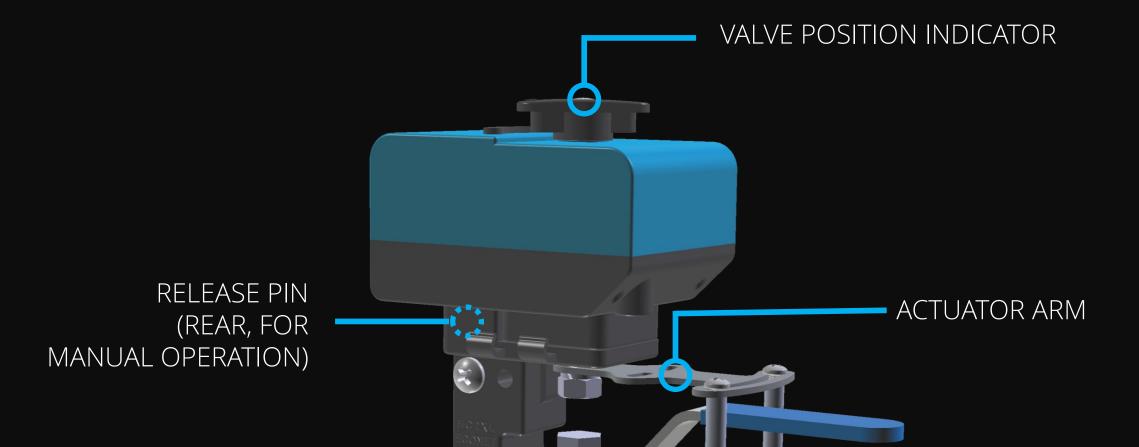

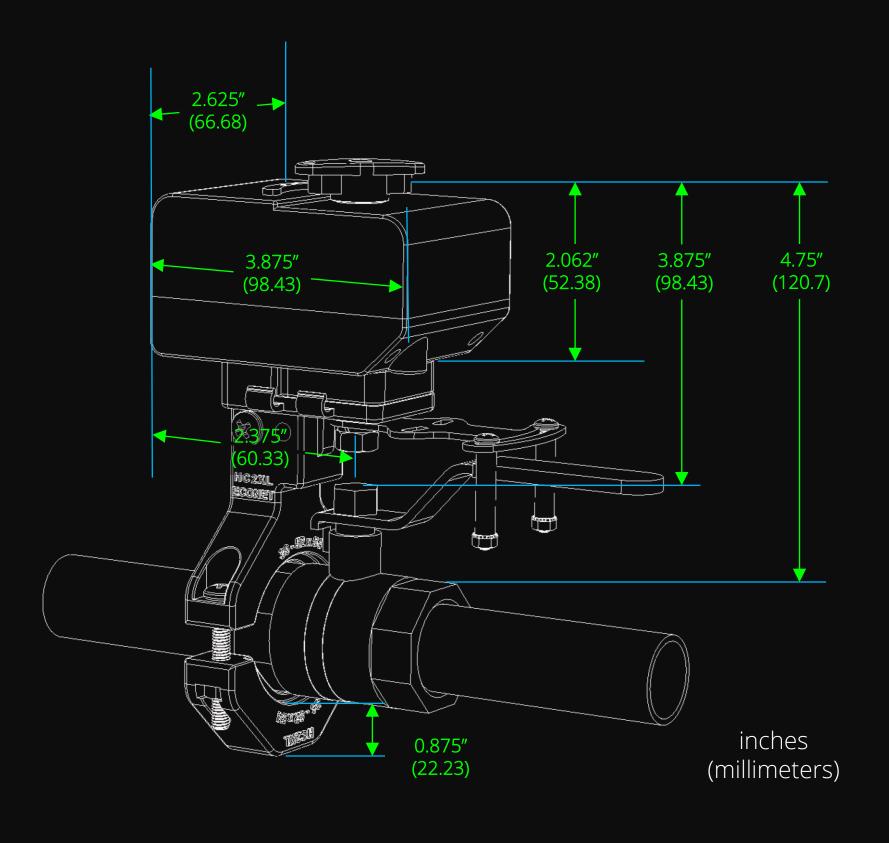

SPECIFICATIONS:

MOTOR: High Torque Geared Valve Motor

VOLTAGE: 12VDC (Supplied by Controller, Required, Not Shown)

HARNESS: 2-Conductor Cable, 28" (700mm) Long, w/Watertight Connector

COMPATIBLE VALVES: Supports 1/2", 3/4", 1", 1.25" and 1.5" Ball Valves

ENVIRONMENTAL: 32 to 122°F (0 to 50°C)

REMARKS:

- 1) Provide Overhead Cover if Installing Outdoors
- 2) Ball Valves Only
- 3) Valve Must Be in Good Working Order & Move Smoothly
- 4) ½" Solder & Crimp/PEX Valves May Require Optional HC2S Bracket. Refer to Website For Valve Compatibility Lists